

# SCIENTIFIC AMERICAN

Entered at the Post Office of New York, N. Y., as Second Class matter. Copyrighted, 1892, by Munn & Co.

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXVII.—No. 26.  
ESTABLISHED 1845.

NEW YORK, DECEMBER 24, 1892.

\$3.00 A YEAR.  
WEEKLY.

## NATURAL RESOURCES OF VIRGINIA AND WEST VIRGINIA.

BY B. G. UNDERWOOD.

In natural and varied resources, Virginia and West Virginia are unrivaled, and the marked advance made by both of these commonwealths during the past decade is worthy of note.

Virginia, as one of the original thirteen States, held first position up to the census of 1810, and, owing to the separation of West Virginia, in 1863, was No. 10; 1880, No. 14; and in 1890, No. 15. West Virginia gained one point in the last census, being No. 29 in 1880 and No. 28 in 1890.

We have preferred in the present



article to show a few of the many beautiful views with which both States abound, rather than any of the many manufacturing establishments which have lately been so largely established.

On this page is given one of many beautiful views on New River near Thermal, West Virginia, on the line of the Chesapeake and Ohio Railroad.


Saltpeter Cave, which has a peculiar history, is given on another page. From this cave the confederate government obtained niter for use in manufacturing gunpowder, and it was guarded during the war. It is situated near Natural Bridge, and below the mouth of the cave the little stream flows which runs under Natural Bridge. Saltville, Virginia, is also shown.

Here during the war a large force was stationed, as a large share of the salt used in the confederacy came from this point.

The rifle pits and old fortifications built to defend the salt works are in (Continued on page 404.)

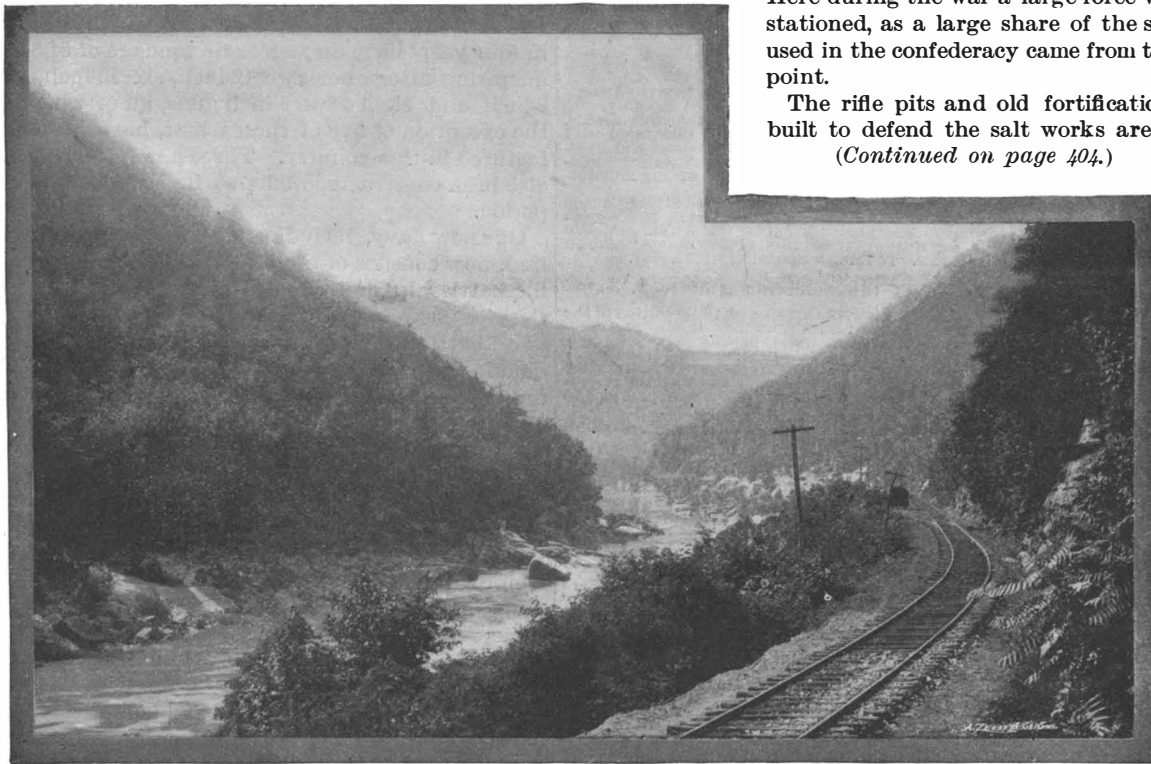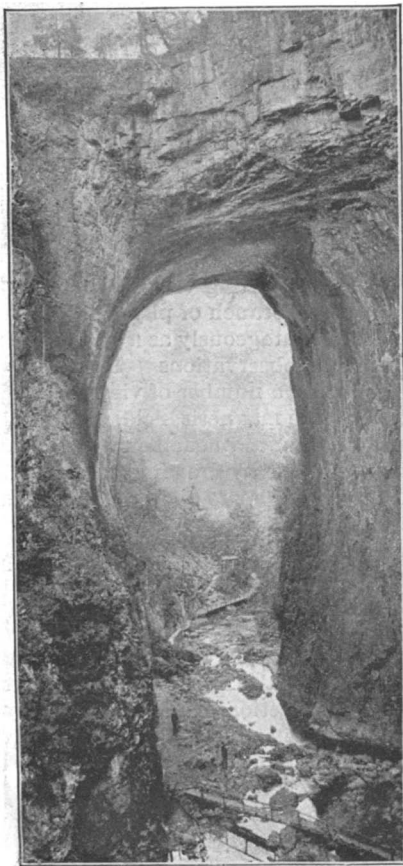

ON NEW RIVER CHESAPEAKE AND OHIO RAILROAD, NEAR THERMAL, W. VA.

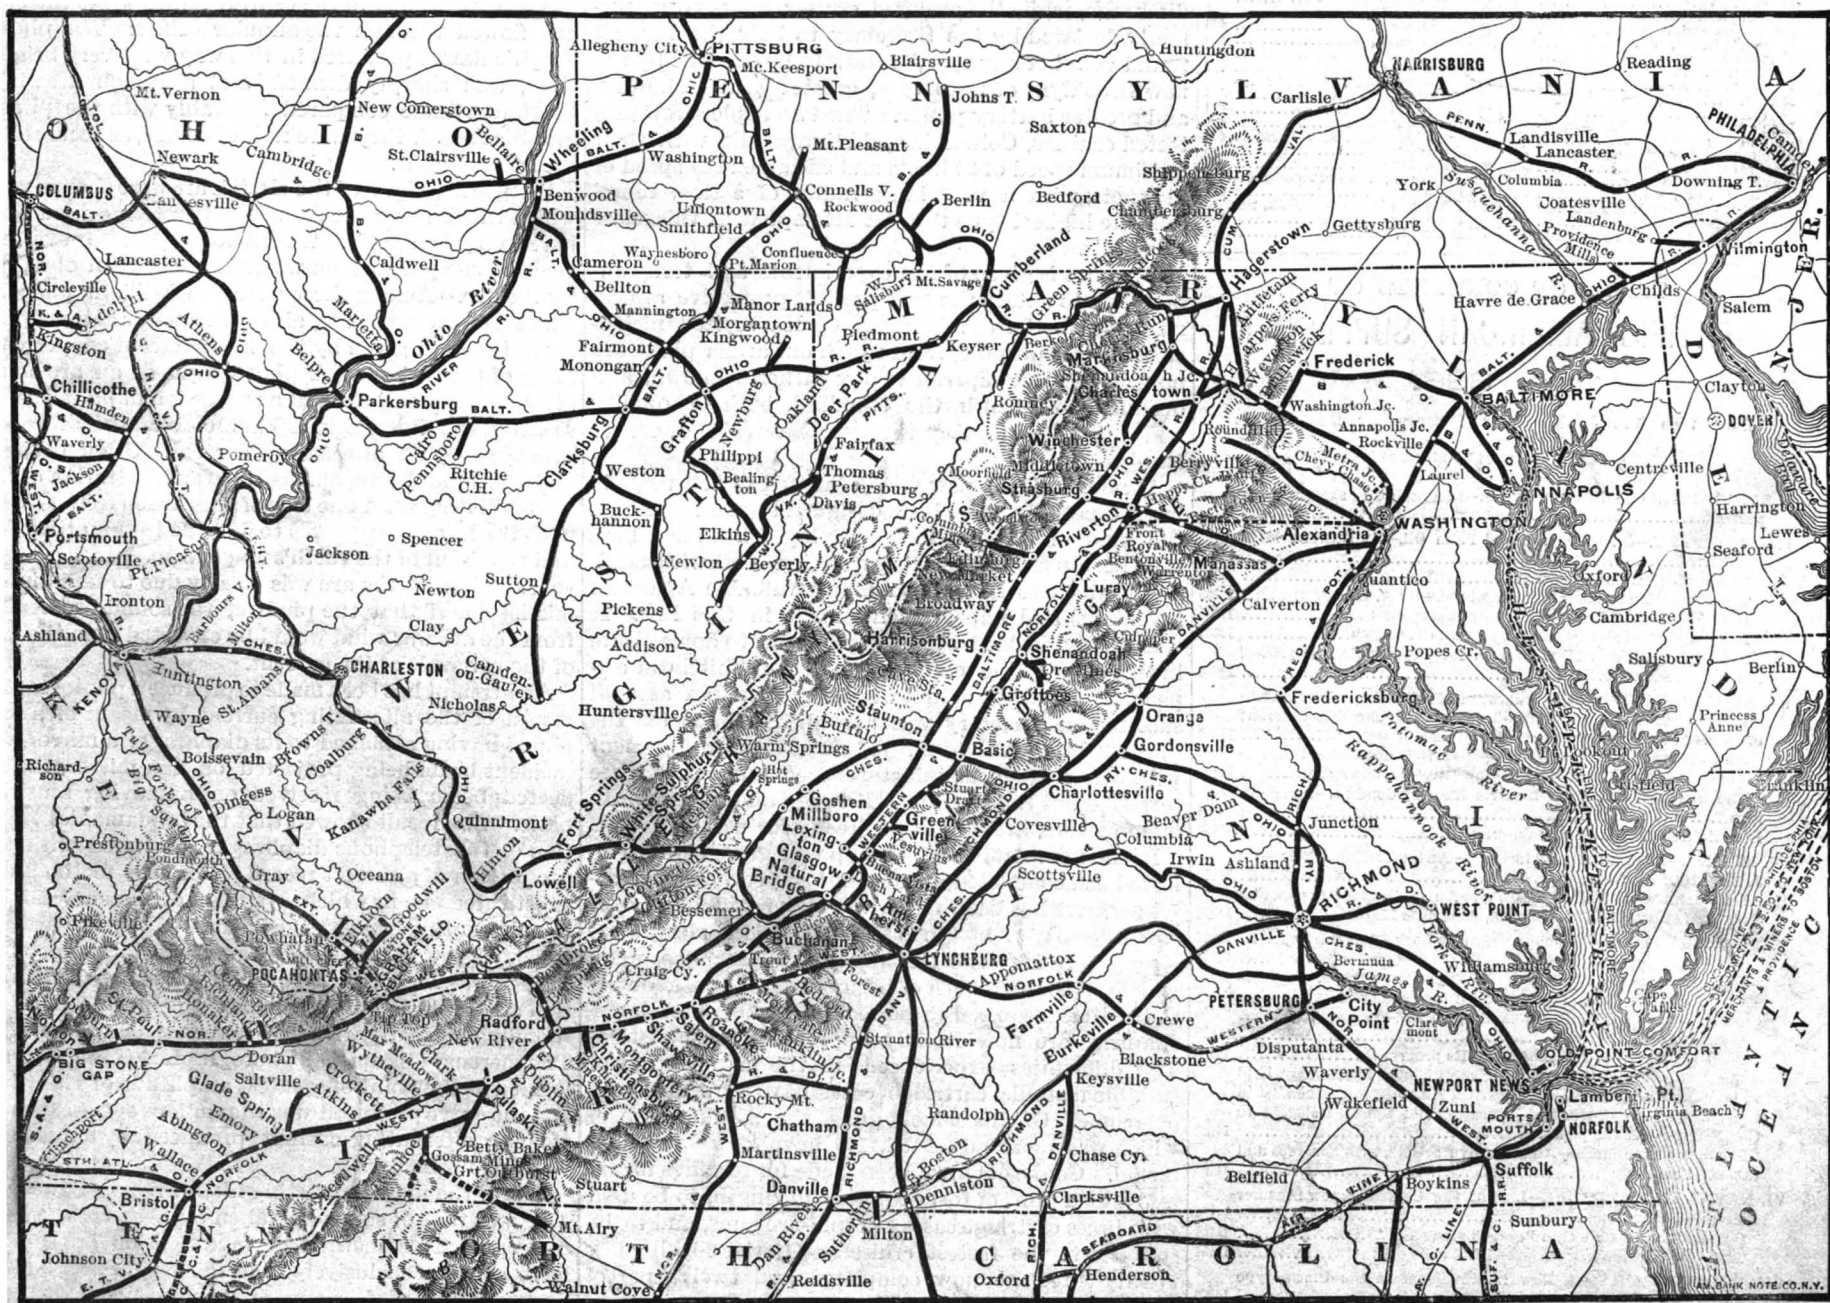

VIRGINIA AND WEST VIRGINIA—INDUSTRIAL TOWNS AND CITIES, RAILROAD TRUNK LINES AND STEAMSHIP ROUTES.



# Scientific American.

ESTABLISHED 1845.

MUNN &amp; CO. Editors and Proprietors

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN.

A. E. BEACH.

## TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico.....\$3 00  
 One copy, six months, for the U. S., Canada or Mexico..... 1 50  
 One copy, one year, to any foreign country belonging to Postal Union. 4 00

Remit by postal or express money order, or by bank draft or check.  
 MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

## The Scientific American Supplement

Is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, \$5.00 a year, for the U. S., Canada or Mexico. \$6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.  
 Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S., Canada or Mexico, on receipt of seven dollars. To foreign countries within Postal Union, nine dollars a year.

## Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details, pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, \$2.50 a year. To foreign Postal Union countries, \$3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, \$5.00 a year; combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, \$9.00 a year. To foreign countries, \$11.50 a year.

## Spanish Edition of the Scientific American.

LA AMERICA CIENTIFICA E INDUSTRIAL (Spanish trade edition of the SCIENTIFIC AMERICAN) is published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number of *La America* is profusely illustrated. It is the finest scientific, industrial trade paper printed in the Spanish language. It circulates throughout Cuba, the West Indies, Mexico Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. \$3.00 a year, post paid to any part of the world. Single copies 25 cents. See prospectus.

MUNN & CO., Publishers,  
 361 Broadway, New York

The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.  
 Readers are specially requested to notify the publishers in case of any failure, delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, DECEMBER 24, 1892.

## Contents.

(Illustrated articles are marked with an asterisk.)

|                                                |     |                                                       |     |
|------------------------------------------------|-----|-------------------------------------------------------|-----|
| Agricultural improvements, some new.....       | 408 | Photography in physical research.....                 | 400 |
| Bohemian twins, the.....                       | 403 | Polishing paste, Morley's.....                        | 402 |
| Boiler explosion, a.....                       | 401 | Power transmission.....                               | 401 |
| Boil feed valve, Farrand's.....                | 403 | Propeller forms for vessels.....                      | 401 |
| Books and publications, new.....               | 408 | Pulverizing mill plant, a.....                        | 408 |
| Brick pavements.....                           | 405 | Radford, Va.....                                      | 405 |
| Chimney, wrought iron, the tall-est.....       | 402 | Railway appliances, new.....                          | 408 |
| Danville, Va.....                              | 407 | Railway bridge, fall of a.....                        | 402 |
| Electric light suit, the great.....            | 408 | Red cross, prize, a.....                              | 403 |
| Engineers and architects, naval.....           | 402 | Refrigeration processes.....                          | 401 |
| Harper's Ferry, Va.....                        | 408 | Roanoke, Va.....                                      | 406 |
| Inventions, recently patented.....             | 408 | Saltville cave, Va.....                               | 404 |
| Iron works, the old Saugus.....                | 403 | Shenandoah Valley, Va., view in.....                  | 406 |
| Lanoline.....                                  | 407 | Sick and wounded, prize for apparatus for.....        | 403 |
| Match, friction, invention of (4617).....      | 409 | Steamers, Atlantic.....                               | 406 |
| Mechanical Engineers, American Society of..... | 401 | Steam radiators.....                                  | 401 |
| Mechanical inventions, recent.....             | 408 | Stinson Institute, New York.....                      | 403 |
| Natural Bridge, Va.....                        | 399 | Sugar crystals.....                                   | 403 |
| Navy, progress of our.....                     | 400 | Teeth mutilation.....                                 | 408 |
| Newport News, Va.....                          | 407 | Telegraphing without connecting wires.....            | 402 |
| Norfolk, Va. (Lambert's Point)*.....           | 407 | Virginia and West Virginia, natural resources of..... | 399 |
| Notes and queries.....                         | 407 | West Point, Va.....                                   | 404 |
| Patents granted, weekly record.....            | 408 |                                                       |     |

## TABLE OF CONTENTS OF SCIENTIFIC AMERICAN SUPPLEMENT No. 886.

For the Week Ending December 24, 1892.

Price 10 cents. For sale by all newsdealers.

|                                                                                                                                                                                                                        | PAGE  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| I. BIOGRAPHICAL.—Ernest Renan.—Biographical sketch, with portrait.....                                                                                                                                                 | 14157 |
| II. CHEMISTRY.—Oil of Coprah and Palm Oil.—By ERNEST MIL-LIAU.....                                                                                                                                                     | 14165 |
| Bacteriological Chemistry.....                                                                                                                                                                                         | 14164 |
| The Formation of Aluminum Sulphide.—By A. H. BUCHERER.....                                                                                                                                                             | 14165 |
| Determination of Lead.—By LUDWIG MEDICUS.....                                                                                                                                                                          | 14165 |
| Extract of Beef and Pepsin.—By JAMES T. SHINN.....                                                                                                                                                                     | 14165 |
| A New Pipette and New Burette for Volumetric Analysis.—2 illustrations.....                                                                                                                                            | 14164 |
| III. ELECTRICITY.—Electric Tramway at Paris.—An article describing the storage battery system.—3 engravings, showing different methods of coupling up the accumulators and motors.....                                 | 14152 |
| An Improved Overhead System.—An article describing the trolley system adopted in South Staffordshire.—9 engravings.....                                                                                                | 14152 |
| The Siemens & Halske Electric Railway Conduit.—4 engravings.....                                                                                                                                                       | 14153 |
| Electric Acidimeter.—1 engraving.....                                                                                                                                                                                  | 14153 |
| IV. MINING.—Mining Industry in Peru.—An interesting article.—By J. BASADRE.....                                                                                                                                        | 14156 |
| La Guaira and Caracas Railway.—An abstract of a paper by EDWIN HARRY ALFRED HEINKE, Associate M. Inst. C. E.....                                                                                                       | 14156 |
| V. MISCELLANEOUS.—Isaachsen's Safety Lock.—1 engraving.....                                                                                                                                                            | 14157 |
| The Brown Segmental Wire-Wound Gun.—1 engraving.....                                                                                                                                                                   | 14157 |
| The Manufacture of Liquors and Preserves.—By J. DE BRE-VANS, Chief Chemist of the Municipal Laboratory of Paris.—Continued from page 14144, SUPPLEMENT, No. 885.—1 engraving.....                                      | 14159 |
| Wood Pulp.....                                                                                                                                                                                                         | 14159 |
| Pratt Institute.—A full account of its progress.....                                                                                                                                                                   | 14160 |
| The International Congress of Experimental Psychology, held in London, August, 1892.—By ARTHUR MACDONALD, specialist in the United States Bureau of Education and Official Delegate to the Congress.—A full paper..... | 14162 |
| Seedling Sugar Canes.—An extensive article, with analyses and tables.—1 engraving.....                                                                                                                                 | 14163 |
| VI. NAVAL ENGINEERING.—Loss of the Central Screw Steamer Louvre.—1 engraving.....                                                                                                                                      | 14154 |
| Commodore Folger's Gun Boat.—3 views.....                                                                                                                                                                              | 14154 |
| The New War Ship Brooklyn.—1 full page engraving.....                                                                                                                                                                  | 14154 |
| VII. PHOTOGRAPHY.—A New Improvement in the Platinotype Process.—By P. C. DUCHOCHOIS.....                                                                                                                               | 14166 |
| VIII. TECHNOLOGY.—Wm. Young's New Oil Gas Plant.—1 illustration.....                                                                                                                                                   | 1416  |

## PROGRESS OF OUR NAVY.

It is gratifying to note the very substantial progress which has been made, as evidenced in the annual report of Secretary Tracy, in the building up of our new navy. It is, as the secretary says, "a progress both in ships and in ordnance, by which the United States has emerged from its condition of helplessness at sea, and, by the employment of its own resources, has distanced its more experienced competitors, marking an epoch in the naval development not only of this country, but of the world."

On March 4, 1889, there were in our navy only three modern steel vessels, with an aggregate tonnage of 7,863 tons, and mounting thirteen 6-inch and four 8-inch guns, the forgings for which last, as well as the shafting for the vessels, had been purchased from abroad, as they could not be made in this country. On the 4th of March next it is expected that there will be twenty-two modern vessels in commission, while nine additional vessels, none of which in speed, armor and armament has a superior in any foreign navy, promise to be ready for launching within the next twelve months. The nineteen vessels thus added to the navy in four years have an aggregate tonnage of 54,832 tons, mounting altogether two 12-inch, six 10-inch, sixteen 8-inch and eighty-two 6-inch guns, all of which, with the exception of five of the earliest, have been manufactured in this country. Three new steel tugs have also been constructed and put in service during this period.

Our new navy, including all vessels built or authorized, now consists of the following vessels: One seagoing battleship (first-class)—Iowa; three coast-line battleships (first-class)—Massachusetts, Indiana, Oregon; two battleships (second-class)—Maine, Texas; six double-turreted harbor defense vessels—Puritan, Monterey, Miantonomoh, Monadnock, Terror, Amphitrite; two armored cruisers—New York, Brooklyn; one ram; two protected cruisers of extreme speed—Columbia, Minneapolis; fourteen cruisers—Olympia, Baltimore, Chicago, Philadelphia, San Francisco, Newark, Charleston, Boston, Atlanta, Cincinnati, Raleigh, Detroit, Montgomery, Marblehead; one dispatch vessel—Dolphin; six gunboats—Yorktown, Concord, Bennington, Machias, Castine, Petrel; one dynamite vessel—Vesuvius; one practice vessel—Bancroft; two torpedo boats—Cushing, No. 2. Making a total of forty-two vessels.

The three great first-class battle ships have a displacement of over 10,000 tons each, are protected by 18 inches of armor, carry 13-inch guns, and throw an aggregate of over three tons of projectiles at a single discharge, while the armored cruiser New York, formerly declared by the Secretary to be "the best all round vessel of any type," is now to be outdone by the new Brooklyn, of 9,150 tons, greater coal endurance and greater battery power. The two triple screw protected cruisers, Columbia and Minneapolis, with their maximum speed of 22 knots and sustained sea speed of 21 knots, with a very large radius of action, represent the highest type thus far attempted in this class of vessels.

A resume is given of the experiments and tests undertaken to obtain the best possible protective armor, resulting in the development of Harveyized nickel-steel for this purpose, from which our armor plates are now made, "far superior to any hitherto known, and destined to furnish the standard, both of quality and manufacture, for the great naval powers of Europe."

Although all our new vessels, as well as the torpedo boats especially, have been designed to use torpedoes, the kind of torpedo to be employed has for a long time been a most perplexing question, notwithstanding that there have been many valuable American inventions and improvements made in this line. It was finally decided by the department to domesticate in this country the manufacture of the Whitehead torpedo, whose use in actual war had proved an assured success, and a factory was accordingly built for the purpose in Brooklyn, N. Y., under an arrangement with the foreign manufacturers. A number of these torpedoes, of the best modern design and of American manufacture, are now nearly ready for use.

In the manufacture of high power guns, eighty-two have been completed during the last year. The greatest progress has been made with the rapid-fire gun, of which twenty-eight 4-inch and eleven 5-inch have been completed since the last report. These guns, upon which little had been done up to last year, owing to the time required to perfect a suitable breech mechanism, are now rapidly approaching completion. The difficulties experienced in the manufacture of suitable metallic cartridge cases have now also been overcome. Of the 6-inch guns, the manufacture of which was most advanced, 135 have now been completed. Contracts have been made for forgings for six new 6 inch guns of forty calibers in length, to be used with brass cartridge cases as rapid-fire guns, and to be supplied to the fastest cruisers. Of the 8-inch guns, twenty-three are now completed and twelve partly completed. All the 10-inch guns, twenty-five in number, have been completed and are ready for installa-

tion on the ships for which they are intended. Five 12-inch guns have been completed, of which two have been proved and are being installed on the Monterey. The first 13-inch gun is approaching completion, and the forgings of the second have been received.

The development of a new smokeless powder, and of a safe high explosive for the shells in high-power guns, and the manufacture of armor-piercing projectiles equal or superior to those of any other nation, are each the subject of a discriminating and most satisfactory notice by the secretary. As to smokeless powder, it is said that the department, "by independent investigation and experiments, conducted by its own agencies at its own establishments, has succeeded in developing a smokeless powder which in efficiency and endurance gives better results than any known powder abroad." In conclusion, the secretary expresses the opinion that there can be but little doubt, in view of the progress of naval science, that the advance toward higher and higher types will continue steadily in the future, a progress in which American inventors will, doubtless, be full participants.

## THE USE OF PHOTOGRAPHY IN PHYSICAL RESEARCH.

This is the title of a very interesting and instructive lecture delivered before the Physical Department of the Brooklyn Institute of Arts and Sciences, Dec. 13, by Prof. Edward L. Nichols, of Cornell University.

The lecturer began by stating that photography is now used in almost every branch of physical research; that it is often used advantageously as a substitute for drawing when making observations. Prof. Nichols projected upon the screen a number of views, illustrating the exploration of the magnetic field, showing the lines of force, and of various phenomena which have heretofore been illustrated by drawings made by the hand of the observer. In some cases the hand-made drawings compared favorably with the photographs, while in others they appeared to be incorrect. The lecturer spoke of the value of photography in making long-continued observations; also in making observations of phenomena developed instantaneously, as in the case of lightning flashes, electrical discharges, sound vibrations, etc. He also showed upon the screen a plate illustrating diffraction fringes formed by a small triangular aperture in a piece of tinfoil, the figure being very intricate, and altogether different from what might have been expected.

An interesting illustration was that of photographs of the manometric flame, the flame for this purpose being produced by a concentric burner, the illuminating gas being supplied to the central orifice while the oxygen flowed through the annular orifice. The photographic flames produced in this way were very bright, clear, and sharply defined, and although drawings heretofore made compared favorably with the photographic record, they were not, of course, as accurate as the photographs.

Interesting views of the electric arc were shown, with which the hand-made drawings heretofore used compared very favorably. The photographs, however, revealed some phenomena which had not been observed by the eye. Among these were the brilliant particles thrown off from the arc, also the superior actinic quality of the light given by the incandescent copper covering of the carbons. A photograph of an arc on an alternating circuit showed a succession of light flashes, proving the intermittent character of the arc when produced by an alternating current. Other peculiar features were shown, among them an illustration of the arc oscillating from one side of the carbon to the other. This the lecturer supposed to be due to the attraction and repulsion of the earth's magnetism. He stated that the singing of the arc was clearly due to rapid intermissions, and that the pitch of the sound proceeding from the arc was what would be expected from the rate of the reversals of the current.

An attempt has been made to produce a photographic record of the alternating current by means of a telephone having attached to its diaphragm a mirror, the incident beam being projected on the mirror, the reflected beam being received on a moving sensitive plate. The result showed that the fundamental vibration of the telephone diaphragm interfered with the production of a correct record. For this method was substituted one in which a stream of mercury carried the alternating current, the apparatus being so arranged as to allow the stream to pass between the poles of a magnet. The mercury was oscillated by the attraction and repulsion of the magnet, the movement correspondingly exactly with the reversals of the current. The mercury stream was photographed through a slit located at the point of greatest amplitude of vibration, and the curve produced was the sinuous curve expected from an alternating current produced by a machine working normally.

One of the most interesting illustrations of the evening was that of sun spots taken by means of the spectroscopic method of investigation appears to have shown conclusively that the fecula around the dark portion of the sun spot correspond with the flames projected from the sun.

American Society of Mechanical Engineers.

Papers of more than usual interest and containing much original and important matter were read at the recent meeting in this city. In a paper, an Analysis of the Shaft Governor, the remarkable fact was brought out that, notwithstanding the great importance of the governor as a means of protection from accident, not to mention its other uses, not a single complete work, treating of this, either descriptive or scientific, has ever been brought out.

[Readers of the SCIENTIFIC AMERICAN will recall the series of fly-wheel breaks during the past year, a notable one in the Amoskeag mills at Manchester, N. H., in all of which the governors failed to prevent the racing which led to disaster.]

The author of the paper described a governor of his own construction, which, if it will work with certainty under all conditions, is a remarkable design. After a mathematical description of the forces involved, and his mode of dealing with them, he says of the mechanical result, that is to say of the new governor:

"At a recent test of the device in an electric light station, on an engine of 500 horse power, running at a speed of 220 revolutions per minute, where the balance found it necessary to resist reciprocating pressures of 2½ tons at each extreme of the stroke, there was not even one revolution difference between the corresponding speeds of no load and full load."

John T. Hawkins, of Taunton, Mass., described a new graduating steam radiator which he had been led to design because of the well-known defects of those now in the market. He said:

"The impossibility of adjusting the heating effect of the ordinary steam radiator to changes in the temperature of the outer air is probably the greatest objection to that system; the facility with which this adjustment is effected in the hot water systems constituting the principal advantage which the latter possess over the former; while the simplicity and perfection with which the combustion in the furnace is automatically regulated in the steam system gives it an equally decided advantage over the hot water system; to say nothing of the greater first cost of the latter."

His own design was operated in his own apartments last winter, working admirably (that's what he says of it), giving all needed relief from an overheated room in mild weather, while giving ample warmth when the thermometer ranged low. It also conclusively established its immunity from leakage when, upon a second occasion, the attendant upon the boiler forgot to shut off the boiler feed and filled every radiator in the house with water, this being the only one out of nineteen that was not discharging water pretty freely about the floors from the automatic air valves, until the surplus water was drawn from the system through the boiler blow-off cock.

An elaborate and lengthy paper was read by George Richmond, of New York, on the Refrigeration Process and Its Proper Place in Thermo-dynamics. We may sum it up by saying that the fundamental principle insisted upon is that heat can leave a body only by transformation into work or by transfer to some other body. The graphical method, though it can give no information as to the actual transfers between the steam and the cylinder, is peculiarly adapted to the representation of such transfers. This subject is merely touched upon in an application of the principles to the study of the practical refrigeration process, the object of the paper being principally to present a method which it is believed will be found peculiarly useful to those who are not familiar with the analytic methods and in sufficient completeness to enable a judgment to be formed as to its merits.

The mathematical formulæ introduced are in a large measure due to the translation of the results into the usual notation, and there are few questions arising in practice, so the author says, which a draughtsman could not solve in an intelligible and accurate manner by the methods with which he is most familiar. One noticeable result is the graphical determination of the amount of superheating required to produce any degree of dryness finally in the steam cylinder (apart from the action of the walls) or the superheating of a vapor by compression—results for which Zeuner's formula for superheating gases is generally used. The value of this formula is not in question, so says the author, but as a general principle it is unsatisfactory to use formulæ on trust when we can reach the same results directly by easily understood methods.

In the paper, Tests on the Triple Engine at the Massachusetts Institute of Technology, these tests having been a part of the regular work in the laboratory of steam engineering for the last school year, the conclusion reached is that "it makes but little difference where steam jackets are used on an engine, provided the jacketing is carried far enough and not too far."

This is certainly a remarkable conclusion and seems scarcely to compensate for a season's work.

A Variable Speed Steam Power Transmission, the invention of E. F. Gordon, M.E., was described with much detail. Simply stated, the device consists of a deeply grooved pulley, split by a plane perpendicular

to its axis and dividing it symmetrically, with means for varying the distance of the two parts, one from the other.

Given a belt adapted for the purpose, it will, in running on such a pulley, lie nearer the center as the two parts are more widely separated, and recede as they are brought nearer together. Such a pulley may be used on either the driving or driven shaft, or both, and it is evident that the shafts may be at any practical distance apart, also that the greater the pull on the belt the greater its hug and consequent freedom from slip. In some cases it is desirable to place a loose pulley between the two parts referred to, making a compact arrangement for starting, stopping, and varying speed in the space ordinarily occupied by a single pulley of the usual style.

W. F. Durand, of Ithaca, N. Y., read a paper on the Limit of Propeller Efficiency as Dependent on the Surface Form of the Propeller, setting forth the result of a long series of studies and some striking formulas by which he endeavored to show:

(1) That the limiting efficiency of the element of the surface of a propeller, working under any given conditions, is an absolute geometrical quantity, depending solely on its direction and motion, and on the motion of the ship.

(2) That the limiting efficiency of an entire propeller, composed of helicoidal surfaces of the same uniform pitch, is equally simple and definite.

(3) That the limiting efficiency of propellers in general, whether considered as surfaces not truly helicoidal or as solids such as are actually used, depends on the additional consideration of the distribution of work over their surfaces. The latter being a subject of great complexity, and depending on the ship as well as on the propeller, does not admit of general analytical treatment. It is shown, however, that certain limits may usually be laid down between which the efficiency in any given case must lie; and in the case of solids, as actually used, it is shown that such suppositions as can be made lead to the natural conclusion that thickness in general is detrimental to efficiency.

Samuel Webber, of Charlestown, N. H., gave the tabulated result of some interesting Tests of Driving Belts, the result of the tests. The strain on the belts was 83½ pounds per inch, though at times it exceeded this somewhat. Summing up, the author said:

"The 'leather-lined canvas' belt gave excellent results, as before, but its opponents object to it from the difficulty of making perfect joints by lacing; and the 'slotted' leather belt called the 'Eureka,' when dressed so as to be perfectly supple, gave very nearly as high results, and showed about the same coefficient of friction, which diminished a little in the last test, when the strain was increased from 83½ to 91½ pounds per inch."

An interesting boiler explosion was the subject of a paper by F. Daniels, of Worcester, Mass., describing the precautions taken by the owners of the mill by whom he is employed to secure sound material for a new set of horizontal tubular boilers, subjecting all the plates to a careful test before they were made up; and how that even then some of them proved to be weak, and a rupture (mistakenly called "explosion") occurred. The author said: "These boilers have been in successful operation for nearly six years and are still in use. They are inspected every week. The water is run out, the manholes removed, and the interior as well as the exterior of the boilers carefully examined. As the water in the streams in the vicinity of Worcester is very pure, coming as it does from the granite hills, we never find scale in the boilers, but in the spring and fall during high water it is not uncommon to find a small deposit of debris, which is carefully washed out."

"With all this care, the accident was to us a real surprise. When it happened, the plant was running as usual, but the boilers were somewhat forced, although not to any extreme limit. Without any warning whatever, and with very little noise, the firing doors of the furnace were burst open, coal, ashes and water thrown out, and the boiler house, in an instant, filled with steam."

"As soon as an examination could be made, it was found that one of the plates in the third row, just over the most intense heat, had bagged and ruptured, leaving an orifice about one inch in diameter, thinning the metal around the orifice to a knife edge. The remainder of the shell was not damaged, because the boiler quickly emptied itself of water and steam, which extinguished the fire and cooled the brickwork. The analysis of the ruptured plate is as follows:

|                 |       |           |
|-----------------|-------|-----------|
| Phosphorus..... | 0.063 | per cent. |
| Sulphur.....    | 0.022 | "         |
| Silicon.....    | 0.024 | "         |
| Manganese.....  | 0.261 | "         |
| Carbon.....     | 0.10  | "         |

"It was suggested that this thin scale covered the entire surface over the fracture before the rupture, and was caused by oil which had become burned onto the plate; but as the feed water for this plant was supplied from a closed heater, it is difficult to see how oil could have found its way into the boiler. We have been informed by Mr. Robinson (who made the boiler)

that he was called a short time ago to examine a boiler of the same construction as the one referred to in this paper. It had been overheated directly over the fire box, making the shell plates wavy. After carefully drawing the water from the boiler, nothing could be discovered on the plate excepting a whitish powder. There was neither scale nor mud.

"The conclusions the writer arrives at are that the importance of mechanical, physical and chemical tests cannot be overrated. While the plate makers invariably subject their plates to tests and stamp them accordingly, at the same time a confirmation of quality by the consumer is desirable, for we have seen that in the tests at Watertown one plate was condemned. If the ruptured plate had been of improper material or had contained sufficient carbon to harden when the water came in contact with the overheated plate, a crack might have developed, resulting in a serious explosion, possibly destroying the entire plant and causing a loss of life."

In the discussion that followed the reading of this paper, J. McBride, an experienced boilermaker, gave it as his opinion that dirt caused the trouble. J. F. Holloway, another expert, attributed it to a blister or air bubble in the plate. Geo. H. Babcock, the boilermaker, said: "The dirt will gather at a definite point; it will not spread over the bottom of the boiler, the circulation tending to bring it toward one point, where it will gather in a mass and cause a burning out."

Professor Denton said: "It has been shown that a scale of very small thickness, which would ordinarily escape the attention of a boilerman, would cause this result."

The Process of Cutting Cams, was read by W. A. Gabriel, of Elgin, Ill. Mr. Gabriel is a designer of small and intricate machinery for the manufacture of parts of watches and, in the course of his experience, found it necessary to produce cams of greater accuracy than could be obtained by the old and well known ways.

A paper on Tests of a Pump Receiving Suction Water under Pressure, described a series of experiments made with a view of determining the advantages of the plan of feeding water under pressure to a direct-acting pump over that of drawing the water from a receiving well. No measurement of the water pumped under the two conditions was attempted, as it went directly into the supply pipes; but the pumps appeared to work more smoothly and to keep the stand pipe level more constant under pressure than when sucking.

Experimental Determination of the Heat Generated per Candle Power by Oil and Gas Lamps, was the title of a paper read by D. S. Jacobus, of Hoboken, N. J. J. B. Stanwood, of Cincinnati, O., treated Strains in the Rims of Fly-band Wheels, the conclusion being that this strain varies nearly as the rim velocity squared, and, if the velocity is doubled, the strain is quadrupled and the factor of safety is reduced to a minimum.

A highly instructive series of experiments was described by R. C. Carpenter, of Ithaca, N. Y., on Comparative Variation in Economy with Change of Load in Simple and Compound Engines, Effect of Steam Jackets on High Speed Engines. By the use of diagrams, the author was enabled to show the actual results obtained very clearly. From these it appeared that for most conditions the engine with the cylinders steam-jacketed consumed less than when not jacketed; that this difference was greatest for the least loads, was probably about 2 per cent at rated capacity, and the conditions were reversed for heavy loads, the un-jacketed cylinder becoming the more economical.

Considering these results only for loads between 60 and 120 horse power, the author found as the average:

|                             |                                                        |
|-----------------------------|--------------------------------------------------------|
| With steam in jackets....   | 19.10 pounds of dry steam per I. horse power per hour. |
| With no steam in jackets, { | 20.1 pounds of dry steam per I. horse power per hour.  |

These tests, the lecturer said, show in all cases a slight gain due to the use of the steam jackets, the amounts varying in the different tests to from 2.75 per cent to 5 per cent of the steam consumed. The use of the high pressure jacket alone seems to have produced no especial effect, the results being better without it.

It should also be noticed, as pointed out by Dr. R. H. Thurston in Paper CCCXXV., Vol. XII., of the Transactions, that in actual use the jackets would produce somewhat better results than shown in the test, due to the fact that the water of condensation from the jackets would ordinarily be returned directly to the boiler, thus saving the heat required to raise a given weight of feed water through the required range of temperature.

Strains in Lathe Beds was the title of a paper read by G. W. Bissell, Ames, Iowa. De Volson Wood read one on Hydraulic Reaction Motors and another on Negative Specific Heat.

TELESCOPIC steel masts or rods are to be used in lighting the public squares in Brussels. The object of this system is to preserve the beauties of the parks in the daytime.



**Telegraphing Without Connecting Wires.**

Interesting experiments have recently been made under Mr. W. H. Preece, with a view to electric communication between distant points without wire connection, namely, through air, water, or earth. Mr. Preece proposed to conduct experiments in three different methods. First, by running a wire along the shore on light poles for a distance of about a mile, and a second wire from stem to stern of the ship, the two acting upon each other inductively through the intervening space; secondly, by suspending a short line over the side of the ship, so that it might dip into the sea in the direction of the end of the shore line, to work by conduction through the sea; and, thirdly, by running out a light cable from the shore to the ship, terminating in a coil at the bottom of the sea, near the ship, but not attached to it, while another coil is placed on board. These two coils are expected to act inductively, and to give ample sound on telephones by means of rapid alternations. The experiments by the first method have been carried to a successful issue within the last few days, the shore wire having been erected along the Welsh coast, commencing at Lavernock Point, a little south of Cardiff, and proceeding for a mile in the direction of Lavernock House. The light-ship was represented for the occasion by the island of Flat Holme, in the Bristol Channel; and the line there erected, parallel to the first and three miles distant from it, was about half a mile long. The shore line was furnished with a powerful generator at Lavernock Point, and the island line with a sounder to receive the messages. The result was that the words dispatched into the mainland wire were heard on the island with perfect distinctness, but we can scarcely admit that Flat Holme represents the conditions of a ship. This method is analogous to that patented by Mr. Edison for establishing telegraphic communication between two vessels when at sea.

**Society of Naval Architects and Marine Engineers.**

Prominent men in the shipbuilding and shipping interests of the United States have completed the preliminary organization of a professional society, to be called the Society of Naval Architects and Marine Engineers, whose object will be to promote the art of shipbuilding in all its branches, both commercial and naval. The committee of organization, consisting of William H. Webb, of New York; Lewis Nixon, general manager of Cramp's Shipbuilding Company, of Philadelphia; Col. E. A. Stevens, of Hoboken; Francis T. Bowles, Naval Constructor, United States navy; and (*ex-officio*) Clement A. Griscom, president of the International Navigation Company, expect to incorporate the society in New York and are now sending out invitations to membership.

**FALL OF A RAILWAY BRIDGE AT TERRE HAUTE.**


Our engraving is reproduced from a photograph showing the very serious consequences which resulted from a rather slight butting collision at Terre Haute, Ind., on October 28. The bridge, which carries the track of the Cleveland, Cincinnati, Chicago and St. Louis road, crosses the Wabash River at an elevation of about 50 feet above the water. The cars which appear at the right of the engraving were those of a train which had been run upon the bridge for a few minutes to get out of the way of another train, switching in the yard. While it stood there it was run into by the stock train from the opposite direction and a truss was broken sufficiently to cause it to give way, letting both engines and eight cars of cattle and coal into the river. One of the engines was entirely submerged. One engineer was killed. The other men on both trains saved themselves. The published accounts indicate, so says the *Railroad Gazette*, that there was fault on both sides; that the brakeman of the standing train did not go far enough with his flag, and that the approaching train was running too fast.

**Morley's Polishing Paste.**

Made by calcining flint and grinding the calcined material to a very fine powder, then mixing with fat, oil, or other such liquid to make a suitable paste, which "is put up or sold preferably in tins or boxes," and on the application of a little moisture is ready for use." For cleaning glass the levigated flint is sold dry to be used with water.

**THE TALLEST WROUGHT IRON CHIMNEY.**

The annexed illustration is from a photograph of a large wrought iron chimney, erected at Darwen, in North Lancashire, by the Pearson & Knowles Coal and Iron Company, of Warrington, for the Darwen and Mostyn Iron Company. It was designed, says the *Engineer*, by Mr. J. T. Smith, of Rhine Hill, Strat-

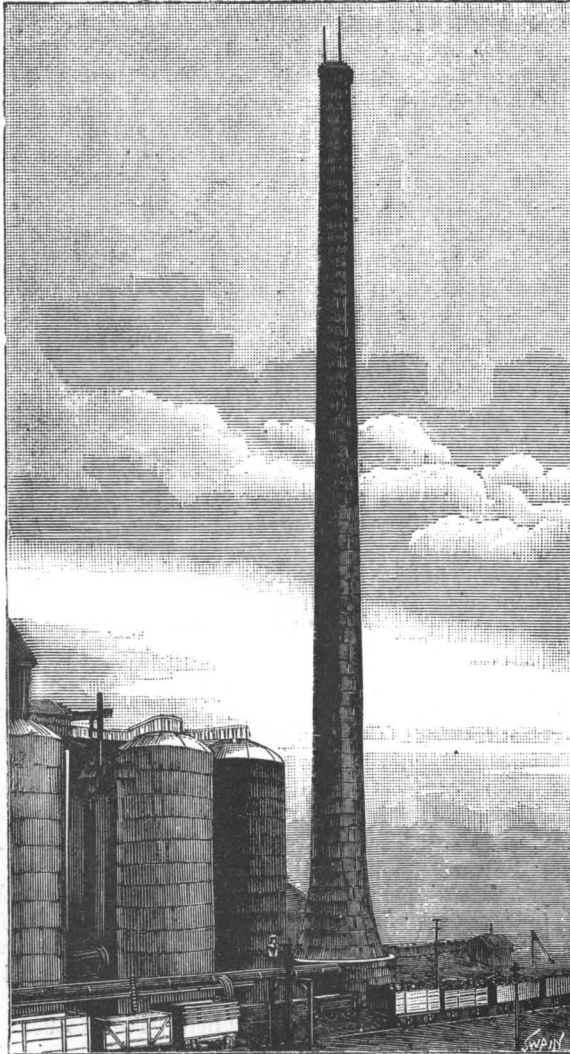**WROUGHT IRON CHIMNEY AT DARWEN.**

ford-on-Avon, and the Pearson & Knowles Coal and Iron Company, to supersede brick stacks of the ordinary description, which were used for carrying off the gases from the blast furnaces of the Darwen and Mostyn Iron Company. This chimney is 275 feet high from foundation to top, and the tallest iron structure of its kind in Great Britain. Shortly after erection, and before more than half the lining was in, it withstood without injury and in a perfectly satisfactory manner one of the severest gales experienced for many years.

The following are a few general particulars of this chimney. As stated above, the total height, including

10 feet 6 inches; taper from top of cone to top of chimney, 6 feet; number of tiers of plates, 66; total number of plates in chimney, 308; diameter of base plate, 27 feet 6 inches; base plate made in six segments; number of rivets used in construction, 17,000; twelve foundation bolts, 16 feet 3 inches long, by 2½ inches diameter, with swelled and screwed ends; total weight of iron work, 114 tons 7 cwt.; thickness of brick lining at bottom, 1 foot 6 inches; thickness of brick lining at top, 3 inches; time occupied in erection of iron work, 11 weeks; total weight of chimney, including foundations and lining, about 1,100 tons; total weight of a brick chimney same height, over 3,000 tons.


This system of construction, for chimneys about the same height, has many advantages. These should receive the careful consideration undoubtedly due to them by all interested in the subject. In the first place, there is a saving in the cost as compared with a chimney of similar height built in any other manner. The time occupied in erection is also much shorter, and, under certain circumstances, this must be a considerable advantage, especially as the work is not affected or stopped by frost. It is well known that the uncertain and imperfect nature of ground upon which a chimney may have to be constructed is often a source of grave anxiety to owners of chimneys, architects and builders. If, therefore, a reduction from the ordinary weight can be effected by building with iron, without, at the same time, in any way impairing the margin of safety, this should be a recommendation to the system. It is proved that iron chimneys are of much less weight. There is also the satisfaction of knowing that chimneys built in this way are necessarily free from the liability to sudden collapse, and to cause accident by material falling from them, due in brick chimneys to the cracking and displacement of the external surface, caused by the high temperature of the gases or defective workmanship. An additional advantage of this form of construction, to the Darwen and Mostyn Iron Company, is the freedom from damage to their chimney by excessive heat, produced in the manufacture of ferro-manganese.

In America there are many wrought iron chimneys erected in connection with different works. The Pennsylvania Steel Company have no less than eight such chimneys, varying in height from 110 feet to 170 feet. The Cleveland Rolling Mill Company, Ohio, has one 213 feet high. In France and Russia iron chimneys are also used. M. M. Schneider & Company have one at Creusot, France, 280 feet high, and Mr. Bhekol-din, of Kineshnia, Russia, has one at his paper mills 170 feet high. There are also several smaller chimneys of the same kind in this country, in addition to that at Darwen already described. The Pearson & Knowles Coal and Iron Company, Limited, has seven, varying in height from 50 feet to 87 feet. The Acklam Iron Company, Limited, has two, 165 feet high, at the Acklam iron works, near Middlesbrough. There is one at Messrs. B. Heath & Sons works, Stoke-on-Trent, and also at the Nine Elms cement works, and several at different iron works in the Middlesbrough district.

The tallest brick chimney in the United Kingdom is at Glasgow. It is 468 feet from bottom of foundation to top of coping; diameter outside at ground line, 32 feet; at top, 13 feet 4 inches; thickness of brick work at bottom, 5 feet 7 inches; at top, 1 foot 2 inches. No piles were used in the foundation, the blue clay upon which the chimney was built proving satisfactory. One million and a half bricks were used in its construction, and the time occupied about three years. Total weight, about 8,000 tons; total cost, about £8,000. The next tallest chimney, also at Glasgow, is 455 feet 6 inches from bottom of foundation to top of coping; outside diameter at foundation, 50 feet; at ground line, 40 feet; at top, 13 feet 6 inches.

A short account of the successful demolition of a tall brick chimney may be interesting. Some years ago the tall circular brick chimney at Messrs. Muspratt's chemical works, Warrington, 406 feet high, 46 feet diameter at base, 17 feet diameter at top,

was destroyed by gunpowder. The works having been moved to another locality, the chimney was not required. Mr. Stephen Court, engineer and architect to the St. Helens Canal and Railway Company, superintended these operations. A number of holes were dug

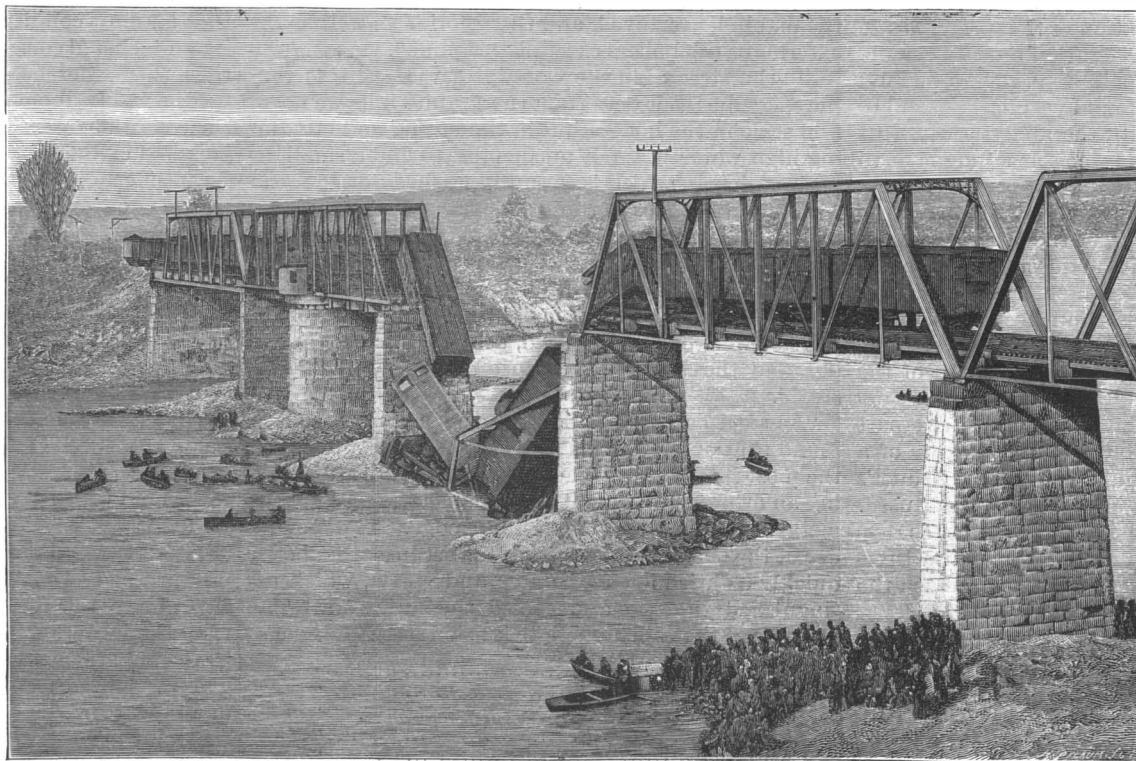**FALL OF A BRIDGE FROM COLLISION.**

foundation, is 275 feet; height from bottom of base plate to top of chimney, 260 feet 6 inches; distance from bottom to top of cone, 28 feet; distance from top of cone to top of chimney, 232 feet 6 inches; taper from bottom to top of cone,



round the base, and fourteen charges of gunpowder inserted. These charges were fired at 2:30 p. m. Nine charges exploded without any apparent damage to the stability of the chimney, but the report of the tenth had no sooner been heard than the chimney was seen to be rent from top to bottom, and the huge mass disintegrated from the base upward. The chimney fell very nearly within the circumference of its own base. No accident occurred.

We understand that a steel chimney, 350 feet high, is now being constructed at the Chicago Exhibition.

#### Sugar Crystals.

A correspondent asks the editor of the *Louisiana Planter*: "Does a grain of sugar contain any impurity in itself? It appears to me that sugar in crystallizing would repel all foreign matters." To which the editor replies as follows:

"A grain of sugar is rather an indefinite term. Sugar may crystallize in large crystals or small, and seemingly large crystals of sugar are frequently an agglomeration of smaller crystals, in the interstices between which impurities may be retained. Further, a thin film of impurity, ordinarily containing colored matter, surrounds each crystal of ordinary sugar, and if it were possible to remove this coloring matter, such crystals would be transparent. The largest single crystals of sugar known are made by the rock candy process, and such crystals are comparatively transparent.

We may, therefore, say that our correspondent is correct in believing that sugar in crystallizing would repel all foreign matter, but that practically sugar does not crystallize into individual crystals, but into agglomerations of crystals, which may, and ordinarily do, engage considerable foreign matter with them."

#### THE BOHEMIAN TWINS.

The twin sisters, Rosa and Josepha, who were lately exhibited in Vienna, excited the interest, not only of scientists, but also of the lay public, on account of the union of their bodies. They were born in Skreychow, Bohemia, and are now fifteen years old. Their parents, simple people named Blazel, gave them up to the French impresario Forbé, who first brought them before the public in Paris, at the "Theatre Imperial de la Gaité," and is now taking them on a tour through Europe.

Rosa and Josepha, of whom we publish an engraving, are not well grown for their age, but are delicate and frail. Their complexions and hair are dark, and their faces, which are very much alike, show no traces of their nationality. As will be seen from the cut, the first impression is that they are two perfectly formed individuals with a connection at the hips, but an investigation proves that this is not the case; for, although the upper parts of their bodies are separate, the backbones grow together in the region of the coccyx, and there is only one pelvis; strangely enough, however, there are four legs instead of two. Therefore, we have not two complete beings that have grown together, but two half female bodies, so to speak, that are normally developed only as far as the hips. Under the circumstances a separation by means of a surgical operation was impossible. When one half of this unfortunate double creature dies, the other sister must soon meet the same fate.—*Illustrirte Zeitung*.


#### Prize for Red Cross Improvements.

The King and Queen of Italy, as is well known, have been interested for many years in all improvements for the care of the sick and wounded. They have now offered a prize of 10,000 lire, or \$2,500, for the best apparatus for carrying the wounded and sick to places where they may be cared for. The offer is a result of the recent meeting of the Society of the Red Cross in Rome. Inventors of all countries are invited to enter the competition for the prize. Models, not less than one-fourth the size of the originals, must be sent to Rome, in care of Signor L. delli Sanaglia, not later than June 30, 1893. The models must be accompanied by detailed descriptions in French or Italian, or translations into one of those tongues. An exhibition of the apparatuses will be held in Rome from August 11 to September 15. A jury, consisting of fourteen representatives of the countries which took part in the congress of the Red Cross, will award the prize.

EXPERIENCE in electrically welding shows the metal is strengthened at the point of welding.

#### AN IMPROVED AUTOMATIC BOILER FEED.

The feed regulating valve shown in the illustration, and which has been patented by Mr. William K. Farrand, is positive in operation, not liable to get out of repair, and operates automatically to preserve the exact correct height of water in the boiler. The water column is for convenience made in two parts, a nipple at the top connecting with the steam space of the boiler and one at the bottom with the water space, so that the water will always be at the same height in the column as in the boiler, and will be thus indicated on the water gauge. In an extension at one side of the

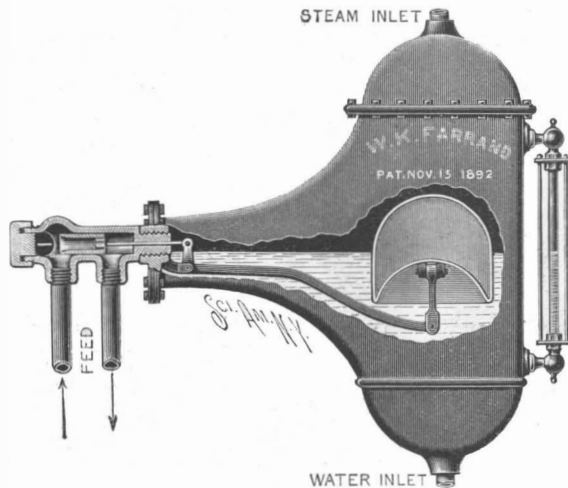

FARRAND'S FEED REGULATING VALVE.

water column screws the stem of a valve casing, in which is a water inlet and a water outlet, as shown by the arrows, there being at the outer end of the casing a removable cap, on the inner surface of which is secured a semispherical seat, preferably of rubber. Opposite this seat is a cylindrical valve, fitting snugly in the casing and adapted to move horizontally, the valve being beveled on its inner edge to fit smoothly and tightly upon the seat. The valve is open at both ends, and its stem extends through the stem of the casing to a pivotal connection with one arm of a bell crank lever fulcrumed at its elbow on a suitable support, the other long bent arm of the lever having a float secured to its free end. The float has a chamber in its bottom, designed to create an excessive suction, so that, should the valve stick as the water in the column dropped, the suction created by reason of the chamber would cause the float to be pulled down with force to start the valve from its seat. This valve may be used for regulating the supply of water in receptacles other than boilers.

Further information relative to this improvement may be obtained by addressing Mrs. Elizabeth Riley, No. 452 Classon Avenue, Brooklyn, N. Y.



THE BOHEMIAN TWINS.

#### The Old Saugus Iron Works.

An old fashioned iron pot, said to be the first iron casting made in America, in 1642, was lately presented to the city of Lynn, Mass., on which occasion C. J. H. Woodbury, of Boston, delivered an address on the Saugus Iron Works, where the casting was made.

The Saugus Iron Works were an important factor in the inception and early development of American industries.

The site of the works was situated at the head of navigation, by the ford in the highway from Boston to Salem, at a water power, and near to the bog iron ore deposits, whose exact location is unknown, save that they were in Adam Hawkes' meadows. The whole iron works tract probably covered 3,000 acres.

The works contained a blast furnace, in which bog iron ore was reduced by means of charcoal, using as a flux lime, which in the earliest days of the works was obtained from the oyster shells which then abounded on the coast of Massachusetts Bay. Cannon were also melted at this foundry, far in advance of the time when swords were to be beaten into plowshares or spears into pruning hooks.

The iron from the blast furnace was run into straight trenches in the sand, and thereby cast into long triangular bars called "sowe iron," which were converted into wrought iron and steel. Castings were made directly from the metal flowing from the blast furnace into a pool, whence it was dipped by crucibles and poured into the moulds. The cupola furnace was not invented until 1790.

The wrought iron and steel were made in a blomary, which may be described as a charcoal fire four feet thick in a blacksmith's forge. The end of a bar of sow iron was plunged into the fire, and in time a pasty mass of wrought iron would settle to the bottom. Other portions of the bar would be converted into steel when the process stopped at the intermediary stage between cast and wrought iron. This process of steel making is still used throughout the Oriental nations, and also in the mountainous region south of the Ohio River.

The iron works also included a machine shop, in which the first fire engines made in America were built for the town of Boston, in accordance with a vote of the town meeting, March 1, 1654.

When Governor John Endicott began the oak tree and pine tree coinage, in 1652, the dies were made by Joseph Jenks at the Saugus Iron Works.

It is stated by Judge James R. Newhall that the designs were made by Elizabeth, the wife of Joseph Jenks, the master mechanic.

Joseph Jenks also invented a sawmill, which received a patent for fourteen years from the General Court, on June 10, 1646, being the first patent granted in America, and also a water engine for mills, which was undoubtedly a form of water wheel, and not the hydraulic engine which that term would now signify.

He also invented the modern American scythe, long and narrow, and stiffened by a ridge along the back, a marked improvement "for the more speedie cutting of grasse" over the broad, short bushwack scythe made from a thin plate of steel, and richly deserved the patent for seven years which was granted by the General Court, May 23, 1655.

In 1667 he petitioned the General Court relative to a wire manufactory, and May 15, 1672, his petition for authority to coin money was refused.

The works are not known to have been in operation after 1688, when the tract had diminished to 600 acres and passed into individual ownership.

#### The Stimson Institute, New York.

The institute was founded four years ago to provide American labor with the facilities for acquiring skill and taste in design. In four years over four hundred students have been educated.

At present the teaching force consists of twelve specialists, in charge of Mr. Stimson, and a numerous and enthusiastic body of pupils drawn from all parts of the United States is in attendance. The range of instruction embraces architecture, sculpture, painting, and drawing in all their forms, book illustration and covering, wood carving, wall paper designing and mural decoration; silk, calico, cretonne, and carpet designing; ceramic, tile, and porcelain work; meta and jewelry designing, with other ornamental domestic arts where now we are obliged to employ foreign skill if we require first-class work. What is immediately needed to put this institute on a sure foundation is practical support by men who appreciate what is being done abroad and what must be done at home in the line of the technical education of the artisan.



NATURAL RESOURCES OF VIRGINIA AND WEST VIRGINIA.


(Continued from first page.)

plain view of the railroad. About 10,000 tons of fine salt are shipped annually, and it is proposed to enlarge the works and double the production at an early date. The brine from these salt wells is stronger in saline matter than from any other salt well in this country.

The comparative table of population of some of the more important of these towns during the past ten years which we publish in this issue will show how marked has been the progress made, Roanoke, Virginia, and Huntington, West Virginia, showing the largest percentage of gain. The former is one of the solid cities of the new South, and while the location of the shops of the Norfolk and Western system gave it its start, the many large industrial concerns that have since located at this point give evidence of the solid growth of the place. We give a view of Crystal Spring Park, which is located in Roanoke. This is delightfully situated, and derives its name from the famous spring from which the city receives its water supply, and it gushes in apparently inexhaustible supply from the limestone mountain near the city.

Both Virginia and West Virginia are rich in minerals of all kinds, particularly in coal and iron, and the mines in the Pocahontas region of West Virginia, which produce a superior kind of steam coal, are noted, and it has become necessary to double track the railroad to Lambert's Point, Norfolk, to bring this coal to tide water.

The foreign and coastwise commerce of these States has grown very rapidly, and on one page we show the three great shipping points for the three trunkline roads that reach the Atlantic. Newport News, the outlet for the Chesapeake and Ohio, has increased very rapidly, as it was not incorporated in 1880. Here is located the large shipbuilding establishment, which is one of the most complete in this country, and from this port

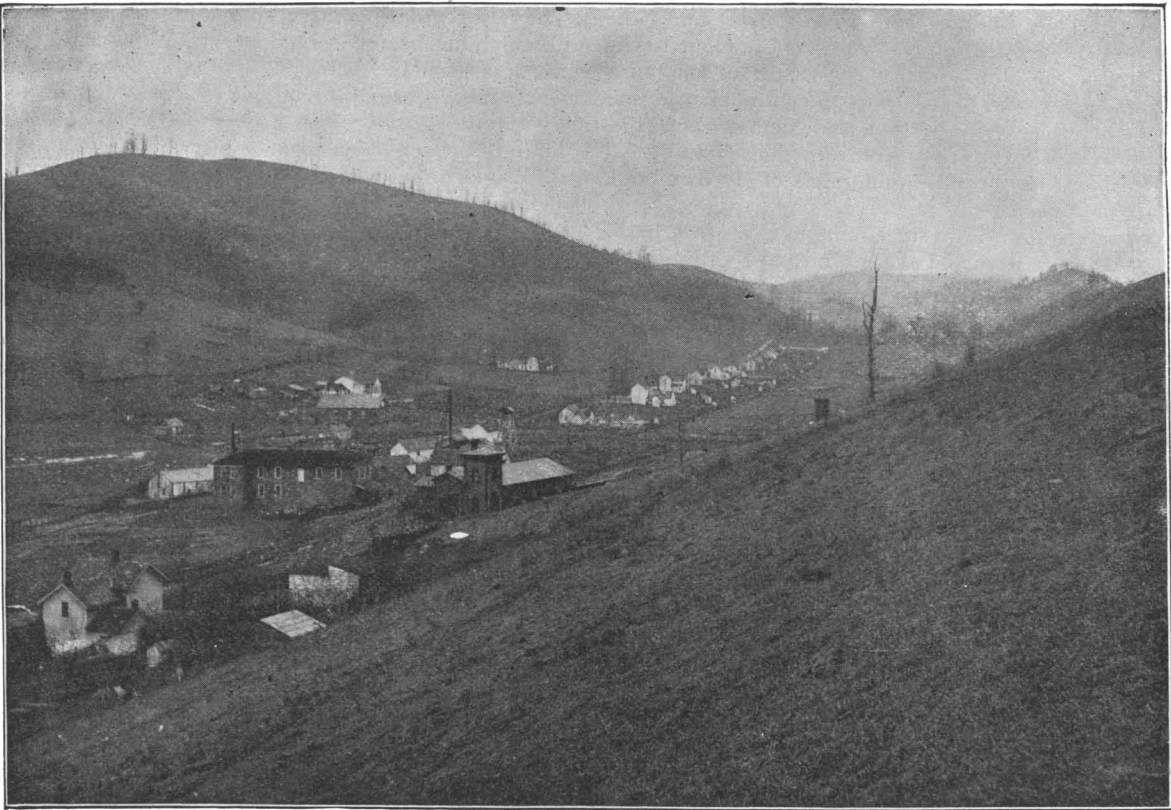

SALTVILLE, VA.—NORFOLK AND WESTERN RAILROAD.

published elsewhere, increased from 557 in 1880 to 2,018 in 1890.

Lambert's Point, which is the outlet of the Norfolk and Western Railroad, has grown very rapidly, and during the year 1891 handled almost 1,700,000 tons of

the rapid development of the many industrial towns which have so recently come into existence.

POPULATION OF INDUSTRIAL TOWNS AND CITIES IN VIRGINIA AND WEST VIRGINIA FOR 1880 AND 1890.

Virginia.

| Cities and Towns.    | Population. |           | Gain in Percentage. |
|----------------------|-------------|-----------|---------------------|
|                      | 1890.       | 1880.     |                     |
| Richmond.....        | 81,388      | 63,600    | 27.97               |
| Norfolk.....         | 34,871      | 21,966    | 58.75               |
| Lynchburg.....       | 19,709      | 15,959    | 23.50               |
| Roanoke.....         | 16,159      | 669       | 2,315.40            |
| Danville.....        | 10,305      | 7,256     | 36.93               |
| Manchester.....      | 9,246       | 5,729     | 61.39               |
| Charlottesville..... | 5,591       | 2,676     | 108.93              |
| Newport News.....    | 4,449       | .....     | .....               |
| Berkeley.....        | 3,899       | .....     | .....               |
| North Danville.....  | 3,799       | 1,200     | 266.58              |
| Suffolk.....         | 3,354       | 1,963     | 70.86               |
| Salem.....           | 3,279       | 1,759     | 86.41               |
| Pocahontas.....      | 2,953       | .....     | .....               |
| Bristol.....         | 2,902       | 1,562     | 85.79               |
| Luray.....           | 2,809       | 632       | 344.46              |
| Wytheville.....      | 2,570       | 1,885     | 36.34               |
| Pulaski.....         | 2,112       | .....     | .....               |
| Radford.....         | 2,060       | .....     | .....               |
| West Point.....      | 2,018       | 557       | 262.30              |
| Total for State..... | 1,655,980   | 1,512,565 | 9.48                |

West Virginia.


| Cities and Towns.       | Population. |         | Gain in Percentage. |
|-------------------------|-------------|---------|---------------------|
|                         | 1890.       | 1880.   |                     |
| Wheeling.....           | 34,522      | 30,737  | 12.31               |
| Huntington.....         | 10,108      | 3,174   | 218.46              |
| Parkersburg.....        | 8,408       | 6,582   | 27.74               |
| Charleston.....         | 6,742       | 4,192   | 60.83               |
| Benwood.....            | 2,934       | .....   | .....               |
| Moundsville.....        | 2,688       | 1,774   | 51.52               |
| Hinton.....             | 2,570       | 879     | 192.38              |
| New Cumberlandtown..... | 2,305       | 1,218   | 89.24               |
| Total for State.....    | 762,794     | 618,457 | 23.34               |

it is proposed to run a new steamship line, consisting of six first-class vessels, to Liverpool.


West Point is the outlet for the Richmond and Danville Railroad and is one of the largest cotton shipping ports in this section, standing second to Norfolk. The population of this place, as will be seen from the table

freight, or about 30 per cent of all carried by this road. Virginia and West Virginia are fortunate in having railroads within their borders with such liberal ideas, and to the Baltimore and Ohio, Chesapeake and Ohio, Richmond and Danville, and Norfolk and Western, is due the marked advance made by these States and

The shipments of coal and coke transported over the Norfolk and Western Railroad since the completion

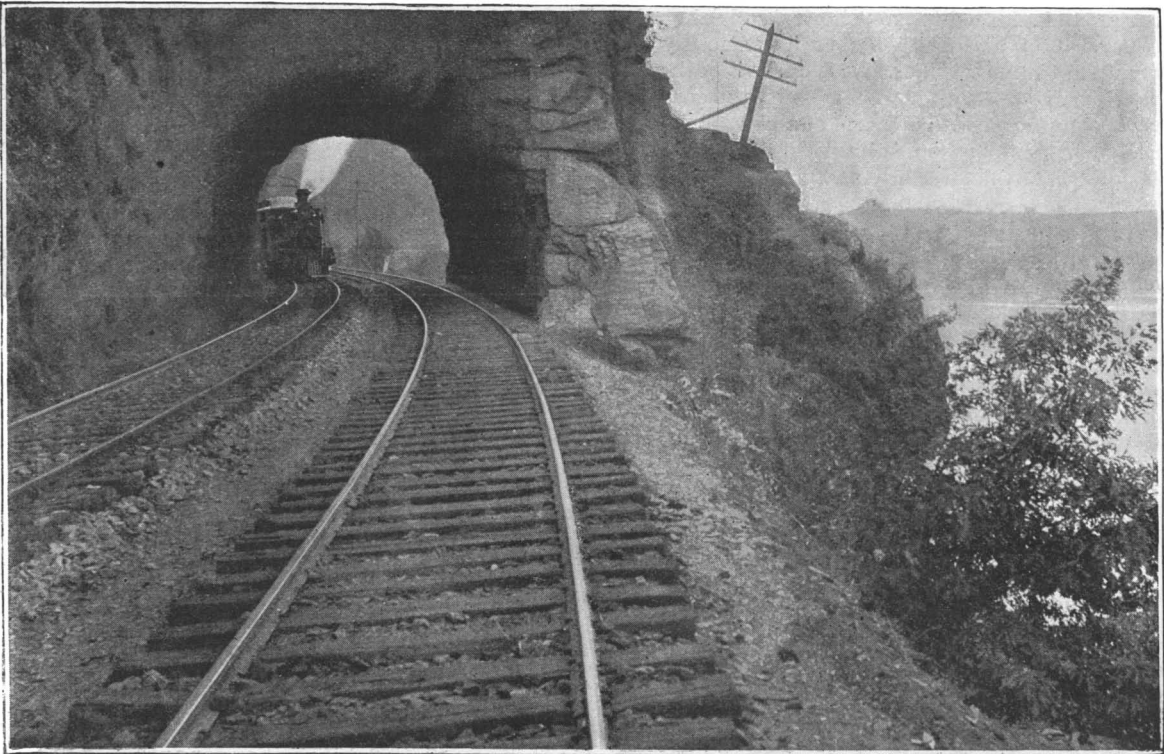

ABOVE HARPER'S FERRY—BALTIMORE AND OHIO RAILROAD.

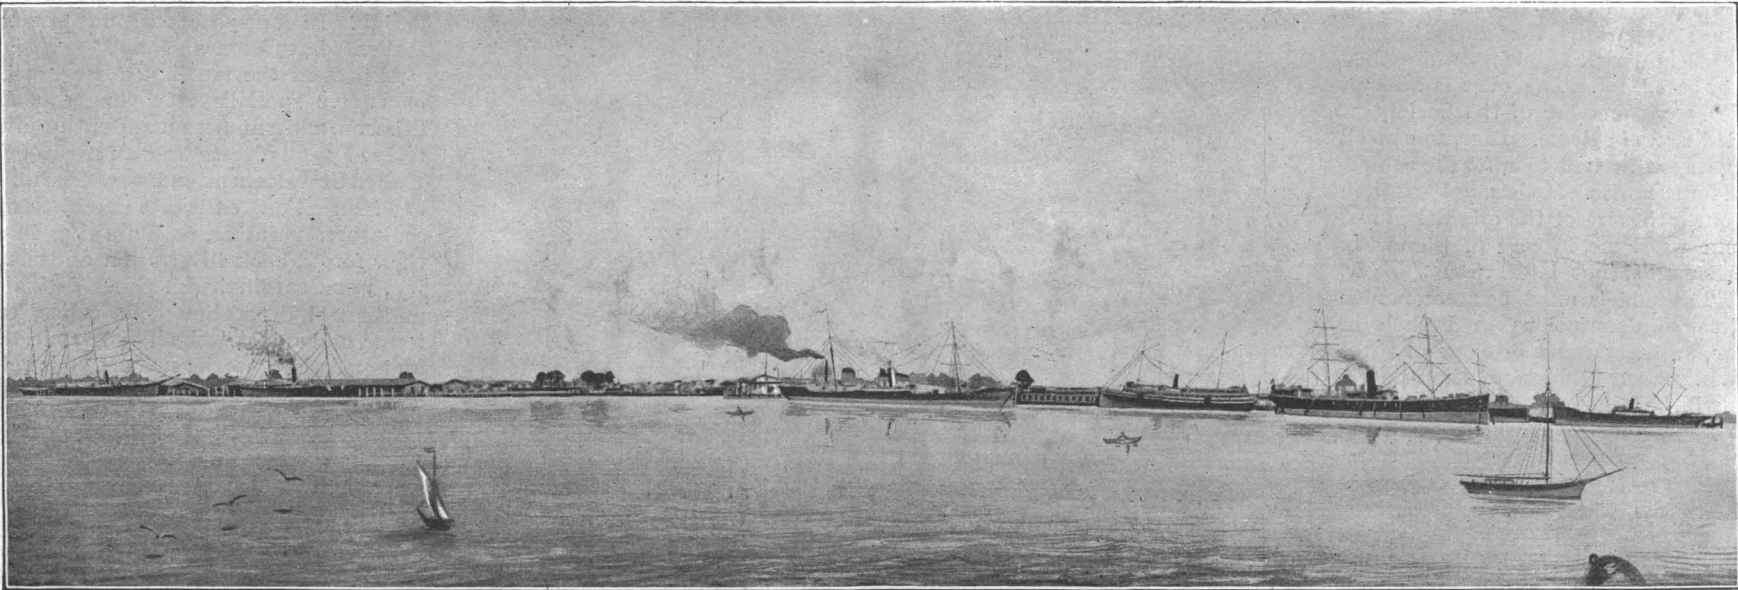

WEST POINT, VA.—SHIPPING PIERS OF RICHMOND AND DANVILLE RAILROAD.



of their New River Division to the Pocahontas Flat. Top coal fields have been as follows:

|                            | Coal.<br>Net Tons. | Coke.<br>Net Tons. |
|----------------------------|--------------------|--------------------|
| 1882.....                  | 4,735              | .....              |
| 1883.....                  | 32,043             | 23,762             |
| 1884.....                  | 215,818            | 56,360             |
| 1885.....                  | 603,416            | 48,571             |
| 1886.....                  | 870,614            | 59,021             |
| 1887.....                  | 1,157,423          | 151,171            |
| 1888.....                  | 1,587,983          | 202,808            |
| 1889.....                  | 1,813,745          | 310,504            |
| 1890.....                  | 2,044,567          | 433,319            |
| 1891.....                  | 2,341,226          | 466,016            |
| 1892 partly estimated..... | 2,950,000          | 550,000            |

The shipments at the present time are far behind the orders, owing to scarcity of transportation facilities.

West Virginia has more square miles of coal than Great Britain, Germany and France combined, and though her development career has just begun, she stands fifth in point of coal production in the United States. A table of the output for the years 1888, 1889 and 1890 is given herewith:

| District.                    | Tons 1888. | Tons 1889. | Tons 1890. |
|------------------------------|------------|------------|------------|
| From Elk Garden.....         | 564,397    | 576,047    | 774,904    |
| From Kanawha, per C. & O.... | 1,000,000  | 1,700,000  | 2,000,000  |
| From Kanawha, by water. ...  | 1,350,000  | 1,200,000  | 1,250,000  |
| From line of B. & O. road... | 650,000    | 750,000    | 900,000    |
| From other sources.....      | 500,000    | 500,000    | 500,000    |

Making a total product for years named:

|           |                 |
|-----------|-----------------|
| 1888..... | 4,700,000 tons. |
| 1889..... | 4,726,000 tons. |
| 1890..... | 5,424,904 tons. |

We also publish a view of Danville on the Dan River, on Richmond and Danville Railroad. This place is growing rapidly and many factories are being located at this point.

Radford, Va., on the line of the Norfolk and Western Railroad, is also illustrated. It is delightfully situated on New River, as shown in the cut, and is growing very rapidly, having more than doubled in population since the census of 1890 was taken.

The view of the Shenandoah Valley which we give was taken from the Baltimore and Ohio Railroad, and is the best farming region of these States.

At the Bertha Zinc Works, Pulaski, Va., zinc of the best quality is made, and it is used at the United States mint in Philadelphia, and is there regarded as the standard.


The only views we have given in the vicinity of Norfolk are of Newport News and Lambert's Point, which are the outlets of the trunk lines that bring coal and iron to tide water.

We are unable to give the production of these States for 1890, as the Census Office has not yet completed the tables, but enough is known to show that they will take their place among the great manufacturing sections of the country, and for beautiful and diversified scenery they stand to-day unrivaled.

Brick Pavements.


There were put down last fall nine and three-quarter miles of vitrified brick pavements in Evansville, Ind. The brick used was from New Cumberland, W. Va., and the foundation was of broken stone, with only one layer of brick. Brick pavements have been used for years in Evansville, and also Decatur, Ill., and have given the greatest satisfaction. In Decatur one pavement has been down for several years,

is practically as smooth as asphalt, and will retain an even surface, which no other pavement does so satisfactorily as brick. It is easily repaired, and when it is necessary to take it up for the purpose of tapping or repairing sewers, water or gas pipes, or for any other purpose, the work can be done by ordinary workmen, while a limited number only of skilled and high-priced workmen can repair asphalt pavement, and only, moreover, in certain kinds of weather. It

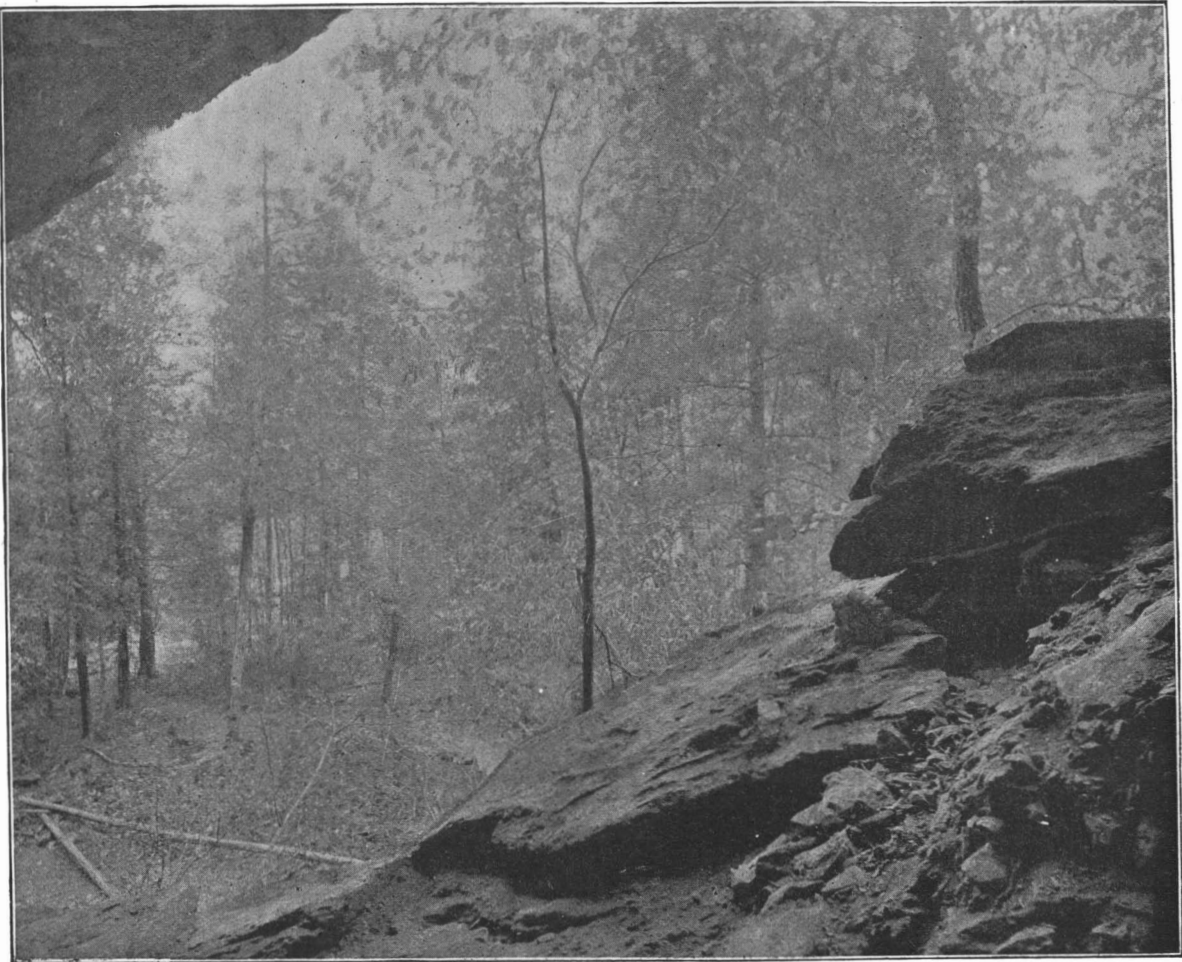

SALTPETER CAVE, NEAR NATURAL BRIDGE, VA.

and no repairs have been necessary yet, and the general assumption is that the pavement will remain in good condition for at least twenty years yet. There can be no doubt that the coming pavement is to be constructed of vitrified brick. It is the nearest approach to the ideal pavement for city streets. It is not so dusty as asphalt, which, in this respect, is highly objectionable. Brick pavement, too, has been truly said that "the best pavement is the one most easily repaired." The necessary repairs to water and gas pipes alone should convince every one of this fact. Cities can construct and maintain a vitrified brick pavement at less cost than any other kind of material. The life of this pavement has been put at twelve years, but twenty-five years represents more truly its average lasting capacity.—*Clay Record*.

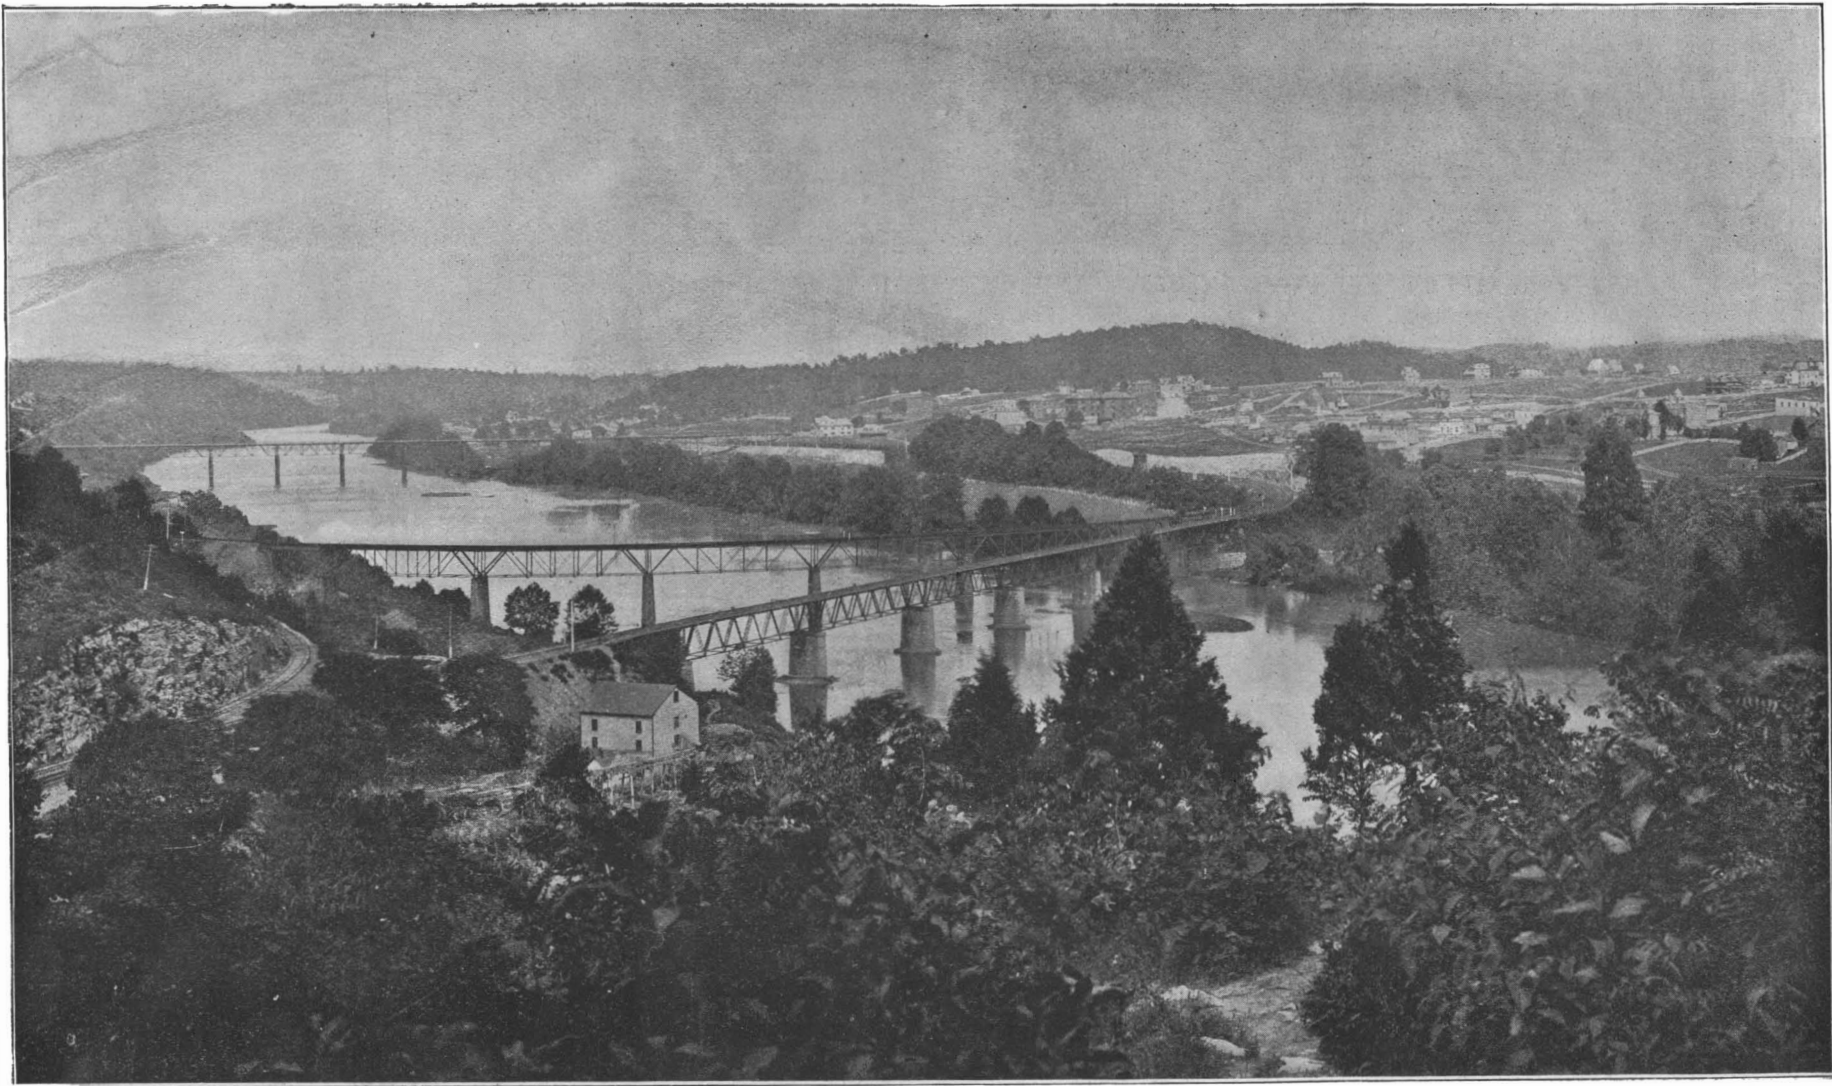

RADFORD, VA., ON NORFOLK AND WESTERN RAILROAD.



**The Atlantic Steamers.**

The development of the machinery of Atlantic liners was the subject which Mr. Arthur J. Maginnis, M.I.N.A., the well known engineer and surveyor, Liverpool, had for a most interesting and valuable paper which he read before the Liverpool Engineering Society,

Commencing with side lever engines for paddlewheel vessels, the various types of machinery of this class were described, followed by descriptions of screw-propelling machinery, in the various forms of beam, steeple, oscillating, and other geared screw engines, also various types of direct-acting engines, and the evolu-

in 1840, the machinery alone would nearly equal the whole of the displacement of the vessel, as it would reach 18,750 tons, and would require a consumption of something like 1,500 tons per twenty-four hours.

But while he was able to point out the great improvements that had been made on the marine engine,




ROANOKE, VA.—VIEW IN CRYSTAL SPRING PARK.

on the 9th of November. The *Steamship* gives a summary, from which we derive the following:

Mr. Maginnis pointed out the gradual development in the horse power, displacement, and speed of various representative vessels, from the Savannah in 1819 to the coming Cunarder Campania, which was estimated to represent 20,000 tons displacement propelled 22 knots with 1.5 indicated horse power to the displacement ton.


tion to compound and triple-expansion engines. He also pointed out the gradual saving which had been effected in the weight of the engines per horse power, as well as the saving in the consumption of fuel. As showing the difference in the weight of the machinery nowadays as compared with fifty years ago, the author instanced the striking fact that if the 30,000 horse power engines of the Campania were to be built the weights possible

the author was unable to allude to any great change or advancement in the efficiency of the boiler. That the marine boiler is at a standstill, as it were, in the matter of efficiency, has long been matter for surprise, and it is to be hoped that it may now receive a little more attention than in the past. The pressing need of improvement was commented upon to reduce the weight and space occupied on board ship, and it was noticed

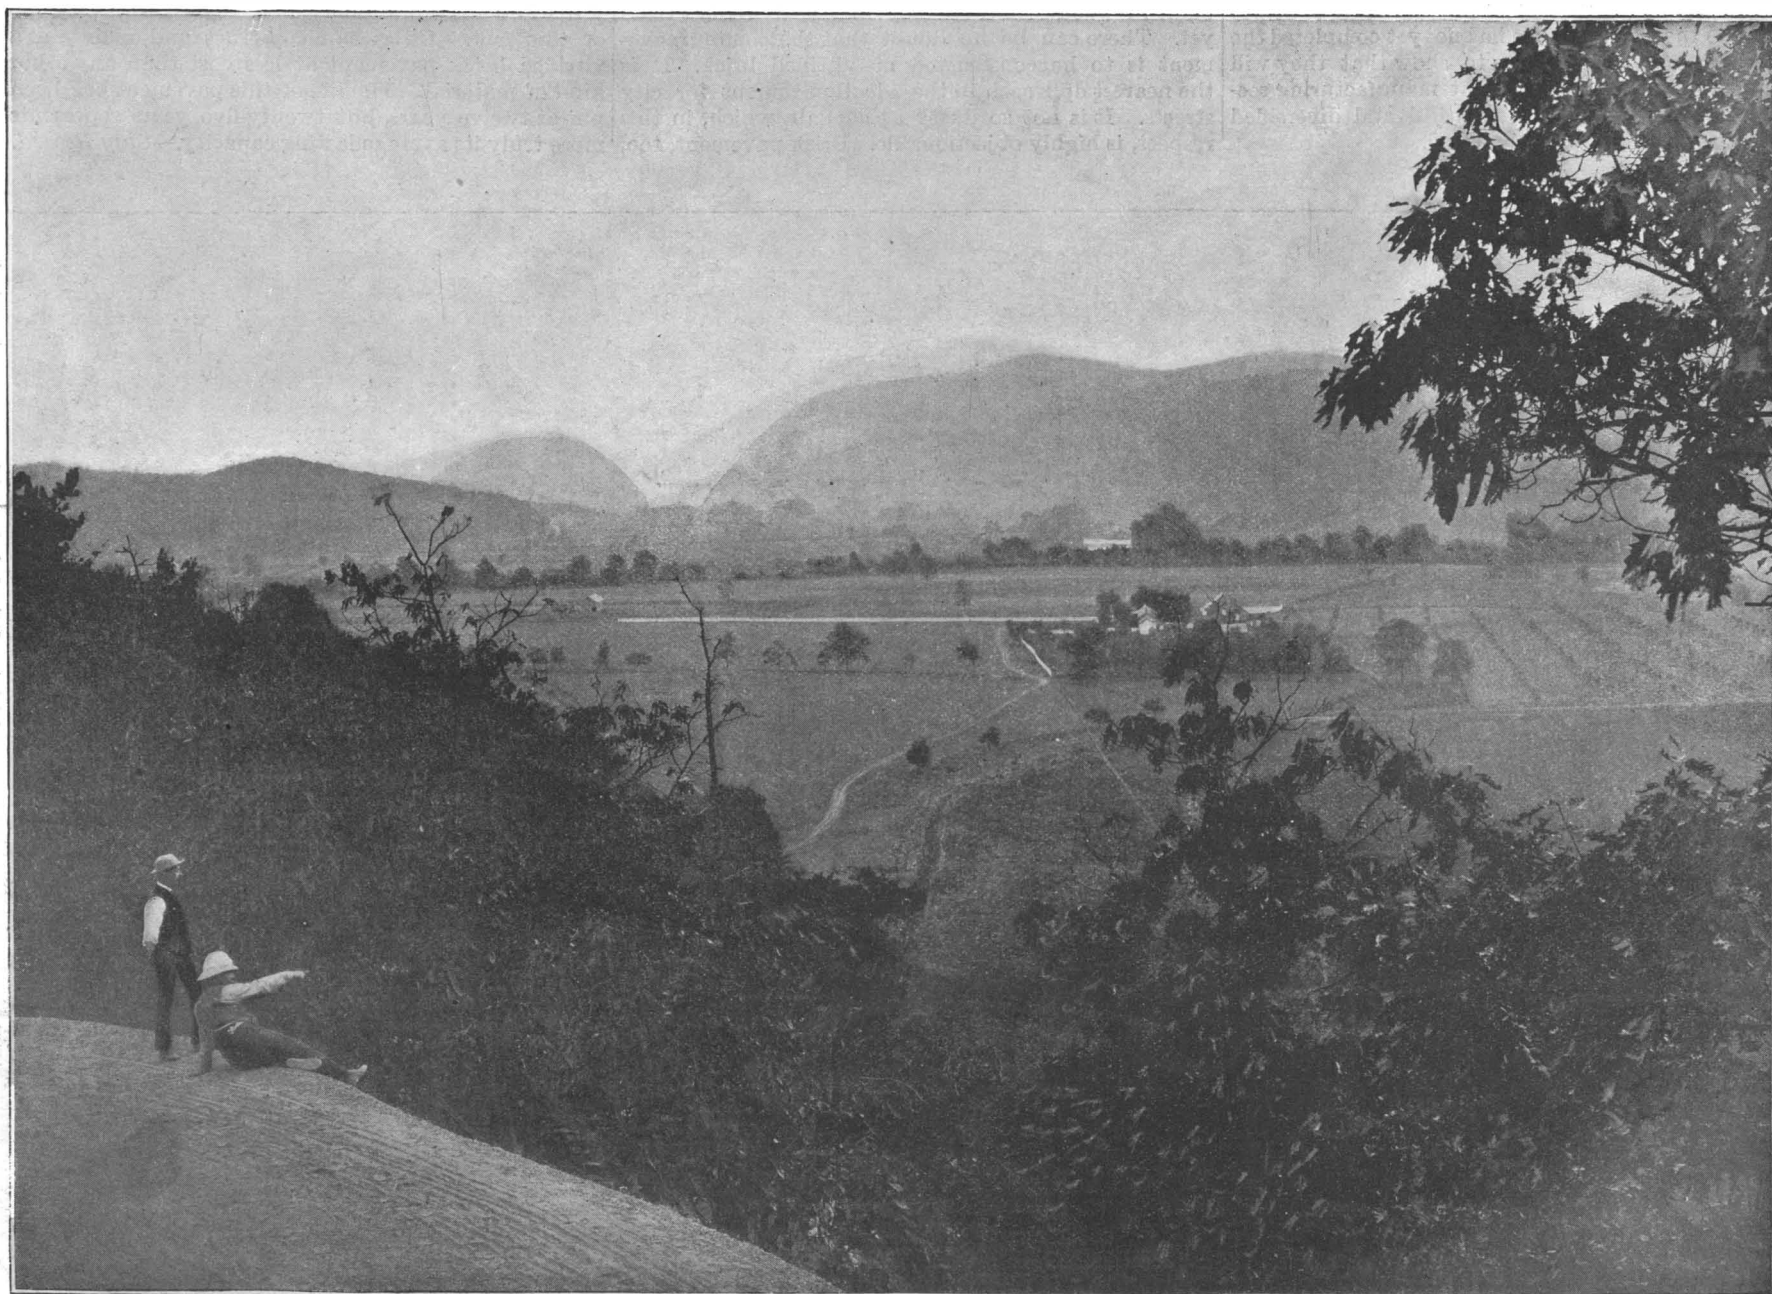

VIEW OF SHENANDOAH VALLEY, VIRGINIA, FROM BALTIMORE AND OHIO RAILROAD.



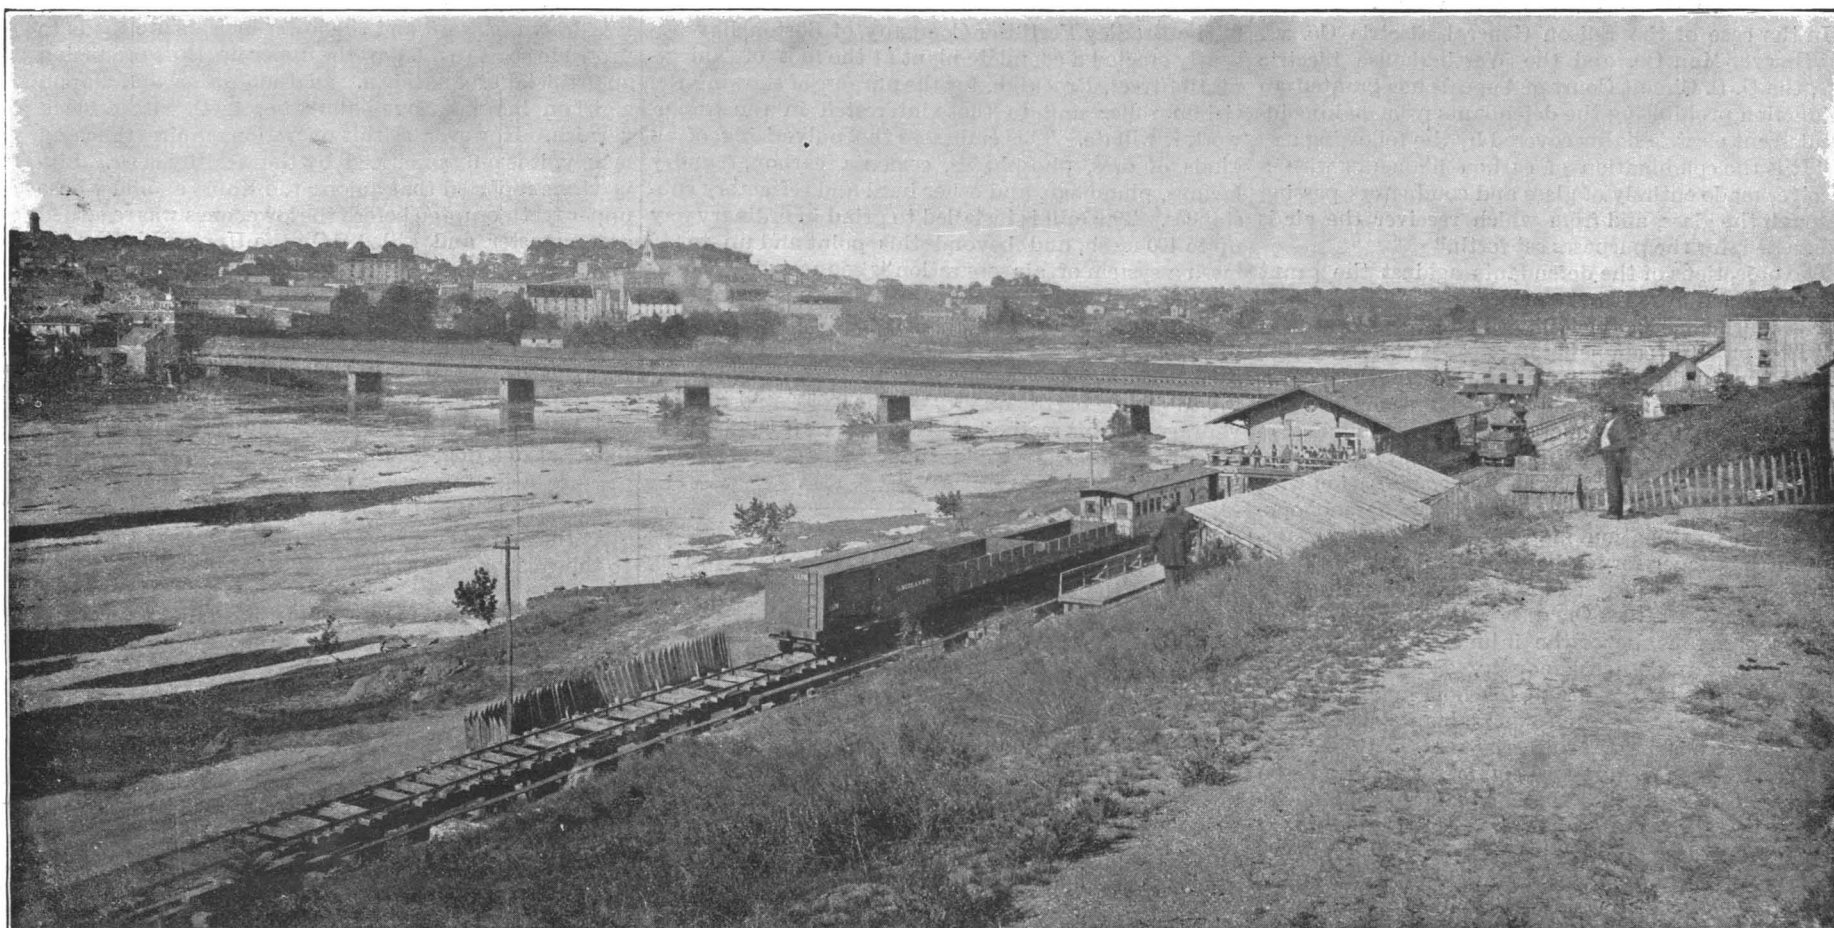

DAN RIVER BRIDGE DANVILLE VA., ON RICHMOND AND DANVILLE RAILROAD.

that of all the various forms used, marine engineers looked to the locomotive type as coming nearest to meet their requirements in the future. With the improvements in the feed and general working of boilers which have taken place, the author considers that the successful working of this class of boiler is now within measurable distance; and he says it now "only remains for an enterprising Atlantic line and engineering firm to take the step and test it under the favorable conditions now existing." That the step is well worth considering might be seen from the comparison drawn by Mr. F. C. Marshall, in a paper read before the Institution of Naval Architects, in 1888, which, among other war vessels, gave two of exactly equal indicated horse power, one with modified locomotive and the other with naval boilers, the weights with water being in the former 49 pounds per indicated horse power and 74 pounds in the latter, so that the locomotive boiler effects a saving in weight of 33 per cent. This, in the weight given for the new *Campania*—viz., 1,200 tons—would mean a gain of 400 tons in earning weight.

There is a very pleasing feature in connection with the Atlantic traffic which Mr. Maginnis takes special note of toward the end of his paper, and that is the great immunity from breakdown of machinery which at present characterizes the vessels engaged on the Atlantic ferry. Although the voyage "is admittedly the wildest and most trying in the world," the author


says that, taking the year ending 1st October last, out of a total of nearly 4,000 departures from port, or an average of 74 per week, he had only been able to trace seven breakdowns of machinery which caused serious delay, and only three total disablements. That there should

although redounding to the credit of both builders and owners in proving that the best designs, materials, and workmanship have been utilized, it would be idle to deny that were it not for the care and attention taken and given by the engineers in charge at sea—the men who bear the heat and brunt of the day, from the chief downward—the result would not be so satisfactory nor the advances which have been made become practicable.


#### Lanoline.

Wool fat contains wax-like substances, which are produced by the splitting up of the cholesterin, isocholesterin, and higher alcohols. This wax detracts from the medicinal fitness of wool fat, and Dr. Benno Jaffe and Dr. Ludwig Darmstadter have devised a process for effecting an improvement. This process consists in dissolving the wool fat in benzol, toluol, ether, chloroform, or other suitable solvent, several of which are named, and adding to the solution ethyl or methyl alcohol, which has the effect of throwing out the wool wax proportionately to the amount added. An alternative method is to dissolve the crude fat at its melting point in fusel oil, and it is found, on cooling, that the wool wax crystallizes out. The result in either

case is that the purified fat is much improved, especially in consistency, and it makes "an excellent lanoline" on further treatment by the applicants' well-known process.

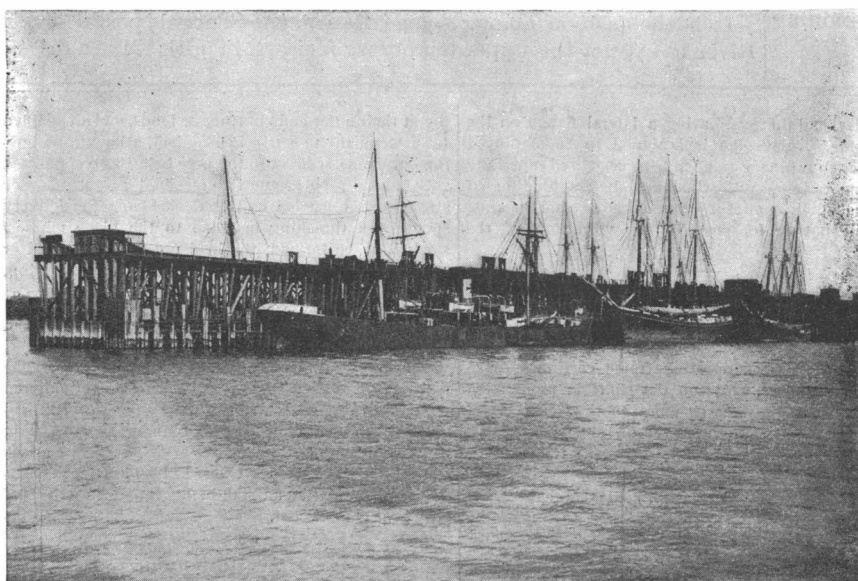

NEWPORT NEWS VA.—SHIPPING WHARVES CHESAPEAKE AND OHIO RAILROAD.

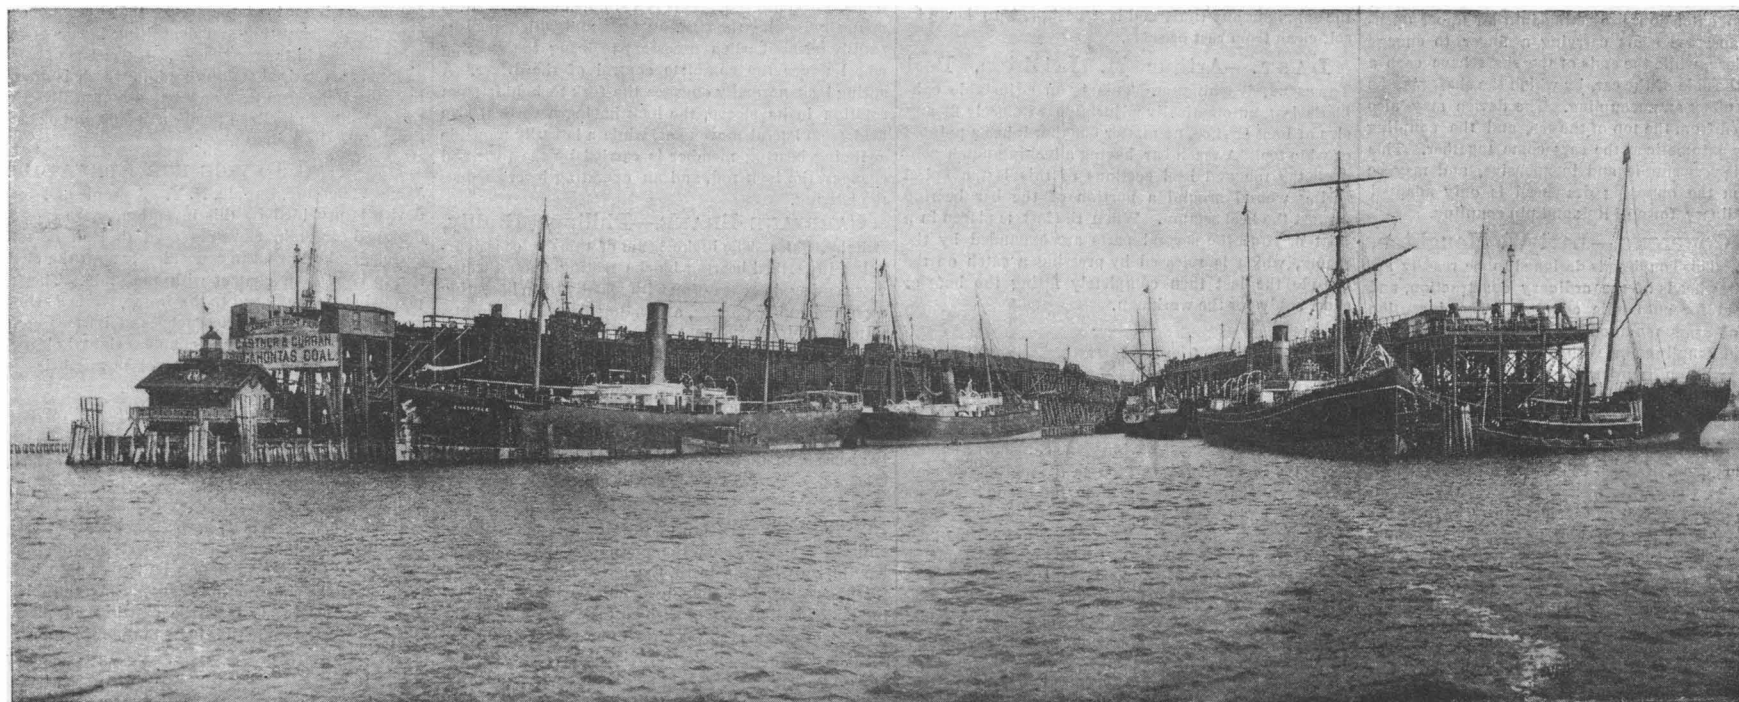

LAMBERT'S POINT NORFOLK, VA.—SHIPPING WHARVES OF NORFOLK AND WESTERN RAILROAD.



**The Great Electric Light Suit.**

In the case of the Edison General Electric Co. vs. the Sawyer-Man Co. and the Westinghouse Electric Co., the U. S. Circuit Court of Appeals has granted an injunction prohibiting the defendants from making incandescent electric lights covered by the following:

"It is the combination of carbon filaments with a receiver made entirely of glass and conductors passing through the glass, and from which receiver the air is exhausted, for the purposes set forth."

The objections of the defendants against the grant of the injunction were overruled.

The court, among other things, holds as follows:

"The present complainants are entitled by the patent laws to a monopoly for the term of the patent of the manufacture and sale of the lamps made under it. The right to this monopoly is the very foundation of the patent system. They do not lose that right merely because they may have joined in a combination with others holding other patents securing similar monopolies, which combination may, when judicially examined in the proper forum, be held to be unlawful."

"We do not feel justified in assuming upon the facts in the present suit that the use which the complainants propose to make of the injunction will be such as to promote any other monopoly. When it shall be made to appear that some one, to whom in fairness and good conscience these same complainants should sell their lamps, has been arbitrarily refused them, save upon oppressive and unreasonable terms, it will be time to consider whether the complainants should be allowed to continue in possession of the injunction."

"The injunction order appealed from should be modified so as to cover only lamps made in infringement of the second claim of the patent, the other claims not having been infringed according to the adjudication of the circuit court or of this court. It should also contain a provision reserving the right to the defendant to move hereafter for the vacation, suspension, or modification of the injunction upon proof of specific instances of refusal upon the part of the complainants, or either of them, to supply the lamps of the patent upon terms reasonable under the circumstances of the particular case to the owners of electric light plants which were installed before the rendition of the interlocutory decree of the circuit court sustaining the validity of the patent."

**A Pulverizing Mill Plant in Brooklyn, N. Y.**

The Bradley Fertilizer Company, of Boston, have recently erected a complete plant at the foot of Thirtieth Street, Brooklyn, for the purpose of showing the Griffin roller mill to those interested in the kind of work it will do. This embraces the pulverizing of all kinds of ores, phosphates, cements, carbon, foundry facings, plumbago, and other hard and refractory substances. The mill is installed to grind in ordinary way up to 100 mesh, and beyond this point and up to 250 mesh a system of air separation is connected, thus exhibiting a plant in actual operation with a range from 30 to 250 mesh, the product of the mill being delivered, finished, and of any mesh desired. The company express a willingness to grind samples for any one desiring to judge of the quality of the work and the advantages of this method of grinding. A full illustrated description of the Griffin roller mill appeared in the SCIENTIFIC AMERICAN of August 6, 1892.

**Teeth Mutilation.**

Dr. Magitot, of Paris, has published an interesting account of the mutilation of the teeth practiced by various savage tribes. One variety, which is chiefly met with on the coasts of Africa and the west coast of New Guinea, consists of the breaking of a portion of the incisor by means of a knife and a piece of wood, and is performed between the ages of twenty and twenty-five. The custom of extracting the two central incisors is found in both hemispheres. According to Zerate, it has been practiced in Peru from time immemorial, where it is inflicted on conquered tribes as a sign of slavery. In Africa it has been observed on the Congo, among the Hottentots and the Batoxas. The mutilation by filing has for its exclusive center the Malayan Archipelago, whence it has spread to the adjoining islands. It is a religious act, which is celebrated with great festivities at the age of puberty, but this only by the Mohammedans. The degree and character of this filing vary with the habits of the family or caste. The operation is performed by an expert, the *Tukang pangur* (filer), by means of a chisel, three bricks, two files, a small saw, and a pair of cutting nippers, the instruments being rubbed with arsenic and lemon juice before being used.

It is the fashion among some tribes on the Senegal River to extract the upper temporary incisors in girls

when quite young and to manipulate the chin, so that it is drawn forward and the lower incisors are made to protrude so as to overlap the upper lip, thus producing an artificial prognathism. In Indo-China and Japan a girl on her marriage paints her teeth with a black varnish. However, as this operation requires time and money, it is only practiced by the wealthy class. Livingstone reported that among the Kafirs a child whose upper teeth erupted before the lower ones was regarded as a monster and killed. On the Upper Nile the negroes have their upper incisors extracted, in order to avoid being sold as slaves, because of the loss of value brought about by this mutilation. Among the Esquimaux, as described by the Abbe Peritat, in some regions there exists a custom of transversely cutting off the upper incisors, the object of this being, according to local tradition, to prevent the human chin looking like that of a dog.—*Lancet*.

**A Word to Mail Subscribers.**

At the end of every year a great many subscriptions to the various SCIENTIFIC AMERICAN publications expire.

The bills for 1893 for the SCIENTIFIC AMERICAN, the SCIENTIFIC AMERICAN SUPPLEMENT, and the ARCHITECT'S AND BUILDER'S EDITION of the SCIENTIFIC AMERICAN are now being mailed to those whose subscriptions come to an end with the year. Responding promptly to the invitation to renew saves removing the name from our subscription books, and secures without interruption the reception of the paper by the subscriber.

**PRICES.**

|                                                                                       |        |
|---------------------------------------------------------------------------------------|--------|
| The Scientific American (weekly), one year                                            | \$3.00 |
| Supplement of the Scientific American (weekly), one year                              | 5.00   |
| Architect's and Builder's Edition of the Scientific American (monthly), one year      | 2.50   |
| La America Cientifica, Spanish edition of the Scientific American (monthly), one year | 3.00   |

**COMBINED RATES.**

|                                                                                                |        |
|------------------------------------------------------------------------------------------------|--------|
| The Scientific American and Supplement                                                         | \$7.00 |
| The Scientific American and Architect's and Builder's Edition                                  | 5.00   |
| The Scientific American, Scientific American Supplement, and Architect's and Builder's Edition | 9.00   |

This includes postage, which we pay. Remit by postal or express money order or check to order of Munn & Co., 361 Broadway, New York.

**RECENTLY PATENTED INVENTIONS.****Engineering.**

**STEAM GENERATOR.**—Pierre A. Chatelet, Paris, France. This invention consists principally of a tubular casing closed at its ends and adapted to be heated, the casing being connected with a water charging device arranged to spray in the water in a finely divided state, while a tube open at its inner end is held in the casing to form a narrow annular space for the passage of the vapor, as it is heated by the wall of the casing, to the open inner end of the tube. The highly heated dried steam is passed from the inner tube to a steam-receiving vessel or to the engine.

**SUBSTRUCTURE.**—Samuel A. Oliver, Houston, Texas. This is an improvement in substructures designed to form supports for bridge piers and similar uses. Combined with the main structure is an inclosing caisson for its lower portion, a filling between the caisson and the main structure, and an inclined protecting plate for the top of the caisson. This substructure is designed to be conveniently erected and strong, amply protected against the action of water, and so built that the protective part of it may be easily renewed when necessary.

**Railway Appliances.**

**CAR COUPLING.**—Michael Werner, Allegheny, Pa. In this device the coupling hook is pivoted in the drawhead, and has a tail and lip projecting down through and into a base slot, and a top extension projecting into an upper opening, a transverse shaft carrying a finger to engage the tail piece, while the ends of the shaft have each a crank at the side of the car, by which the shaft may be rocked to effect an uncoupling. The device may also be operated from the top of the car, and the coupling is entirely automatic as the cars come together. This coupling is very simple and inexpensive, and may be used when the opposing drawhead is only adapted for the ordinary form of link and pin coupling.

**CAR COUPLING.**—Levi W. Houghton, Bath, Me. This coupling is designed to be readily applied to drawheads of the ordinary construction, and is arranged for automatic coupling. The invention consists of arms mounted to swing and adapted to support the coupling pin, with an arm for moving the swinging arms, and supported on the drawhead, to be engaged by a like arm on the opposite drawhead of the approaching car.

**DRAW BAR ATTACHMENT.**—Wilber B. Orton, Nickerson, Kansas. This invention relates to lugs to take the thrust or pull of the drawhead or drawbar spring when a car is pulling or backing up. The lug plate forming the spring pocket has integral vertical solid lugs for receiving the thrust of the spring followers, the lug plate also having other novel features of construction to make the lugs strengthen the draught timbers.

**SPIKE.**—Emma A. Streeter, New York City, N. Y., and Bradford W. Nichols, Herkimer, N. Y. This is an improved double-shanked spike, the shanks being straight and parallel sided, with its points similarly beveled on opposite front and

rear sides, and the head having a lateral flange on the front side. This spike is designed to be employed wherever an ordinary spike may be used, and especially in laying railroad rails, the dual shanks holding so that the spike cannot be canting from side to side, and will not be loosened by the vibrations of the rails.

**Mechanical.**

**POWER TRANSMITTING MECHANISM.**—David C. Frazier, New Market, N. J. A shaft journaled in a suitable supporting frame carries a drive wheel or fixed gear, while on the shaft is mounted a tubular shaft having one or more toothed wheels arranged to mesh with the teeth on and traverse the periphery of the drive wheel, an internally toothed rim being formed on the peripheral edges of the toothed wheels. The invention also includes other novel features, the mechanism being designed to impart increased velocity and power to a rotary shaft with which it is connected.

**BALL COCK.**—Gaylord S. Hunter, Pawtucket, R. I. This is an improvement in hydraulic safety valves, such as are used for automatically shutting off the supply of a tank of any kind. It has a casing held in the wall of the tank, and when the water rises to the required height it lifts a float and tilts a lever to close the valve firmly upon its seat. The construction is such that, if the float or lever should be broken, the head of the water would close the valve. The device may be adjusted to automatically shut off the supply at any time, and it is designed to keep itself clean from rust or scale.

**LAST.**—Arthur M. Leighton, Port Townsend, Washington. This is an adjustable cobbler's last, automatically adjustable to closely fit any size of boot or shoe, no matter whether it has a pointed or wide toe. A reach bar having a locking notch connects the toe and heel sections of this last, a spiral spring wound around a portion of the bar bearing against the heel section. When the last is placed in a boot or shoe the several parts are expanded by the spring, which is released by pressing a catch on the outside, the last then completely fitting the boot or shoe, ready for the workman.

**Agricultural.**

**PLOW.**—Frederick S. Moore, Hanford, Cal. This plow is especially adapted for use in vineyards and orchards. The beam is pivoted to the forward part of a share-carrying frame, a short distance from its inner end, in which is a longitudinal slot, while an angle lever fulcrumed on the frame has on its inner end a pin working in the slot of the beam, there being between the handles a rack with which the upper end of the lever engages. With this construction the draught may be quickly and easily changed from right to left by the plowman, so that the near or off horse of a two or three horse team can walk in the furrow, and so throw the shares of the plow closer to a tree or vine than would otherwise be possible.

**HAY SLING.**—James M. Kellogg, Bozeman, Montana. The carrier of this device consists of a pole from which is projected a series of ropes terminat-

ing at their outer ends in rings or loops, and all adapted for attachment to a trip mechanism, a back rope having both ends secured to the pole being also connected with the tie rope of the trip mechanism. The hay or straw may be carried by this device from the delivery spout of a thrashing machine to the place where a stack is to be formed, the load not being dumped or spilled out except as it is placed in the desired position.

**BRANDING TOOL.**—John R. Todd, Glenrock, Wyoming. This implement consists of a tube with pointed ends, in which slides a plunger, while there is an adjustable gauge on the tube. The pointed end of the tube is plunged into an animal, and then a tag previously placed in the tube is driven inward through the tube by the plunger, the tag being left in the flesh under the hide after the tube is withdrawn. The tag cannot afterward be removed without mutilating the animal, being found in the beef only as it is marketed.

**Miscellaneous.**

**BICYCLE TIRE.**—George R. Bassett, New York City. This is a pneumatic tire on which is a tread piece, with two separate cushions between the wheel rim and tire, and a fibrous envelope around the cushion rings and between the tread piece and pneumatic tire. The improvement forms a detachable shoe, readily removable, partly or entirely, when desired, and preventing injury to the inner pneumatic tire.

**BICYCLE ATTACHMENT.**—Allen Marthens, Pittsburgh, Pa. This is a simple device for automatically locking the steering fork, and which may be readily released when necessary to bring the steering wheel under the complete control of the driver. A spring lock normally engages the fork to hold it from rotation in its sleeve, the lock having a vertical arm held from lateral movement, while a laterally movable swinging bearing member is carried by the fork and engages the lock rod, and an operating lever engages the bearing.

**CARRIAGE BRAKE.**—Philippe Brailly, Bellaire, Ohio. The brake beam of this device is journaled in vertical bearing blocks resting upon a transverse spring, in connection with which are an operating rope and guide pulleys, a winding drum, foot levers, pitmen, and intermittent gripping devices, forming a brake readily operated by foot power, and in which all the operative mechanism is concealed from view and protected from the elements. The connection of the body with the rear springs is also simplified, and the several parts of the brake mechanism are automatically returned to their normal position after the brake is released.

**CURRYCOMB.**—George W. Neuls, Kane, Pa. The body and teeth of this implement are made entirely of wood, and the grain of the wood runs lengthwise with the teeth, the latter being so tapered that they will be thoroughly effective without producing undue irritation, and without tearing or cutting the hair. The comb is so made as to be very durable and inexpensive, means being provided for attaching the handle to the body in a very solid manner.

**BRIDLE.**—Alexander and Louis Hasselbauer, New York City. This invention provides a

simple and durable bit support, conveniently adjustable to properly fit the animal's head without the use of buckles or similar fastening devices. It consists of a single endless strap doubled upon itself and formed into two cheek sections and throat latch sections, bit-supporting loops being formed at the juncture of the lower ends of the side sections, while a slide or ring connects the throat latch sections above the bit loops, above which also is a nose strap, and a slide or ring connects the upper crossed ends of the cheek and throat latch sections.

**COMBINATION TICKET.**—Martin Ralph, Queens, N. Y. This ticket has a central continuous web, sufficiently strong to hold the tickets together, but which may be readily torn asunder when necessary, the tickets being separate upon the web, and the loss of time necessary to cut apart being thus saved. The improvement is applicable for railway coupon tickets, or for price or tag tickets, the tickets being provided in the latter case with fastening pins.

**LETTER BOX.**—Oliver P. Johnston and Calvin M. Gates, Butte City, Montana. This is an improved mail box for the reception of letters, papers and other mail matter, to protect the contents from the weather and keep them from the reach of unauthorized persons. The casing has at its top a letter slot and an opening to receive papers, etc., and a pivoted cap covers the slot and the opening. At one end of the casing is a door, fastened by a hasp and lock.

**ELEVATOR.**—Lucas M. Kuehn, Wabasha, Minn. This is a device more especially designed for use on large ice boxes and other receptacles, for conveniently elevating and depositing blocks of ice or other articles in the receptacles. It consists of a frame adapted to be raised and lowered on which is mounted to swing a platform that may be automatically tripped to move into an inclined position to deliver the elevated article into the desired place.

**SHIFTING DEVICE FOR ELEVATORS.** James Flemming, Buffalo, N. Y. A simple and durable device is provided by this invention, more especially designed for grain elevators used to load or unload vessels, and arranged to conveniently shift the elevator leg, to hold it in contact with the grain. The leg is pivoted at its upper end to the frame, while a swinging arm pivoted to the frame engages at its free end the back of the elevator leg, a counterweight holding the free end up against the leg, novel means being provided for operating the swinging arm.

**GUN.**—Robert A. Steinert, Washburn, Wis. The breech of this gun has a transverse recess in which is mounted a sliding breech-block carrying a spring-projected firing pin engaged by a detent, a cam or incline on the breech being adapted to retract the pin, for which there is also a releaser adapted to release the pin when the breech block reaches its inner or closed position, or which may be moved into inactive position. The construction is simple and durable, and arranged to securely lock the cartridge in place for firing and at the same time actuate the firing pin.

**OIL FILTER.**—Oskar Lindberg, Helsingborg, Sweden. This is a sectional filter, which may be readily taken apart, cleaned and put up again, and its construction is such that the oil placed in the upper



portion percolates through various layers of filtering material and strainers, reaching the bottom thoroughly cleansed of all impurities. The filter has a series of valves whereby the flow of oil may be stopped at any desired point in the length of the filter.

**HOT WATER HEATER.**—Micheal E. Herbert, St. Joseph, Mo. In this heater, all the walls of the fire box constitute a water space, the grate also consisting of water tubes, and a series of drop tubes being arranged in the path of the discharge of the products of combustion, affording a great amount of surface for the absorption of heat. The construction is designed to be economical in fuel and a rapid heater, and the different parts are so arranged as to be light of weight, easy to handle, and quickly connected together, masoury being dispensed with in the setting up. It is designed also to thoroughly burn the smoke and gases, and to be easily cleaned.

**LAMP CHIMNEY COVER PLATE.**—James H. Hunt, Massillon, Ohio. This is a plate of non-combustible material, preferably mica, with a central aperture of less diameter than the lamp chimney, and fitting over its top, another plate sliding in guides being adapted to increase or diminish the draught. The device is designed for attachment to any kind of chimney, and by adjusting the pressure until the flame stops smoking a compact, even and dense light is produced, of much greater volume than the same pressure will produce with the plate removed.

**CHIMNEY RACK.**—Nehemiah H. Brown, Norwich, N. Y. This is a show rack for supporting the chimneys so they will be well displayed to view and readily accessible. It consists of a rotating cone having pins set at an angle in its side, a base and shaft supporting the cone.

**RACK FOR HATS, ETC.**—Howard U. Ackerman, North Indianapolis, Ind. This device has a wall board with enlarged openings for the passage of pins and their lugs, and the rack comprises a series of brackets each formed with hooks and connected by rods to each other to form a shelf.

**SASH-CORD FASTENER.**—Margaret J. Huffman, Ashland, Pa. This device consists of a box or casing to be secured in the upper ends of the stiles of each window sash, the box having an open outer side, a slot in its outer edge at the top, and pins, a hinged cover, and a double latch. When it is desired to remove the sash from the window, it is pulled out of its guideways, the lid of the box is swung, and the cord readily removed from the casing, so that the sash is disconnected, and can be moved away as may be desired.

**CASH RECORDER AND DRAWER.**—Lloyd M. Mills, Grand Rapids, Mich. This is a machine arranged to print on a tape a record of all sales made, and also print on a tape a detachable ticket indicating the individual sale. The device has a suitable casing in the bottom of which slides a money drawer, the locking bolt of which is connected with a lever. By the use of ten keys the operator can record any sale from one cent to a hundred dollars, the recording tape remaining inside the locked casing, and a corresponding coupon for each sale being cut off by a spring-pressed knife.

**BOOK OR COPY HOLDER.**—Barney Gardiner, Chippewa Falls, Wis. This is a simple device to support copy or a book at a distance above a table, in such position as may be desired. The device is capable of quick and convenient manipulation, and when not in use may be folded to occupy but a small space.

**AUTOMATIC ADVERTISING DEVICE.**—Theodore B. Hafertop, Chicago, Ill. An exhibitor for use in public conveyances is provided by this invention. It consists of an endless band supported to move longitudinally on a bracket frame projecting from the side or roof inside the vehicle, the band carrying advertisements in series, and motion being communicated to it from the car axle, so that when the car is moved in either direction all the advertisements on the band will be brought into view.

**DISINFECTING APPARATUS.**—Emil and Salomon Tausig, New York City. The graduated discharge of a disinfecting fluid in places needing such treatment is the object of this invention. The device is simple and inexpensive, and can be automatically actuated to allow the escape of the fluid, which is retained from discharge by hermetically sealing the containing vessel above the fluid that will flow from below when the partly established vacuum produced by such sealing is broken, and air admitted to equalize pressure of the atmosphere above the fluid and at the point of discharge.

**ELECTRO-THERAPEUTIC PROCESS AND APPARATUS.**—Joshua M. Wardell, Cadillac, Mich. This invention provides a process and an implement to facilitate injecting a fluid into the vaginal canal, and then applying an electrical current to and disseminating it through the fluid.

#### Designs.

**SPOON.**—J. S. Rathbone, Mystic, Conn. The handle of this spoon has a configuration and ornamentation representative of the golden rod, and inclosing a bust-like figure of Washington, while the bowl is ornamented by a shield.

Another design for a spoon by the same inventor also utilizes the golden rod in a similar manner, but the handle has on the front a different bust-like figure and on the back a shield, while in the bowl is a representation of an eagle.

**SCARF PIN.**—John G. Brokaw, Somerville, N. J. The head of this pin is an oval ring having ornamental appendages, a disk representing an eye, another disk showing a heart, and intermediately a representation of clasped hands, while a laterally curved bar is arranged on one side of the oval ring.

**NOTE.**—Copies of any of the above patents will be furnished by Munn & Co., for 25 cents each. Please send name of the patentee, title of invention, and date of this paper.

#### NEW BOOKS AND PUBLICATIONS.

**THE CALIFORNIA VINE DISEASE.** A preliminary report of investigations. By Newton B. Pierce. Washington: Government Printing Office. 1892. Pp. 222.

This monograph is an excellent exemplification of the solid work done by the Department of Agriculture of Washington. It is excellently printed and illustrated, some colored prints being especially worthy of notice. It has a very long index, and, if it may be accepted as a pledge of the work to be done by that department in the future, it will have the tendency to make all farmers wish well for the last of the federal departments.

**ENERGY AND VISION.** By S. P. Langley. National Academy of Sciences. Vol. V. First memoir. Pp. 18; 4 plates.

In commencing his paper the author says: "While it is quite a familiar fact that the luminosity of any spectral ray increases proportionately to the heat in this ray, and indeed is but another manifestation of the same energy, I have recently had occasion to notice that there is on the part of some physicists a failure to recognize how totally different optical effects may be produced by one and the same amount of energy, according to the wavelength in which this energy is exhibited. I have undertaken, therefore, during the last few months, an experimental reinvestigation of this subject with such a statement especially in view." The experiments are very interesting to those who are fond of advanced physics and reflect great credit upon this eminent scientist.

**NATURE STORIES FOR YOUNG READERS.** Boston: D. C. Heath & Co. An instructive little book for young people. Price 30 cents.

**LE REGIME DES EAUX A LILLE.** Etude sur l'Hygiene et l'Assainement des Villes. By Ange Descamps. Publication of the Société Industrielle du Nord de la France. 8vo. Pp. 140. Maps and plans.

This report is chiefly interesting to civil engineers, and we might remark to the engineers of Lille, for the work is of purely local interest. The Lillois are evidently extremely well pleased with their water supply, their sewers—and themselves.

## SCIENTIFIC AMERICAN

### BUILDING EDITION.

DECEMBER NUMBER.—(No. 86.)

#### TABLE OF CONTENTS.

1. Elegant plate in colors, showing a very attractive dwelling at Warberth Park, Pa., erected at a cost of \$4,150 complete. Floor plans and two perspective elevations. John Robinson, architect, Germantown, Pa.
2. Plate in colors showing a residence at Springfield, Mass. Perspective views and floor plans. Cost \$12,000 complete. Mr. Guy Kirkham, architect, Springfield, Mass. An excellent design.
3. A colonial residence at Newton Highlands, Mass. Perspective view and floor plans. J. W. Beak, architect, Boston. A picturesque design.
4. A pretty cottage erected at Bridgeport, Conn., at a cost of \$1,600. Floor plans, perspective, etc. A. M. Jenks, architect, Bridgeport, Conn.
5. A dwelling house erected at Warberth Park, Pa., at a cost of \$4,478 complete. Mr. C. W. Macfarlane, architect, same place. A model design. Floor plans and perspective.
6. A "Queen Anne" cottage erected at St. David's, Pa., at a cost of \$5,500 complete. A unique design. Perspective elevation and floor plans. F. L. & W. L. Price, architects, Philadelphia.
7. A residence in the "Colonial" style of architecture, erected at St. David's, Pa. Perspective view and floor plans. Cost complete \$5,800. F. L. & W. L. Price, Philadelphia, architects.
8. A residence on Golden Hill, at Bridgeport, Conn. Perspective elevation and floor plans. D. R. Brown, architect, New Haven, Conn. An excellent design.
9. A residence recently erected at Springfield, Mass. Floor plans and perspective elevation. Cost \$2,490 complete. Mr. A. B. Root, architect, same place. A pleasing design.
10. Picture of Aldworth, Sussex, the home of Lord Tennyson. Portrait of Lord Tennyson.
11. Sketch for a cottage at Saucelito, Cal.
12. Design for a thirty-story building.
13. Sketch of residence of Mr. Howard Bell, Atlanta, Ga.
14. Miscellaneous contents: Some of the merits.—Water tight cellars.—Read this with care.—Improve your property.—How to catch contracts.—The education of customers.—Erection of additional buildings.—Concave sounding boards.—A high railway bridge.—A complete steel house front, illustrated.—An improved woodworking machine.—Finely carved woodwork, illustrated.—Steam and hot water radiators, illustrated.—Plaster of Paris.—Disinfection by means of sulphur.—A novel newspaper building.—Fine steel ceiling in an art gallery.

The Scientific American Architects and Builders Edition is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,  
361 Broadway, New York.

## Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue.

Pattern letters and figures may be ordered from the largest variety, of Knight & Son, Seneca Falls, N. Y. Acme engine, 1 to 5 H. P. See adv. next issue.

"U. S." metal polish. Indianapolis. Samples free. Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J. Best baling presses. Ryther Mfg. Co., Watertown, N. Y. Universal and Plain Milling Machines. Pedrick & Ayer, Philadelphia, Pa.

Jessop's Steel has been in the market ninety-nine years. Few tool makers not familiar with it.

Steam Hammers, Improved Hydraulic Jacks, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York. Stow flexible shaft. Invented and manufactured by Stow Mfg. Co., Binghamton, N. Y. See adv., page 396.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York. Portable engines and boilers. Yacht engines and boilers. B. W. Payne & Sons, Elmira, N. Y., and 41 Dey Street, New York.

THE ENGINEERING RECORD (Prior to 1887, the Sanitary Engineer). Published Saturdays. 277 Pearl Street, New York. 12 cents a copy.

To Let—A suite of desirable offices, adjacent to the Scientific American offices, to let at moderate terms. Apply to Munn & Co., 361 Broadway, New York.

Hydrocarbon Burner (Meyer's patent) for burning crude petroleum under low pressure. See adv. page 381. Standard Oil Fuel Burner Co., Fort Plain, N. Y.

Fine Castings in Brass, Bronze, Composition (Gun Metal), German Silver. Unequaled facilities. Jas. J. McKenna & Bro., 424 and 426 East 23d St., New York.

For Sale—Foundry and blacksmith works making a specialty. Will sell cheap. Good reasons for selling. Inquire of F. D. Vreeland, 91 Bridge St., Paterson, N. J.

For the original Bogardus Universal Eccentric Mill, Foot and Power Presses, Drills, Shears, etc., address J. S. & G. F. Simpson, 26 to 36 Rodney St., Brooklyn, N. Y.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, \$4; Munn & Co., publishers, 361 Broadway, N. Y.

Competent persons who desire agencies for a new popular book, of ready sale, with handsome profit, may apply to Munn & Co., Scientific American office, 361 Broadway, New York.

Wanted—Engineers and pilots. Twenty licensed engineers and pilots to run small passenger steamers for the summer months of 1893, in connection with the World's Fair. Sober, steady men are invited to write us for further information. Chas. P. Willard & Co., Clybourn and Southport Aves., Chicago, Ill.

The *Engineering Record*, the recognized authority on municipal and building engineering, has recently been enlarged by the addition of a department in which notable industrial plants are regularly described and illustrated, the steam and power plants being a conspicuous feature. Recent publications include the great Ivorydale plant of Messrs. Proctor & Gamble, described in 23 columns and illustrated by 57 drawings. The steam plant at Ivorydale is separately treated in 13 columns and 31 drawings. The new foundry of Henry R. Worthington, at Elizabethport, N. J., 16 columns, 26 illustrations. National Meter Company's foundry and brass finishing shop, Brooklyn, 13 columns, 29 illustrations. Niagara Power Plant (now in process of publication), 6 columns, 6 illustrations. Steam power plant of the Dwight Manufacturing Co., Chicopee, Mass., 9 columns, 7 illustrations. Machinery Hall steam power plant, 8 columns, 6 illustrations. Published Saturdays. 12 cents a copy. The *Engineering Record*, 277 Pearl St., New York.

Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

## Notes & Queries

#### HINTS TO CORRESPONDENTS.

**Names and Address** must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.

**References** to former articles or answers should give date of paper and page or number of question. **Inquiries** not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

**Special Written Information** on matters of personal rather than general interest cannot be expected without remuneration.

**Scientific American Supplements** referred to may be had at the office. Price 10 cents each.

**Books** referred to promptly supplied on receipt of price.

**Minerals** sent for examination should be distinctly marked or labeled.

(4617) R. L. B. asks: Who was the inventor of the friction match? A. It is said M. Derosne made a friction match with a phosphorus tip in 1816. An impetus was given to the match industry by the Dobreiner lamp, and in 1827 the first really practical friction matches were made by Mr. John Walker, a druggist of Stockton-on-Tees. They were known as "Congreves," and consisted of wooden splints or sticks of cardboard coated with sulphur and tipped with a mixture of antimony sulphide, potassium chlorate and gum. Each box contained 84 and they were retailed at a shilling. With each box there was supplied a folded piece of glass paper, the folds of which were to be tightly pressed together when the match was drawn through them.

(4618) R. F.—To become a first class electrician or electrical engineer, you will need, first of all, a good mathematical education. If you have not a good education, you can of course secure it by studying the ordinary school books. If you are well up in mathematics, the rest is simple and plain. By studying electrical books you can acquire a knowledge of elec-

tricity. Latin, while it is desirable, is not absolutely necessary to an electrical engineer. We would suggest the following books for your use: "Experimental Science," Ayrton's "Practical Electricity," Thompson's "Dynamo Electric Machinery," Kempe's "Hand Book of Electrical Testing," Lockwood's "Electrical Measurements," Sloane's "Electrical Arithmetic."

(4619) R. M. F.—German silver has 13 times the resistance of copper. It requires of No. 16 copper wire 234½ feet for the resistance of 1 ohm. As stated above, it will require only 1-13 of this amount of German silver of the same size for 1 ohm. With this as a basis, if you know the resistance of your lamp, you can make the necessary calculations.

(4620) W. P. C.—You can make your moulds of wood or metal. If you intend to use them a great deal, it would, perhaps, be well to make them of hard bronze. Your clay cylinder should first be dried in the open air, then heated slowly to a red heat and kept at that heat for several hours. It requires experience to judge when the work is done. We would suggest the purchase of a work on pottery.

(4621) O. J.—There is very little action in the battery referred to when the circuit is open. Carbon pieces can be granulated, and pulverized and moulded together after being mixed with a little flour and molasses and then baked. See "Experimental Science," for information on moulding carbons. For points on nickel and silver plating consult SUPPLEMENT, No. 310.

(4622) T. J. R.—If most of the lines of force pass to the armature as indicated by your sketch, it serves to render the core more magnetic and thereby increases the efficiency of the machine. It is not definitely settled that it is advantageous in all machines to provide teeth as suggested.

(4623) W. Z. writes: We have a private telegraph line of 12 instruments, each wound to 20 ohms resistance. Could we run the line with a dynamo? Will it be less expensive than batteries, considering that we construct the dynamo ourselves, and also have free use of water power to run it? A. You can operate your telegraph line by means of a dynamo, but we think a battery would be preferable for a small installation, as it is always ready for use.

(4624) J. F.—The only suggestion we can make in regard to your belt is to wet it evenly all over, stretch it until it is straight, and allow it to dry, afterward filling the leather with some of the dressings used for that purpose. We think, however, it will be better for you to write to the manufacturers of the belt. They may have more simple treatment.

(4625) C. L. S.—If you have placed the poles of your dynamo on an iron base, you cannot expect it to work as a dynamo, and it would not be a success as a motor. Place the machine of a wooden or a brass base, and you will find it will behave quite differently.

#### TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequalled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

## INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

December 13, 1892,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

|                                                                |         |
|----------------------------------------------------------------|---------|
| Account keeping device, W. W. Maxwell.....                     | 487,953 |
| Adhesives, production of, L. Kern.....                         | 487,928 |
| Aging and purifying liquors, apparatus for, A. L. Wood.....    | 488,104 |
| Alarm, See Burglar alarm. Fire alarm.....                      | 488,111 |
| Animal trap, J. R. Bromwell.....                               | 488,016 |
| Armature, electric machine, B. G. Lamme.....                   | 487,881 |
| Armature for electro-magnetic machines, R. Lundell.....        | 487,755 |
| Atomizer, C. M. Blackman.....                                  | 487,873 |
| Autographic register, W. H. Glenmon.....                       | 488,004 |
| Automatic regulator, Houghton & White.....                     | 488,121 |
| Automatic switch, N. Newman.....                               | 487,881 |
| Axes, manufacture of, C. W. Hubbard, Jr.....                   | 487,948 |
| Balance, L. Da Rozir.....                                      | 488,142 |
| Baling silvers, machine for, W. M. Pawling.....                | 487,891 |
| Band cutter and feeder, W. P. Burke.....                       | 487,987 |
| Banjos or violins, tail piece for, H. C. Middlebrooke.....     | 487,879 |
| Barrel head machine, F. H. Kane.....                           | 488,167 |
| Bath tub seat, G. A. Keene.....                                | 488,011 |
| Battery, See Galvanic battery.....                             |         |
| Bed spring, J. B. Russel.....                                  | 488,030 |
| Beer cooler, W. Gibson.....                                    | 488,144 |
| Beer filling apparatus, H. Stockheim.....                      | 487,790 |
| Belt, electric, O. Klorstad.....                               | 488,013 |
| Belt holder, W. F. Cleveland.....                              | 487,933 |
| Belting, O'Connell & Medcraft.....                             | 487,855 |
| Bench dog or clamp, G. B. Norman.....                          | 487,762 |
| Bicycle saddle, J. A. Stenberg.....                            | 487,769 |
| Bit, See Bridle bit. Dado or moulding bit.....                 |         |
| Blacking kit, boot, H. Pistorius.....                          | 487,933 |
| Blank feeding device, W. W. Miner.....                         | 488,084 |
| Block, See Snatch block.....                                   |         |
| Blower, centrifugal, M. R. Ruble.....                          | 487,883 |
| Bobbin used in spinning and twisting frames, J. H. Wilson..... | 488,045 |
| Boiler, See Steam boiler. Tubular boiler.....                  |         |
| Boiler, T. L. & T. J. Sturtevant.....                          | 487,793 |
| Boilers, downdraught furnace for steam, J. F. Wanger.....      | 487,836 |
| Bolting reel, flour, G. L. Jarrett.....                        | 487,838 |
| Bottle stopper lock, F. Jordan.....                            | 487,748 |
| Bottle washer, S. R. King.....                                 | 487,842 |
| Bottle washer and rinser, O. Eick.....                         | 487,999 |
| Box, See Fruit box. Paper box.....                             |         |
| Box machine, J. Neff.....                                      | 488,086 |
| Box machine, C. W. Roberts.....                                | 487,967 |
| Bracket, See Sign bracket.....                                 |         |
| Brake, See Car brake. Roller brake.....                        |         |
| Brick, drying, C. J. Dion.....                                 | 487,827 |
| Brick machine, S. P. Babcock.....                              | 488,106 |
| Brick press, G. H. Babcock.....                                | 488,049 |
| Bridge, L. Barnes.....                                         | 487,819 |
| Bridle bit, W. J. Barnard.....                                 | 488,051 |
| Bundle carrier and band cutter, A. Booth.....                  | 487,807 |
| Burglar alarm, W. W. Climensen.....                            | 488,162 |
| Burner, See Gas burner. Lamp burner. Oil burner.....           |         |



Button and buttonhole, adjustable, F. S. Rudge. 488,090  
 Button blanks, device for grinding, J. Huebner. 487,741  
 Button, collar, D. O. Parks. 488,028  
 Calendar, L. Lane. 487,929  
 Camera shutter, J. W. Grantland. 487,833  
 Cane mill, Sanders & Herrington. 488,031  
 Capsule filler, C. F. Hausmann. 487,886  
 Car body, W. N. Haring. 487,925  
 Car brake, F. Fairman. 488,118  
 Car brake, T. A. Marriott. 487,868  
 Car brake, L. Pfingst. 487,768  
 Car coupling, C. W. Diederich. 487,916  
 Car coupling, P. Doersom. 487,885  
 Car coupling, W. S. Edwards. 488,065  
 Car coupling, W. N. Haring. 487,924  
 Car coupling, Haub & Dasha. 488,120  
 Car coupling, P. Hien. 487,926  
 Car coupling, C. T. Kincaid. 487,751  
 Car coupling, C. Leischer. 488,078  
 Car coupling, F. S. McConnell. 488,173  
 Car coupling, A. S. Merritt. 487,756  
 Car coupling, E. B. Reid. 487,745  
 Car coupling, W. H. Stults. 488,153  
 Car coupling, T. Welch. 488,159  
 Car, freight, C. B. Hutchins. 487,743  
 Car, railway, A. Fordham. 487,918  
 Car replacer, W. H. Darling. 487,964  
 Car safety, J. B. Johnson. 487,745  
 Car step, automatic, J. MacCollom. 487,867  
 Cars, apparatus for transferring railway, A. D. Clarke. 487,717  
 Cars, vestibule connection for passenger, E. C. Rosa. 487,776  
 Carbon sheet, J. S. McDonald. 487,788  
 Carriage, W. H. Sparks. 487,788  
 Carrier. See Bundle carrier. Hay carrier.  
 Cart, four-wheeled dog, W. H. Barlow. 487,942  
 Cart, road, A. D. Curry. 487,998  
 Carving machine, H. H. Adams. 488,047  
 Cash carrier, M. W. Mefford. 487,935  
 Cash indicator and recorder, T. Carney. 488,063  
 Cash register, Goodenberger & Akins. 487,922  
 Cash register, H. A. Herr. 487,903  
 Cash register and indicator, E. Murphy. 488,150  
 Chasing pipe, flask for, W. White. 487,810  
 Chair. See Folding chair. Reclining chair. Window chair.  
 Chamber, O. P. Johnson. 487,747  
 Change maker and receiver, Hill & Alter. 488,007  
 Chart, dress, B. Viau. 487,801  
 Chimney cow, rotary, H. & L. Iwan. 488,074  
 Chopper. See Corn chopper.  
 Churn, A. Richter. 487,870  
 Clamp. See Floor clamp.  
 Clasp, J. Lang et al. 488,017  
 Cleaner. See Knife cleaner. Window cleaner.  
 Clip for supporting dresses, etc., E. C. Mix. 487,757  
 Clock, repeating, A. Selkirk. 488,108  
 Clod crusher and land roller, combined, H. F. Derrnell. 487,722  
 Cloth cutting machine, C. Kaufman. 487,840  
 Clutch, friction, L. J. Hirt. 487,736  
 Coal storage conveyor, G. H. Hulett. 487,895  
 Collar, horse, W. Murr. 487,895  
 Compasses, beam, W. S. Robinson. 487,892  
 Condenser, T. Craney. 487,997  
 Cooler. See Beer cooler.  
 Cotton chopper, J. Y. Dye. 487,725  
 Cotton chopper, I. E. Gay. 487,831  
 Cotton chopper, W. J. Gay. 487,935  
 Coupling. See Car coupling. Electric coupling.  
 Hose coupling. Pipe coupling.  
 Crane, swinging, J. W. Kinsman. 488,076  
 Crane turning mechanism, C. Mercader. 487,954  
 Cream tempering apparatus, J. Boyd. 487,708  
 Crematory, garbage, E. Kessler. 488,169  
 Crosshead, C. Standwood. 487,895  
 Crusher. See Cud crusher.  
 Cultivator, J. Birch. 487,978  
 Cultivator, F. P. Morgan. 487,933  
 Cultivator, J. H. Wendel. 487,897  
 Cultivator, W. E. Fenshire. 487,882  
 Cultivator, A. C. Hitting. 487,811  
 Curtain fixture, W. A. Saul. 487,970  
 Cutter. See Band cutter. Cud cutter. Paper cutter.  
 Cutter for gaskets, etc., J. H. Shields. 487,894  
 Cylinder lock, S. Sargeant. 487,963  
 Dado or moulding bit, E. Gollins. 487,921  
 Dampening machine, F. H. Weems. 488,102  
 Dental crowns, forming, J. G. Hollingsworth. 488,008  
 Dental plugger, H. R. Kline. 487,843  
 Dental regulator, J. A. Ellard. 487,726  
 Dental separator, B. Simons. 487,973  
 Digesting apparatus, A. Selkirk. 487,788  
 Disinfecting device, J. W. Bowerbank. 487,979  
 Disintegrating fibrous substances, process of and apparatus for, Carter & Berst. 487,912  
 Disintegrating machine, fiber, Carter & Berst. 487,913  
 Disintegrating vegetable substances, A. Selkirk. 487,788  
 Doll joint, E. Verjillier. 487,861  
 Dough raiser and fruit drier, Kline & Parks. 488,014  
 Drawbar carrier, and face plate, C. T. Schoen. 487,779  
 Drier. See Grain drier. Lumber drier.  
 Drill. See Seed drill.  
 Drill, D. Baker. 488,050  
 Drop press, steam, J. H. Mason. 488,128  
 Easel, cabinet, H. Pistorius. 487,964  
 Eaves trough fastener, R. G. Kelso. 488,075  
 Edge runner or vertical millstone, H. Mantey. 487,930  
 Electric coupling, J. J. Purcell. 488,146  
 Electric lighting systems. time meter for, J. O. Ball. 488,107  
 Electric machines, automatic safety device for dynamo, F. B. Badt. 487,816  
 Electric meter, C. W. Ayton. 487,703  
 Electric motor, E. Storey. 488,041  
 Electric signal circuit, J. Young. 488,138  
 Electrical safety cut-out, H. S. Keating. 488,123  
 Electrodes, manufacture of secondary battery, W. W. Griscom. 487,834  
 Electrolytic apparatus, T. Craney. 487,996  
 Electrotype plates, means for bending, C. B. Cottrell. 487,915  
 Elevator. See Hydraulic elevator. Newspaper elevator.  
 Elevator safety appliance, R. Uren. 488,137  
 End gate locking rod, T. M. Owen. 487,766  
 Engine. See Gas engine.  
 Essence, process of and apparatus for making, H. Huvelle. 487,837  
 Exhaust head, J. J. De Rycke. 487,723  
 Fare register, J. W. Fowler. 487,731  
 Fauet, K. Kiefer. 487,866  
 Feed mechanism, duplex, F. H. Richards. 487,775  
 Feedwater heater, and pump, J. J. De Rycke. 487,731  
 Feeding and weighing apparatus, S. Washington. 488,101  
 Fence post with applied holder, G. W. Schofield. 487,780  
 Fertilizer distributor, T. R. Crane. 487,719  
 Fifth wheel, H. H. Bothe. 488,110  
 Fifth wheel, E. L. Howe. 488,010  
 Fire alarm, pneumatic, J. A. Lehmann. 488,003  
 Fire extinguisher, B. J. Gilmore. 488,003  
 Fireproof garment, B. J. Martin. 488,148  
 Flask. See Moulder's flask.  
 Floor clamp, F. Martin. 488,147  
 Flushing tank, C. C. Sever. 487,906  
 Folding chair, J. Cornell. 488,165  
 Folding chair, knockdown, Scott & Schaa. 488,065  
 Folding seat, J. B. Jensen. 487,876  
 Fortune wheel, coin-controlled, Russell & Gierding. 487,968  
 Frame. See Supporting frame.  
 Fruit box, W. R. Stockler. 488,040  
 Fruit packages, shearing machine for, J. H. Schumacher. 487,781  
 Fruit picker, R. Mays. 487,931  
 Fumes, apparatus for condensing, A. F. Schneider. 487,971  
 Furnace. See Garbage burning furnace. Smoke consuming furnace. Tempering furnace.  
 Furnace, T. P. Mahon. 488,171  
 Galvanic battery, H. T. Johnson. 487,839  
 Game board, J. S. Williams. 487,976  
 Game, mechanical ball, Curtis, Jr., & Hallowell. 487,825  
 Garbage burning furnace, J. C. Kessler. 488,108  
 Garment catcher, making, E. S. Smith. 488,135  
 Garment fastening, H. A. Francis. 488,068  
 Garment supporter, J. C. Pettibone. 488,088  
 Gas burner, self-lighting, A. P. Jacob. 487,744  
 Gas burners, automatic cut-off for, F. W. Merchant. 488,082  
 Gas engine, E. W. Evans. 488,165  
 Gas engine igniting apparatus, H. Schumm. 488,093  
 Gas lighter, electric, Kilburn & Van Etten. 488,012  
 Gas meter, H. A. Tobey. 487,738  
 Gas meter register, H. A. Tobey. 487,908  
 Gate. See Sliding gate. Water gate.  
 Gate, Cline & Kilpatrick. 487,718  
 Generator. See Steam generator.  
 Glass, apparatus for rolling plate, E. Walsh, Jr. 487,803  
 Glass rolling machinery, E. F. Chance. 488,114  
 Globe, geographical, I. & M. A. Hodgson. 488,071  
 Glove fastener, J. C. Ruddy. 487,822  
 Grain drier, H. T. Hopkins. 488,173  
 Grate, tubular water, R. MacFarlane. 488,170  
 Gravity motor, J. E. Carver. 487,715  
 Grinding wheel, drills, holder for, J. H. Bergstrom. 488,054  
 Gun, repeating breech-loading, W. H. Ostrander. 11,295  
 Hammock for producing, A. O. Hood. 487,887  
 Harness, B. F. Baker. 487,940  
 Harrow and cultivator, combined, N. P. Lewis. 487,848  
 Hat ventilating device, E. J. Sharp. 487,786  
 Hay carrier, W. G. Ricker. 487,856  
 Hay carrier and elevator track, J. E. Porter. 487,966

Heater. See Feedwater heater. Tank heater.  
 Heater, J. Nelson. 488,131  
 Hinge, G. W. Gould. 488,068  
 Hinges, making but, R. T. Smith. 487,939  
 Hitching post, C. W. Erath. 487,727  
 Hog trough, J. C. F. Hurst. 487,836  
 Hoisting apparatus, J. E. Walsh. 488,044  
 Hoisting machine, differential, C. F. Cliff. 487,994  
 Holdback, vehicle, W. Dunn. 487,828  
 Hook. See Snap hook.  
 Hoop, W. H. Westen. 487,863  
 Horseshoeing apparatus, J. Lamb. 488,077  
 Hose coupling, Schiemper & Zoller. 487,893  
 Hub blank for metal wheels, J. R. Little. 488,125  
 Hydraulic or pneumatic, nichelbacker & Hughes. 488,015  
 Hydraulic elevator, I. E. Brown, Jr. 487,709  
 Ice run, portable, I. A. Manchester. 488,080  
 Indicator. See Cash indicator. Speed indicator.  
 Injector, J. Trix. 488,099  
 Insulating electric conductors, C. Cuttriss. 488,141  
 Insulator, C. Wirt. 488,046  
 Jacking lift. See  
 Journal bearing, J. M. Andrews. 487,815  
 Keyboard operator, automatic, H. S. Prentiss. 487,936  
 Knife cleaner and polisher, J. F. C. Farquhar. 487,728  
 Knit goods, method of and apparatus for making, C. G. Rogers. 488,019  
 Knitting machine, circular, Ward & Lansdowne. 488,100  
 Knitting machine stop mechanism, circular, Snyder & Fisher. 488,039  
 Lamp burner, central draught, J. C. Miller. 487,955  
 Lamp burner filler attachment, G. B. N. Dow. 488,164  
 Lamp chimney, shaded, D. M. Mefford. 487,850  
 Lamp, incandescent, E. W. Applegate. 488,139  
 Lamps, casting for bases of incandescent, Lean & Bureigh. 487,846  
 Lamps, manufacture of incandescent electric, C. Authonier. 487,890  
 Lantern, magic, D. R. Breed. 488,067  
 Lantern slides, clamp for binding the edges of, D. R. Breed. 488,058  
 Lap stick inserter, A. M. Collier. 487,905  
 Lath tool, J. H. Hurley. 488,145  
 Lifting jack, W. R. Proctor. 487,770  
 Lighter, pocket, J. E. Brown. 487,845  
 Lightning arrester, W. R. Garton. 488,062  
 Lime, apparatus for making bisulphite of, W. H. Howell. 487,887  
 Link, separable, C. S. Kershaw. 487,841  
 Liquid separator, centrifugal, H. F. Beilming. 487,943  
 Liquid separator, means for regulating the flow of, E. E. Baldwin. 487,817  
 Lock. See Bottle stopper lock. Cylinder lock.  
 Lock, C. E. Deny. 487,945  
 Lock, J. R. Long. 487,878  
 Lock, J. F. Schlossstein. 488,061  
 Lubricator, C. W. W. 488,067  
 Lumber drier, J. W. Piver. 487,965  
 Machinery, adjustable connection for, C. De Kalb. 487,721  
 Magnetic separator, H. S. Chase. 488,064  
 Mangle, M. E. Wendell. 487,872  
 Meat mixing machine, J. Fritz. 488,068  
 Metal sheets, machine for drying and fluting, Norton & Hodgson. 488,025  
 Metal wheels, die for making, J. R. Little. 488,127  
 Metal wheels, machine for making, J. R. Little. 488,124  
 Metal wheels, making, J. R. Little. 488,126  
 Meter. See Electric meter. Gas meter.  
 Meter registers, art and mechanism for recording the state of, H. A. Tobey. 487,909  
 Mill. See Cane mill.  
 Moulder's flask, F. Morris. 487,851  
 Moulding machine, H. A. Billings. 488,055  
 Moon's orbit, apparatus for delineating the, J. Trolinger. 487,821  
 Mop wringer, W. H. Betts. 487,711  
 Motor. See Gravity motor. Spring motor.  
 Mower, lawn, H. Broom. 487,711  
 Multiple switchboard busy test apparatus, J. L. McQuarrie. 487,854  
 Multiple switchboard busy test circuit and apparatus, J. L. McQuarrie. 487,853  
 Multiple switchboard circuit, A. H. McCulloch. 487,852  
 Multiple switchboard signal, G. Taintor. 487,795  
 Multiple switchboard test circuit, O. A. Bell. 488,053  
 Multiple switchboards, means for preventing induction in cables of, E. Scribner. 488,034  
 Music, apparatus for turning over the leaves of, C. Pittrich. 487,769  
 Music rack attachment for guitars, etc., P. Benson. 487,820  
 Musical instrument strings, impervious case for containing, F. H. Griffith. 488,005  
 Napkin adjuster, E. B. Burnett. 487,771  
 Newspaper elevator, A. R. Stone. 487,791  
 Nut or pipe wrench, J. P. Hunt. 487,742  
 Oil burner, J. Barrow. 488,108  
 Oiler, die stock, G. L. Le Vesconte. 487,847  
 Oiler, oil, L. L. Green. 487,732  
 Order holder, H. E. Donald, Jr. 487,716  
 Organ, J. Chilleen. 487,716  
 Organs, pneumatic action for, J. Peloubet. 487,707  
 Oven plate, I. Brooke. 487,911  
 Paper bags, manufacture of, J. West. 487,862  
 Paper box, J. E. Burke. 488,059  
 Paper box machine, C. E. Powell. 488,129  
 Paper cutter, roll, W. S. Mendenhall. 487,739  
 Paper cutting machine, Horne & Barrett. 488,006  
 Paper feeding machine, F. Hart. 488,006  
 Paper pulp, machine for making tubes from, E. Metzger. 488,149  
 Pattern, adjustable, B. Muss. 487,780  
 Penholder, duplex, Green & Haley. 488,119  
 Pen rack, I. W. Housser. 488,009  
 Pens, lead pencil attachment for fountain, J. R. Townsend. 487,799  
 Photographic printing apparatus and process, U. S. Kuntz. 487,937  
 Picker. See Fruit picker.  
 Picture exhibitor, D. J. Rogers. 488,134  
 Picture exhibitor, A. Svenson. 488,042  
 Pile of velvets, etc., knife for cutting, J. H. Smith. 487,974  
 Pile or fence post, W. L. George. 487,920  
 Pipe coupling, W. R. England. 487,829  
 Planter attachment, corn or cotton, S. J. Adkins. 487,941  
 Planter, hand corn, I. Mackey. 487,849  
 Plow, Z. R. Kea. 487,749  
 Plow and seeder, combined, H. Semmerfeld. 487,871  
 Plow ditching, F. T. Montgomery. 488,133  
 Pole tip, carriage, E. W. Rider. 487,785  
 Polishing machine, C. Seymour. 487,785  
 Post. See Fence post. Hitching post.  
 Power, means for transmitting, W. E. Walsh. 487,805  
 Power, system of electrical transmission of, N. Test. 487,796  
 Press. See Brick press. Drop press. Soap press.  
 Stamping press.  
 Printer's chase, J. S. Brown. 487,710  
 Printing cylinder plate holder, J. J. Clause. 487,992  
 Printing machine feeding apparatus, C. B. Cottrell. 487,914  
 Printing press, ink roller, R. W. Murphy. 487,759  
 Puller. See Stump puller.  
 Pulp screen, J. J. Flanders. 488,166  
 Pulp screening machine, C. J. Foster. 488,067  
 Punch, check, E. G. Bates. 488,162  
 Punch, keyboard, E. Hollerith. 487,738  
 Puzzle, E. L. Thurston. 487,797  
 Pyrotechnic device, G. J. M. Ashby. 487,889  
 Radiator, C. C. Mulford. 487,880  
 Rail, contact, F. E. Kinsman. 487,752  
 Railway conduit, electric, J. W. Hayden. 487,735  
 Railway double track elevator, E. M. Turner. 488,157  
 Railway elevated, E. M. Turner. 488,154  
 Railway frog, J. S. McDams. 487,957  
 Railway signaling device, Z. Krulis. 487,904  
 Railway switch, B. Bennett. 487,705  
 Railway switch, D. M. Church. 488,161  
 Railway switch stand and distant signal, W. W. Le Grande. 487,877  
 Railway tie, metallic, A. J. Hartford. 487,733  
 Railway tie, metallic, A. Mattijetz. 487,952  
 Railway trolley, electric, D. Mason. 488,022  
 Railway trolley, electric, A. Worner. 487,811  
 Railroad stop, J. W. De Graff. 487,826  
 Reclining chair, E. L. Galloway. 487,919  
 Reel. See Bolt reel.  
 Refrigerating machine, L. Block. 487,706  
 Register. See Autographic register. Cash register. Fare register. Gas meter register.  
 Regulator. See Automatic regulator. Dental regulator.  
 Ring holder, G. W. Thompson. 487,975  
 Road making and repairing machine, M. G. Bunell. 488,112  
 Roller and roller bearing, G. A. Weber. 487,884  
 Roller brake, H. C. Finkler. 488,066  
 Rolling machine, metal, J. P. Johnson. 488,049  
 Ropeway clip, wire, B. McIntire. 488,085  
 Safety switch, R. T. Murphy. 487,712  
 Sash cord guide, C. M. Burgess. 487,812  
 Sash cord guide, C. Wolcott. 487,812  
 Sash holder, F. Motley. 487,834  
 Sawing machine, circular, J. H. Gateley. 487,738  
 Scale pole, computing, J. W. Culmer. 487,824  
 Scissors sharpener, E. A. Thissell. 488,043  
 Screen. See Pulp screen.  
 Screw driver, T. J. Jr., & J. J. Edwards. 487,946  
 Seaming the heads upon cans, device for, E. Norton. 487,764  
 Seat. See Folding seat.  
 Seed drill, R. P. Howard. 488,072  
 Seed hopper feed device, T. R. Crane. 487,720  
 Separator. See Dental separator. Liquid separator. Magnetic separator.

Sewing machine, button hole, J. Reece. 488,028  
 Sewing machine lap seam guide, A. Iversen. 488,073  
 Sewing machine shuttle cop holder, Wilkinson & Palmer. 487,910  
 Sewing on buttons, machine for, P. Schoen. 487,972  
 Shade fixture, window, Carthy & Flynn. 487,714  
 Shade holder, L. Spitzer. 487,858  
 Shaft, support, vehicle, C. H. Ellis. 488,000  
 Sheet, portable, or grain, T. J. Kelley. 487,927  
 Shm. metal plate for tinning and its manufacture, E. Norton. 488,151  
 Shm and railway rail joint, metal, W. F. Gould. 487,832  
 Sign horn, C. E. Vail. 487,860  
 Sign bracket and frame, combined, F. E. Schoenherk. 488,092  
 Signal. See Multiple switchboard signal.  
 Sled roller attachment, T. Chittick. 487,990  
 Sliding gate, W. Aunspruch. 488,105  
 Smoke arrester and conductor, F. C. Lechner. 487,949  
 Smoke consuming furnace, G. L. Cross. 487,823  
 Snap hook, S. Brown. 487,880  
 Snap block, S. Haver. 487,734  
 Soap press, automatic, O. W. Band. 487,818  
 Soda distributor, caustic, W. S. Fickett. 487,729  
 Speed indicator, W. H. Abbott. 487,702  
 Spinning machine yarn separator, C. A. Taft. 488,136  
 Spoke socket, A. C. Bushee. 488,113  
 Spring. See Bed spring.  
 Spring, W. I. Bunker. 488,060  
 Spring jack switch, Scribner & Warner. 488,033  
 Spring motor, W. C. Johnston. 487,745  
 Sprinkler. See Street sprinkler.  
 Street sweeper, guide for use in gaining, R. Martin. 487,989  
 Stamping press, C. B. Foote. 487,073  
 Steam boiler, sectional, D. S. Richardson. 487,774  
 Steam generator, T. L. & T. J. Sturtevant. 487,792  
 Street crossing, G. W. Doolittle. 488,117  
 Street sprinkler, Walshe & Sallenger. 487,894  
 Street sweeper, C. H. La Due. 487,754  
 Stump puller, A. C. French. 488,001  
 Supporter. See Garment supporter.  
 Supporting frame, sectional, J. Ormerod. 487,765  
 Suspenders, E. F. Moore. 487,758  
 Switch. See Automatic switch. Railway switch. Safety switch. Spring jack switch. Tramway switch.  
 Switch rail rods or braces, straightener for, P. McCann. 487,958  
 Syringe, urethral, E. P. Roche. 488,089  
 Tank. See Flushing tank.  
 Tank heater, stock, C. A. Weed. 487,806  
 Telegraph, printing, C. Buckingham. 487,986  
 Telegraph, synchronous multiple, C. L. Buckingham. 487,984  
 Telephone exchanges, multiple switchboard system for, C. E. Scribner. 488,038  
 Telephone switchboard apparatus, C. E. Scribner. 488,037  
 Tempering furnace, W. H. Dayton. 487,944  
 Tennis marker, W. M. Lindsay. 487,951  
 Tenon, metallic, A. M. & R. J. Sanders. 487,778  
 Thermostatic vessel, H. Carmichael. 487,713  
 Tilt support, D. B. Morgan. 488,130  
 Tile. See Railway tie.  
 Tile, illuminating, J. Jacobs. 488,122  
 Tile, sheet metal, J. White (r). 11,294  
 Tin plate or metallic sheets, cleaning, E. Norton. 487,763  
 Tire, pneumatic, S. Elliott. 487,874  
 Tire tightener, J. P. Ross. 487,777  
 Tire vehicle, W. I. Bunker. 487,917  
 Torpedo lighter, C. F. Edgar. 487,917  
 Tower, W. E. Caldwell. 487,902  
 Toy savings bank, automatic, D. R. Reynolds. 487,773  
 Tramway switch, J. H. Reinhardt. 488,132  
 Trap. See Animal trap.  
 Trolley, C. Koelner. 487,753  
 Trolley catcher, Werling & Agnew. 487,808  
 Trough. See Hog trough.  
 Truck, brick, C. H. Horton. 487,835  
 Truck car, W. N. Haring. 487,923  
 Truck car, M. G. Hubbard. 487,740  
 Tubular boiler, vertical, T. L. & T. J. Sturtevant. 487,794  
 Tug, ship, J. F. Lesch. 487,950  
 Tug, hull, A. C. Marshall. 488,021  
 Turret head, F. Stolzenberg. 488,152  
 Type case stand, G. B. Miles. 487,932  
 Type writer letter copier, J. T. Davis. 488,143  
 Type writing machine, C. H. McClellan. 487,761  
 Type writing machine, W. W. Walker. 487,901  
 Type writing machine, J. E. Wilson. 487,897  
 Valve and muffler, safety, A. Lohbiller. 488,020  
 Valve, balanced slide, Parker & Clark. 487,962  
 Valve, hydrant, S. W. Lewis. 488,079  
 Valve, piston, W. M. Smith. 488,086  
 Valve, radial, G. Blackman. 487,901  
 Valve, relief, C. Callahan. 487,991  
 Valve safety, J. G. White. 487,809  
 Vehicle attachment, W. E. Miller. 488,063  
 Vent for casks, automatic air, E. R. Buhrman. 488,160  
 Vagon body, I. A. Manchester. 488,081  
 Warp and making same, B. Moore. 488,024  
 Warp threads, machine for drawing in, L. P. Sherman. 487,938  
 Washer. See Bottle washer.  
 Washing machine, Schuster & Schneider. 488,094  
 Watch alarm attachment, G. J. Capewell. 488,062  
 Watchmaker's tool, G. W. Cameron. 487,983  
 Watchmaker's tool, U. W. Frink. 488,069  
 Watch movement box, C. H. Smith. 488,097  
 Water gate, automatic, G. W. Norton. 487,961  
 Water wheel, J. W. & F. M. Bookwater. 488,066  
 Water wheel, turbine, W. W. Rossman. 488,029  
 Well drilling apparatus, De La Mare & Meckham. 488,116  
 Well drilling tool, T. G. Chapman. 487,989  
 Wheel, fifth wheel. Fortune wheel. Water wheel.  
 Whip socket, F. A. Ames. 487,814  
 Whip socket, F. E. Benton. 488,109  
 Windmill, W. P. Kimbrell. 487,750  
 Windmill, Opperd & Brorby. 488,087  
 Windmill tower, Smith & Wead. 487,787  
 Window chair, F. Staedell. 487,859  
 Window cleaner, A. R. Kolb. 487,888  
 Wire binding machine, Lamb & Campbell. 487,844  
 Wire netting, B. Scaries. 488,032  
 Wrench. See Nut or pipe wrench.  
 Wrench, D. C. Wiest. 488,158  
 Wringer. See Mop wringer.  
 Yarn from scutched flax, manufacturing, J. V. Eves. 487,875

## DESIGNS.

Bicyclist's bag, S. B. Gilhuly. 22,057  
 Bottle, F. S. & F. B. Rockwood. 22,058  
 Watch case, J. C. Dueber. 22,056

## TRADE MARKS.


Baking powder, A. W. Ruhl. 22,165  
 Baking powder, T. Palmer. 22,166  
 Beer,lager, Ruff Brewing Company. 22,170  
 Boils, rats, rivets, and screws, J. H. Sternbergh & Son. 22,177  
 Boots and shoes, Munroes, Packard & Lincoott. 22,157  
 Bottles, A. G. Smalley. 22,156  
 Butter and cheese, F. M. Peck. 22,168  
 Calendars and paper weights, A. D. Palmer. 22,152  
 Fuel, certain chemically prepared, American Safety Fuel Company. 22,160  
 Linings embracing silesia, sateens, cambrics, and twills, Burton Bros. & Co. 22,158  
 Meats, salted and pickled, Ferraz Sobrinho & Co. 22,169  
 Medicated beverages or tonics, Quirye Company. 22,172  
 O. A. rolled, W. Johnston. 22,167  
 Oil and grease lubricating, Bogie Brothers. 22,159  
 Pens, fountain, W. A. Leary. 22,151  
 Petroleum, Ferraz Sobrinho & Co. 22,161  
 Photographic developers, Actien-Gesellschaft Fur Anilin Fabrikation. 22,153  
 Planos, Siegel Cooper & Company. 22,176  
 Remedies for prevention of diseases caused by infectious air, J. Schuch & Co. 22,173  
 Remedies for rheumatism and gout, E. Z. Brievo-gelle. 22,178  
 Remedy for acute and chronic inflammation, A. J. Pidgeon. 22,174  
 Remedy for rheumatism, E. S. Powers. 22,175  
 Saccharate similar to saccharine, Lehn & Fink. 22,171  
 Saponaceous compound for cleansing carpets and for laundry purposes, J. S. Silver. 22,162  
 Soap for laundry and household use, Maple City Soap Works. 22,163  
 Soap, laundry, and Manufacturing Company. 22,164  
 Vaporizers, volatilizers, and inhalers, C. L. Coulter. 22,155

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1883, will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of \$40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

## Advertisements.

Inside Page, each insertion - - 75 cents a line  
 Back Page, each insertion - - - \$1.00 a line  
 The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.



"Star" Foot Lathe Swings 9x25 in.  
**LATHE**  
 Scroll Saws, Circular Saws, Lathes, Mortisers.  
 Catalogue Free of all our Machinery.

Seneca Falls Mfg. Co. 695 Water St., Seneca Falls, N.Y.


## The Sebastian-May Co.

Improved Screw Cutting

## Foot &amp; Power LATHES

Drill Presses, Chucks, Drills, Dors, and Muchists' and Amateurs' Outfits. Lathes on trial. Catalogues mailed on application.

165 to 167 Highland Ave., SIDNEY, OHIO.



## Improved Screw Cutting

Foot and Power

## LATHES



**HUNTER'S SIFTER & MIXER**

The best in use for Sifting and Mixing Baking powder, Flour, Drugs, Plasters, Fertilizers, and all kinds of Powders. Ten sizes; 10 lbs. to 10 barrels.


Send for catalogue of all kinds of Mixing Machinery.  
**J. H. DAY & CO.,**  
Cincinnati, Ohio.  
Branch Office, 35 Murray St., New York.

**WEBER GAS AND GASOLINE ENGINE**


Simplest and most economical engines on earth.

**Fully Guaranteed.**

A boy starts it, requires only a few minutes' attention a day. Guaranteed cost of running 1 ct per hour per H. P. Write for catalogue, Address Drawer 200, Weber Gasoline Engine Co., KANSAS CITY, MO.



**INVENTORS** and Experimenters can obtain valuable assistance from us in perfecting their ideas. Models and patterns a specialty. Write us. **WM. GARDAM & SON,** 98 John St., New York.

**NICKEL AND ELECTRO-PLATING**

Apparatus and Material.

**Hanson & Van Winkle Co.**  
Newark, N. J.  
81 LIBERTY ST., N. Y.  
23 S. CANAL STREET, CHICAGO.

**KENNEDY VALVE MFG. CO.**

52 CLIFF ST., NEW YORK.

MANUFACTURERS OF

Gate Valves, Fire Hydrants, etc., etc.

Write for catalogue "B," and lowest discounts.  
The Kennedy Valves are always the Best.

**FLOURING MILL MACHINERY.**

BUILT BY CONTRACT.

ROLLER OR BUHR SYSTEM

**FRENCH BUHR MILLS**

28 SIZES AND STYLES

OVER 20,000 IN USE. A BOY

CAN OPERATE.

A COMPLETE MILL

AND SHELTER LESS

THAN \$100. REDUCED

PRICES FOR SEASON

OF 1893. EVERY MILL

WARRANTED. BOOKS, MILLS

AND SAMPLES. MEAL FREE.

**NORDYKE & MARMON CO.**

14 YORK ST. INDIANAPOLIS IND. U.S.A.

**TO BUSINESS MEN**

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. This he has when he advertises in the SCIENTIFIC AMERICAN. And do not let the advertising agent influence you to substitute some other paper for the SCIENTIFIC AMERICAN, when selecting a list of publications in which you decide it is for your interest to advertise. This is frequently done for the reason that the agent gets a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.

For rates see top of first column of this page or address **MUNN & CO., Publishers,**

361 Broadway, New York.

**The Cheapest, The Best**

A complete Electric Motor and Battery Outfit, instructive and entertaining for old and young, operating by means of our patented battery pads, doing away with liquid acids and chemicals. Sent by mail or express, prepaid, on receipt of \$1.25. Electro-Novelty Co., Roxbury, Mass., Mfrs. of Toy Motors, Amateur Electro-Plating Outfits, etc. Send for catalogue. See "Sci. Am." July 23d

**FOR SALE. TEN MILES, More or Less,**

of Spiral Weld Pipe, 8-inch, I. D., tested to 250 lbs. pressure, coated with the usual coal tar composition; couplings for lead joints, pipe lengths, 16 ft. to 18 ft.; weight of pipe, 6 lb. per ft. Tender will be received for this pipe f. o. b. Chicago, where it may be seen if desired.

Address all communications to  
**J. E. McELROY,**  
287 Wabash Avenue, Chicago.



**TRENTON IRON CO.**

TRENTON N. J.

**STEEL MUSIC WIRE**

EQUAL TO THE BEST IMPORTED


NEW YORK

**COOPER, HEWITT & CO.**

MUD: A MATERIAL IN PERSIAN


and Eastern Architecture.—By William Simpson, R.I.

M.R.A.S. An interesting London Society of Arts lecture on the mud-built structures of the East. With 7 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 865. Price 10 cents. To be had at this office and from all newsdealers.

**CHANDLER'S Micrometer Holder**

It allows the hand to be free to use the adjusting screw while the other holds the work. Price 50 cents.

**CHANDLER & FARQUHAR**  
No. 179 Washington Street,  
BOSTON, MASS.  
Send for Catalogue of Tools.



**FOOT LATHES, BENCH SHEARS**

ENERGIZED HAMMERS

BENCH DRILLS

ROLLING MILLS



**W. W. OLIVER**

BUFFALO, N. Y.

**PATENT PETROLEUM MOTORS**

STATIONARY AND PORTABLE. (NO BENZINE.)

The most Reliable, Compact, and Economical Motor for all Industrial Purposes.



No Soot, No Smoke, No Coal, No Engineer.

We also manufacture IMPROVED GAS ENGINES.

Our Motors will be exhibited at Columbian Exposition, Chicago, in Section F, No. 744.

Send for illustrated Catalogue and Price List, Free.

**J. M. GROB & CO., Mfrs., LEIPZIG - EUTRITZSCH (GERMANY).**

**USE SYKES Improved Iron and Steel ROOFING.**

For all classes of buildings, easily applied, cheaper than shingles, will last a lifetime, and is absolutely fire and lightning proof. Reduces your insurance and is the best roof manufactured. Write for our handsome catalogue and mention this paper.

**SYKES IRON & STEEL ROOFING CO.,**  
Chicago, Ill., or Niles, Ohio.




**ALANSON CARY**

MANUFACTURER OF STEEL SPRINGS

OF EVERY DESCRIPTION


240 & 242 W. 29TH ST. NEW-YORK



Don't buy the old style vise when you can get with **Strange's Pat. Combination Vise & Drill**, have so many tools in one. Sold now by Hardware dealers. For circulars and price address **Strange's Machine Works, Taunton, Mass.**


**PLAYS-PLAYS**  
For Amateur Theatricals, Temperance Plays, Drawing-Room Plays, Fairy Plays, Ethiopian Plays, Guide Books, Speakers, Pantomimes, Charades, Jarley's Wax Works, Burnt Cork, Theatrical Face Preparations, Wire Boards, Moustaches, and Paper Scenery. New Catalogues, containing many novelties, full description and prices sent FREE! FREE!  
**T. H. FRENCH, 28 West 23d St., N. Y.**

**Steel Type for Writing Machines,**  
**J. D. MALLONEE, Mfr., STOCKTON, N. Y.**



**AMERICAN WATCH TOOL CO.**

Waltham, Mass.



**WRIGLEY'S EMERY DRESSER**  
\$2.50 EACH  
A TOOL FOR GENERAL WORK  
CUTTERS (15 PER SET) NEVER GETS DULL.  
CUTS GROOVES AND FACES RAPIDLY. SEND FOR CIRCULAR  
THOS. WRIGLEY 85 5TH AVE. CHICAGO ILLS.

**MECHANICS' TOOLS.**

If you are interested in Tools as a manufacturer or amateur, you should have a copy of our new catalogue. Our 1892 edition is a very elaborate and complete book of 704 pages, handsomely bound in cloth. The book will be sent to any part of the world, prepaid, on receipt of \$1.00, and the money thus paid will be refunded with the first purchase amounting to \$10.00 or over. Every manufacturer and amateur should have this catalogue, even if they do not intend buying their Tools and Supplies of us.  
**MONTGOMERY & CO., Fine Tools,**  
105 Fulton Street, New York City, N. Y.

**The AUTOGRAPHIC REGISTER.**

A Labor-Saving Business System Enforcing Honesty and Accuracy

**Chicago Autographic Register Co.**  
148 to 154 Monroe St.  
CHICAGO, ILL.  
Send for catalogue & price list.

**The Shimer Cutter Heads**

45,000 SOLD.

To work Car Siding, Flooring, Ceiling and Ship Lap; to Mould Doors, Sash and Blinds. Cope Heads to match. **Shimer & Sons,** Centre St., Milton, Pa.

**LATEST IMPROVEMENTS.**

NEW STYLE.

NEW PRICES.

GROWING RAPIDLY in FAVOR

**PERFORATORS OF ALL METALS**

For Cotton, Oil and Rice Mills, Sugar Houses, Distilleries, Phosphate and Fertilizer Works, Mining and Concentrating, Gas and Water Works, Elevators, Separators, Corn Shellers, and all kinds of Grain Cleaning Machinery. Heavy steel and Iron Plates and Cylinders for Screening Ore, Coal, Stone. For Filters, Strainers, Ventilators, Oil, Gas and Vapor Stoves and all special purposes. Special sizes for Coffee Cleaning and Roasting Machinery. Perforated Tin and Brass.

**The Harrington & King Perforating Co., Chicago, and 284 Pearl St., N. Y.**

**THE GLOBE AUTOMATIC INJECTOR**

The Latest and Best

**BOILER FEEDER**

Restarting,

Simple,

Positive.

**Eagle Lubricator Co.,**  
108 Canal Street,  
CLEVELAND, O.

**NOTICE.**

All owners or inventors of smoke-consuming device are hereby notified that, if they have anything which will prevent the making of smoke in connection with the burning of soft coal, or consume the smoke if made, and will bring the same to our notice, their claims will be thoroughly investigated by the committee appointed at a meeting of soft coal consumers of Boston. All communications, accompanied by blue prints or drawings, showing in a clear manner the device proposed, should be addressed to **F. A. GILBERT, Chairman, No. 77 Ames Building, Boston, Mass.**

**Canning Machinery**

Outfits Complete.  
Oil Burners for Soldering, Air Pumps, Can Wipers, Can Testers, Labeling Machines, PRESSES AND DIES.  
**BURT MFG. CO.,**  
ROCHESTER, N. Y.

**CLARIFICATION OF SUGAR CANE**  
Juices.—By E. W. Deeming. Description of a new process of clarification which contemplates filtering continuously all the juices by wholly dispensing with the use of open clarifiers or tanks. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 863. Price 10 cents. To be had at this office and from all newsdealers.




**MARINER & HOSKINS**

**ASSAYERS & CHEMISTS**

31 CLARK STREET, CHICAGO

SAMPLES BY MAIL OR EXPRESS

**THE TRIPLE ACTING POWER**

**BOILER FEED & FORCE PUMP.**

THREE PISTONS STEADIEST DELIVERY

CUT GEARS METAL VALVES

**WM. BARAGWANATH & SON**

46 W. DIVISION ST.

SEND FOR CIRCULAR. CHICAGO.

**CLARK'S**

WOOL WASHERS,  
WARP DYEING AND SIZING MACHINES,  
PATENT RUBBER COVERED SQUEEZE ROLLS,  
POWER WRINGERS FOR HOSIERY AND VARN DYEING,  
DRYING AND VENTILATING FANS,  
WOOL AND COTTON DRYERS, Etc.  
Catalogues free.

**GEO. P. CLARK**

Box L. Windsor Locks, Conn.



**FREE**

A fine 14k gold plated watch

with every reader of this paper.

Cut this out and send it to us

with your full name and address,

and we will send you one of these elegant richly

jeweled gold finished watches

by express for examination,

and if you think it is equal in

appearance to any \$25.00 gold

watch, pay our sample price,

\$4.50, and it is yours. We send

with the watch our guarantee

that you can return it at any

time within one year if not

satisfactory, and if you sell

or cause the sale of six we

will give you \$25.00. Write

at once as we shall send out

samples for sixty days only.

**THE NATIONAL MFG**

**& IMPORTING CO.**

334 Dearborn Street,

CHICAGO, ILL.

**BEEMAN'S PEPSIN GUM**

THE PERFECTION OF CHEWING GUM.

A DELICIOUS

**REMEDY**

FOR ALL FORMS OF


**INDIGESTION.**

1-3 of an ounce of Pure Pepsin mailed on receipt of 25c.

CAUTION—See that the name Beeman is on each wrapper.



Each tablet contains one grain pure pepsin, sufficient to digest 1,000 grains of food. If it cannot be obtained from dealers, send five cents in stamps for sample package to  
**BEEMAN CHEMICAL CO., 70 Lake St., Cleveland, O.**  
ORIGINATORS OF PEPSIN CHEWING GUM.

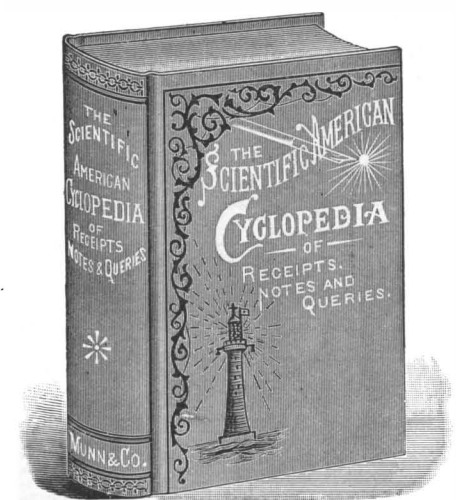**NOW READY! A NEW AND VALUABLE BOOK.**

12,000 Receipts. 680 Pages. Price \$5.

This splendid work contains a careful compilation of the most useful Receipts and Replies given in the Notes and Queries of correspondents as published in the SCIENTIFIC AMERICAN during the past fifty years; together with many valuable and important additions.

Over Twelve Thousand selected receipts are here collected; nearly every branch of the useful arts being represented. It is by far the most comprehensive volume of the kind ever placed before the public.

The work may be regarded as the product of the studies and practical experience of the ablest chemists and workers in all parts of the world; the information given being of the highest value, arranged and condensed in concise form convenient for ready use.

Almost every inquiry that can be thought of, relating to formulae used in the various manufacturing industries, will here be found answered. Instructions for working many different processes in the arts are given.

It is impossible within the limits of a prospectus to give more than an outline of a few features of so extensive a work.

Under the head of Paper we have nearly 250 receipts, embracing how to make papier maché; how to make paper water proof and fire proof; how to make sandpaper, emery paper, tracing paper, transfer paper, carbon paper, parchment paper, colored papers, razor strop paper, paper for doing up cutlery, silverware; how to make luminous paper, photograph papers, etc.

Under the head of Inks we have nearly 450 receipts, including the finest and best writing inks of all colors, drawing inks, luminous inks, invisible inks, gold, silver and bronze inks, white inks; directions for removal of inks; restoration of faded inks, etc.

Under the head of Alloys over 700 receipts are given, covering a vast amount of valuable information.

Of Cements we have some 600 receipts, which include almost every known adhesive preparation, and the modes of use.

How to make Rubber Stamps forms the subject of a most valuable practical article, in which the complete process is described in such clear and explicit terms that any intelligent person may readily learn the art.

For Lacquers there are 120 receipts; Electro-Metallurgy, 125 receipts; Bronzing, 127 receipts; Photography and Microscopy are represented by 600 receipts.

Under the head of Etching there are 55 receipts, embracing practical directions for the production of engravings and printing plates of drawings.

Paints, Pigments and Varnishes furnish over 800 receipts, and include everything worth knowing on those subjects.

Under the head of Cleansing over 500 receipts are given, the scope being very broad, embracing the removal of spots and stains from all sorts of objects and materials, bleaching of fabrics, cleaning furniture, clothing, glass, leather, metals, and the restoration and preservation of all kinds of objects and materials.

In Cosmetics and Perfumery some 500 receipts are given.

Soaps have nearly 300 receipts. Those who are engaged in any branch of industry probably will find in this book much that is of practical value in their respective callings.

Those who are in search of independent business or employment, relating to the home manufacture of sample articles, will find in it hundreds of most excellent suggestions.

Send for descriptive circular.

**MUNN & CO., Publishers,**

SCIENTIFIC AMERICAN OFFICE,

361 Broadway, New York.

**Have You Exhaust Steam Going to Waste?**

Are your Feed Water Heaters obtaining the best results, in heating and purifying the feed water for your boilers? Are you heating your buildings with live steam or exhaust?

If You Desire to Get Better Results from your present feed water heaters, and to heat your buildings by exhaust steam, without back pressure upon engines, saving power and water of condensation, together with **GREATER ECONOMY IN FUEL**, send for our catalogues of Webster Vacuum Feed Water Heater and Purifier, and Williams Vacuum System of Steam Heating, which contains some of the largest plants in the United States as references.

We visit plants in any part of the United States, at our expense, and furnish our apparatus, which may be attached to your present plant, upon trial, under guarantee.

**WARREN WEBSTER & CO., Managers and Sole Licensees for the Sale of Patent Rights in the United States.**

Main Office and Works, 491 N. 3d St., Philadelphia.


Patentees, Proprietors and Manufacturers of the Webster Vacuum Feed Water Heater and Purifier.

SEND FOR CATALOGUE.



## HE IS DEAD

to his own interest, who deals in Arms and Ammunition, or who shoots a Rifle, Pistol, or Shot Gun, and has not a copy of the **IDEAL HAND BOOK**, No. 32A, 64 pages of solid information. Just out. (Mention **SCIENTIFIC AMERICAN**.)  
**BE ALIVE and send for one FREE.**  
Stamps for postage will not provoke us.  
**Ideal Mfg. Co.** Drawer 860, New Haven, Ct., U.S.A.




### One Man with the No. 1 UNION COMBINATION SAW

can do the work of four men using hand tools, in Rippling, Cutting-off, Mitring, Rabbeting, Grooving, Gaining, Dadoing, Edging-up, Jointing, Stuff, etc. Full Line of Foot and Hand Power Machinery.

Sold on Trial. Catalogue Free.  
**SENECA FALLS MFG. CO.**  
694 Water St., Seneca Falls, N. Y.

## Model & Experimental Work

Small articles manufactured in quantities. Inventions perfected and developed. Working in Aluminum a specialty. **Sylvester H. Denison**, Designer & Builder of Fine Machinery, 143 Centre Street, New York City.



### ENGINE CASTINGS

from 1/2 to 6 horse power, in rough or finished. Upright, Horizontal and Marine. 8 and 16 light Dynamo. Simple and Fan Motor Castings or Finished Machines. Lathe Castings.

Send stamp for new Catalogue.  
**PALMER BROS.,**  
Mianus, Conn.

## INVENTORS' IDEAS put into practical working shape by MILLIKEN & D'AMOUR.

Cor. JOHN AND DUTCH STREETS, NEW YORK CITY  
Machinists, Pattern and Model Makers.



### LIGHTNING WELL-SINKING MACHINERY MANUFACTURERS.

Hydraulic, Jetting, Revolving, Artesian, Diamond Prospecting Tools, Engines, Bore, Wind Mills, Pumps. Encyclopedia, 1,000 engravings, Earth's Strata, Determination quality water, mailed, 50c. The American Well Works, Aurora, Ill. 11 & 13 S. Canal Chicago, Ill. Dallas, Texas

**VELOCITY OF ICE BOATS.** A Collection of interesting letters to the editor of the **SCIENTIFIC AMERICAN** on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in **SCIENTIFIC AMERICAN SUPPLEMENT**, No. 214. Price 10 cents. To be had at this office and from all newsdealers.




### ARTESIAN

Wells, Oil and Gas Wells, drilled by contract to any depth, from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 1,000 feet. Write us stating exactly what is required and send for illustrated catalogue. Address **PIERCE ARTESIAN & OIL WELL SUPPLY CO.,** 80 BEAVER STREET, NEW YORK.

## FREE SITES TO SUBSTANTIAL MANUFACTURING ENTERPRISES

in the rapidly growing towns of Virginia and West Virginia, possessing CHEAP IRON, CHEAP LUMBER, CHEAP FUEL, and RAILROAD FACILITIES. Address **J. DINGEE**, 333 Walnut Street, Philadelphia, Pa., President and General Manager of numerous Land Companies situated along the lines of the Norfolk & Western Railroad.



### KEUFFEL & ESSER CO.

NEW YORK AND CHICAGO. All Drawing Instruments for Schools. Quality warranted, prices low, correspond. Send for Catalogue.

## HAVE YOU READ Experimental Science?

This new book, by Geo. M. Hopkins, is just what you need to give you a good general knowledge of Physical Science. No one having the spirit of the times can afford to be without the kind of scientific information contained in this book. It is not only instructive, but entertaining.



Over 700 pages; 680 fine cuts; substantially and beautifully bound. Price by mail, \$4.00. Send for illustrated circular.  
**MUNN & CO., Publishers,**  
Office of the **SCIENTIFIC AMERICAN**,  
361 BROADWAY, NEW YORK.

## Warner's Burglar Proof Locks.


The SAFEST, NEATEST, LIGHTEST, yet STRONGEST LOCK for HOUSE DOORS ever manufactured.

Packed in box with two keys and screws, **50 Cents.** Made of Steel and ABSOLUTELY Burglar Proof.

### Warner Lock Co.

Manhattan Building,

CHICAGO, ILL.




### SPECIAL MACHINERY for SHINGLE

Heading and Stave Mills, for Fruit Package, Cheese Box Factories and Veneer Cutting.

Send for catalogue "A."  
**HANDLE MACHINERY**, for Turning Handles for Brooms, Mops, Forks, Hoes, Axes, Picks, Cant Hooks, Spokes, etc. Send for catalogue "B."  
**WOOD PULP MACHINERY.** Send for Cat. "C."

MANUFACTURED BY  
**TREVOR MFG. CO., LOCKPORT, N. Y.**



Patent Heading Turner

### SPECIAL NOTICE!

Two handsome photo-engraved display sheets entitled, "Recent Improvements in Air Compressors," "Recent Improvements in Rock Drills," mailed free to any one who will cut out this advertisement and mail it to us with his name and address.

**INGERSOLL-SERGEANT DRILL CO.**  
No. 10 Park Place, New York, U.S.A.

## ROCK DRILLS AIR COMPRESSORS & MINING TUNNELING. QUARRY & RAILROAD WORK.

**RAND DRILL CO.** 23 PARK PLACE, NEW YORK

## OIL WELL SUPPLY CO.

91 & 92 WATER STREET, PITTSBURGH, PA.

Manufacturers of everything needed for ARTESIAN WELLS


for either Gas, Oil, Water, or Mineral Tests, Boreholes, Engines, Pipe, Cordage, Drilling Tools, etc. Illustrated catalogue, price lists and discount sheets on request.

## THE AURAPHONE

THE DEAF MAY HEAR!

THE AURAPHONE is a new scientific invention of an invisible apparatus to be worn in the ears. It is easily inserted or withdrawn by anyone, and will invariably restore hearing to anyone not stone deaf. It can be tested absolutely free of cost.

**THE AURAPHONE COMPANY,**  
No. 607 Masonic Temple, Chicago, Ill.  
Pamphlet sent for two cent stamp.



### JAMES LEFFEL

## WATER WHEELS

Many Styles and Sizes, Upright and Horizontal.

**30 YEARS CONTINUOUS BUSINESS**

affords every facility for adapting them to all situations, **ELECTRIC, MINING, IRRIGATING & MANUFACTURING.**

Plants of all kinds driven by them. Easy working gates. We guarantee highest power, with smallest quantity of water, at full and part gates; insuring easy regulation and steady motion. Successfully operating under heads of 2 to 400 feet. Write us for fine pamphlet and state your wants.

**THE JAMES LEFFEL & CO.,** 110 LIBERTY ST., NEW YORK CITY.

## ALUMINUM

In all shapes. Manufactured by Cowles Electric Smelting and Aluminum Co., Lockport, N. Y.

## SETS OF CASTINGS OF MODEL ENGINES CATALOGUES FREE. ALSO TOOLS GEAR WHEELS & PARTS OF MODELS GOODNOW & WIGHTMAN

## DELANEY'S Expansion Packings for Steam, Water & Ammonia are best and cheapest. DELANEY'S Metallic Gaskets and Flanges make everlasting joints. H. J. Delaney & Co. Mfrs. Third & Fowler Sts., Milwaukee, Wis.

**TRADES UNIONS. THE TENDENCY** of.—By Herbert Spencer. An able paper, pointing out the great difficulties of dealing with complex social questions. Contained in **SCIENTIFIC AMERICAN SUPPLEMENT**, No. 801. Price 10 cents. To be had at this office and from all newsdealers.

## "ECONOMY IS WEALTH."

Canvassers wanted to sell the New Model Hall Typewriter. Why will people buy a \$100 machine when \$30 will purchase a better one? Send for illustrated catalogue and terms to County Agents. Address **N. TYPEWRITER CO.** 611 Washington Street, Boston, Mass. Mention **Scientific American**.

## DRILL CHUCKS.

Write "THE PRATT CHUCK CO." Clayville, N. Y., U.S.A., for free illustrated catalogue of **POSITIVE DRIVING DRILL CHUCKS**, showing the only perfect system ever devised for holding and driving drills.

Foreign Agencies: Ph. Roux et Cie., 54 Boulevard du Temple, Paris, France. E. Sonnenthal, Jr., Nuev Promenade, No. 5, Berlin, Germany. Selig, Sonnenthal & Co., 85 Queen Victoria Street, London, E. C., England.

## NO SKILLED ENGINEER.

**THE SHIPMAN AUTOMATIC STEAM ENGINE.**

**KEROSENE OIL FUEL.** 1, 2, 4, 6 and 8 HORSE POWER. No extra Insurance. Efficient, Economical, Durable.

**SHIPMAN ENGINE COMPANY,** 200 SUMMER STREET, BOSTON MASS.



A special Stock of **One Million Dollars** Worth of **PIANOS** and **ORGANS** to select from at **Wholesale Cost.**

**ALL OUR HOLIDAY OFFERS NOW AVAILABLE.**

You can get **JUST WHAT YOU WANT** and **Pay WHEN and HOW YOU LIKE.**

Write at once for our new Catalogue. It gives Full Particulars and Prices of all the **Celebrated**

**Cornish Pianos and Organs.**

Sold direct from Factory to Family at Wholesale Cost. Write now to **Cornish & Co., Washington, Jersey.**

NEW

THE BEST LOOSE PULLEY OILER IN THE WORLD.

**VANDUZEN PAT. L. PUL. OILER**

Keeps Pulley oiled 3 to 4 weeks with one filling. Cost 25, 30, 40, 50, 65 and 85 cents each. Send Price and **TRY ONE.** State diameter and speed of Pulley. Will send Catalogue free. Mention this paper. The **VANDUZEN & TIFT CO.** Cincinnati, O., U.S.A.

To Inventors and Owners of Patents.—I wish to correspond with parties owning patented articles in which iron enters largely into their construction, with the view of purchasing or manufacturing on royalty. **S. AYRES FISHER**, Geneseo, Ill.

## STEEL TYPE FOR TYPEWRITERS

Stencils, Steel Stamps, Rubber and Metal Type Wheels, Dies, etc. Model and Experimental Work. Small Machinery, Novelties, etc., manufactured by special contract. New York Stencil Wks. 100 Nassau St., N. Y.

THE

**SCIENTIFIC AMERICAN**

ESTABLISHED 1846.

The Most Popular Scientific Paper in the World

Only \$3.00 a Year, Including Postage.

Weekly—52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete list of patents each week.

**Terms of Subscription.**—One copy of the **SCIENTIFIC AMERICAN** will be sent for one year—52 numbers—postage prepaid, to any subscriber in the United States, Canada, or Mexico, on receipt of three dollars by the publishers; six months, \$1.50; three months, \$1.00.

**Clubs.**—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

**MUNN & CO., 361 Broadway, New York.**

THE

**Scientific American Supplement**

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archaeology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, \$5.00 a year; or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for \$7.00. Single copies, 10 cents. Address and remit by postal order, express money order, or check.

**MUNN & CO., 361 Broadway, New York.**

THE

**Building Edition.**

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming a large and splendid Magazine of Architecture, richly adorned with elegant plates in colors, and with other fine engravings; illustrating the most interesting examples of modern architectural construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Sheets of Details, Estimates, etc.

The elegance and cheapness of this magnificent work have won for it the Largest Circulation of any Architectural publication in the world. Sold by all newsdealers. \$2.50 a year. Remit to

**MUNN & CO., Publishers,**

**361 Broadway, New York.**

BEATTY Pianos, Organs, \$33 up. Want agents. Cat'g free. Dan'l F. Beatty, Wash'ton, N. J.



## NEW AND CHOICE PRACTICAL BOOKS

JUST READY.

**BRANTT.**—The Practical Scourer and Garment Dyer. Comprising Dry or Chemical Cleaning; the Art of Removing Stains; Fine Washing, Bleaching and Dyeing of Hats, Gloves and Feathers of all kinds; Dyeing of Worn Clothes of all Fabrics, including Mixed Goods, by One Dip, and the Manufacture of Soaps and Fluids for Cleansing Purposes. Edited by William T. Brantt. Editor of "The Techno-Chemical Receipt Book." Illustrated. 288 pages, 12mo. Price.....\$2.00

**LIEBER.**—The Assayer's Guide; or, Practical Directions to Assayers, Miners and Smelters for the Tests and Assays, by Heat and by Wet Processes, of the Ores of all the Principal Metals, of Gold and Silver Coins and Alloys, and of Coal, etc. By Oscar M. Lieber. A new, revised and enlarged edition. Illustrated. 288 pages, 12mo. Price.....\$1.50

**DUNCAN.**—The Practical Surveyor's Guide. Containing the necessary information to make any person of common capacity a finished surveyor, without the aid of a teacher. By Andrew Duncan, C. E. New, revised and enlarged edition. Illustrated by 72 engravings. 214 pages, 12mo. Price.....\$1.50

## RECENTLY PUBLISHED.

**DEITE.**—A Practical Treatise on the Manufacture of Perfumery. Comprising Directions for Making all kinds of Perfumes, Substances, Powders, Fragrants, Materials, Dentifrices, Cosmetics, etc., etc.; with a full account of the Volatile Oils, Balsams, Resins, and other Natural and Artificial Perfume Substances, including the Manufacture of Fruit Ethers, and Tests of their Purity. By Dr. C. Deite, assisted by L. Borchert, P. Eichbaum, H. Kugler, H. other. H. other. H. other. From the German by William T. Brantt. 288 engravings. 12mo, 388 pages. Price.....\$3.00

**LANGBEIN.**—A Complete Treatise on the Electro-Deposition of Metals. Comprising Electro-Plating and Galvanoplastic Operations, the Deposition of Metals by the Contact and Immersion Processes, the Coloring of Metals, the Methods of Grinding and Polishing, as well as Descriptions of the Electric Elements, Dynamo-Electric Machines, Thermopiles, and of the Materials and Processes used in every Department of the Art. From the German of Dr. George Langbein. By William T. Brantt. 125 engravings. 8vo, 404 pages. Price.....\$4.00

**LARKIN.**—The Practical Brass and Iron Founder's Guide. A Treatise on Brass Founding, Moulding, the Metals and their Alloys, etc. A new, revised, and greatly enlarged edition. Illustrated. 12mo, 400 pages. Price.....\$2.50

**LEHNER.**—The Manufacture of Ink. Comprising the Raw Materials, and the Preparation of Writing, Copying and Hektograph Inks, Safety Inks, Ink Extracts and Powders, Colored Inks, Solid Inks, Lithographic Inks and Crayons, Printing Ink, Ink or Aniline Pencils, Marking Inks, Special Inks, etc., etc. From the German of Sigmund Lehner, Chemist and Manufacturer, by William T. Brantt. 12mo, 230 pages. Price.....\$2.00

**OSBORN.**—The Prospector's Field Book and Guide in the Search for and the Easy Determination of Ores and other Useful Minerals. By Prof. H. S. Osborn, LL.D., author of "A Practical Manual of Minerals, Mines and Mining." 44 engravings. 12mo, 175 pages. Price.....\$1.50

**WAHNSCHAFTE.**—A Guide to the Scientific Examination of Soils. Comprising Select Methods of Mechanical and Chemical Analysis and Physical Investigation. From the German of Dr. Felix Wahnschafte. With additions by William T. Brantt. 25 engravings. 12mo, 177 pages. Price.....\$1.50

**BRANTT-WAHL.**—The Techno-Chemical Receipt Book. Containing several thousand Receipts covering the Latest, most important, and most useful Discoveries in Chemical Technology, and their Practical Application in the Arts and Industries. Edited by William T. Brantt and W. H. Wahl, Ph.D. 78 engravings. 485 pages, 12mo. Price.....\$2.00

**BRANTT.**—The Metal Worker's Handy Book of Receipts and Processes. 68 engravings. 536 pages. 12mo. Price.....\$2.50

**BLINN.**—A Practical Workshop Companion for Tin, Sheet-Iron and Copper-Plate Workers. Containing rules for describing various kinds of Patterns used by Tin, Sheet-Iron and Copper-Plate Workers. Practical Geometry; Mensuration of Surfaces and Solids; Tables of the Weights and Strengths of Metals and other Materials; Tables of Areas and Circumferences of Circles; Composition of Metallic Alloys; Solders with numerous valuable Receipts and Manipulations for every-day use in the workshop. By Leroy J. Blinn, Master Mechanic. A new, revised, and enlarged edition, printed from new type, and with 170 newly engraved illustrations. 236 pages. 12mo. Price.....\$2.50

**VAN CLEVE-EDWARDS.**—The English and American Handy Book for the Workshop and the Factory. Containing several thousand Receipts, Rules and Tables, indispensable to the Mechanic, the Artisan and the Manufacturer. By B. Frank Van-Cleve and Emory Edwards, C.E. 85 engravings. 500 pages, 12mo. Price.....\$2.00

**EDWARDS.**—800 Examination Questions and Answers for Engineers and Firemen (Land and Marine), who desire to obtain a U. S. Government or State License. By Emory Edwards. Pocket-book form, gilt edges. 128 pages. Price.....\$1.50

**EDWARDS.**—The American Marine Engineer: Theoretical and Practical, with Examples of the Latest and Most Approved Marine Practice. For the use of Marine Engineers and Students. By Emory Edwards. Illustrated by 85 engravings. 440 pages. Price.....\$2.50

**EDWARDS.**—Descriptive circulars, giving the full tables of contents of all the above works, sent free to any one who will apply.

The above or any of our books sent by mail, free of postage, at the publication prices, to any address in the world.

**HENRY CAREY BAIRD & CO.**  
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS  
810 Walnut St., Philadelphia, Pa., U. S. A.

**BARR'S** Book on Steam Boilers, cloth, \$3.00.

"Combustion of Coal," cloth, \$2.50.

are recognized Standard Text Books on these important subjects. New edition. Just ready. Address: H. V. Nostrand & Co., New York, Henry Carey Baird & Co., Philadelphia. Baker-Randolph Co., Publishers, Indianapolis and Chicago.


**STEREOPTICONS.**  
MAGIC LANTERNS AND  
ACCESSORIES. SEND FOR CATALOGUE  
TO CHAS BESELER MAKER 218 CENTRE ST.  
NEW YORK.

## FREE!

A Scientific and Practical Pamphlet on lubrication is sent free to all who wish it. It contains interesting and valuable information.

**JOS. DIXON CRUCIBLE CO.**  
JERSEY CITY, N. J.

**Do Your Own PRINTING.**  
Card Press, \$3. Size for circulars or small newspaper, \$2.25. Saves you money. Full printed instructions. Send stamp for catalogue to the factory.  
**KEISEY & CO.**  
Meriden, Conn.

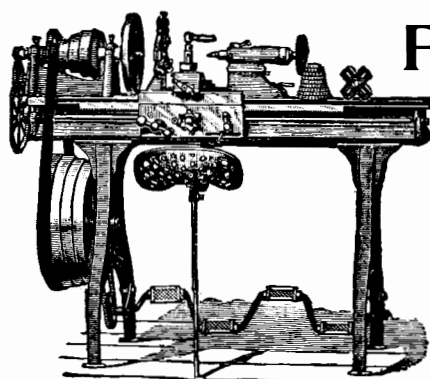

## Foot Power Lathes

For Electrical and Experimental Work.  
For Gunsmiths and Tool Makers.  
For General Machine Shop Work.

High grade Tools; correct in principle, elegant in design, superior in construction. **THE BEST FOOT-POWER LATHES MADE.** Send for catalogue and prices.

**W. F. & JOHN BARNES CO.,**  
999 Ruby St., ROCKFORD, ILLS.

## LAW BATTERY COMPANY,

85 John St., New York.

MAKERS OF THE

LAW BATTERY

FOR

Telephones, Bells, Physicians' Use,

The Law Bailey Current Controller,


Law Du Bois Raymond Faradic Coil,

Law D'Arsonval Milliammeter,

Law Electro-Medical Office Outfits,

and a general line of Battery Supplies

Catalogue "H" just out. Send for it.



**A MARVEL OF POWER, SIMPLICITY  
AND LOW COST.**

Always ready. No Boiler. No Fire. No  
Engineer. No License. No Danger.  
Stationary, Marine and Portable Engines  
for Boats, Pumps, Factories, etc., from  
1-12 to 10 H. P. Send for Catalogue.

SAFETY VAPOR ENGINE CO.,

16 MURRAY STREET, - NEW YORK

## PHOTO-SMOKE CIGAR CAMERA.

Most wonderful novelty of the day. Takes your picture while you smoke. Agents wanted in all parts of the world. Sample, terms, etc., 25c. Described in SCIENTIFIC AMERICAN, June 4, 1892.

**AUTOMATIC TRUMPET.**—Any tune played on it by simply working a lever. No experience necessary, a child can play it as well as the most expert musician. Price 75c. See SCIENTIFIC AMERICAN, Oct. 15, 1892. Parisian Novelty Co., 64 College Place, N. Y.


**MALLEABLE** AND FINE GRAY IRON ALSO STEEL  
CASTINGS FROM SPECIAL  
PATTERNS  
THOMAS DEVLIN & CO. FINE TUNING JAPANNING AND  
LEHIGH AVE. & AMERICAN ST. PHILA.

## CHUCKS.

Catalogue No. 12, just issued  
with over 40 new illustrations  
sent free. Address  
The Cushman Chuck Co., Hartford, Conn.

## THE PRATT &amp; WHITNEY CO.

HARTFORD, CONN., U. S. A.



Manufacture machinery for general and special service in the manufacture of Electrical Apparatus, Typewriters, Bicycles, Firearms, Sewing Machines and parts thereof.

Lathes, Planers, Shapers, Milling, Drilling, Profiling, Threading, Drop Forging, and Die Sinking Machines.

Shaft Centering, Shaft Drilling, Flour Mill Roll Grooving, Metal Band Sawing and Brass Finishing Machinery, Automatic Grain Scales. Taps, Dies, Reamers, Gauges, Milling Cutters, Renshaw Ratchet Drills, Combination Lathe Chucks, Boiler Plate Punches.

ASK FOR CATALOGUE A.

## ENVELOPES

PRINTED, GUMMED, FOLDED, ALL AT ONCE,  
HENCE, LOWEST PRICES.  
Pay and Catalogue Envelopes, All Sizes.  
C. W. R. SMITH, Manuf'g Agent, 31 S 6th St., PHILA., PA.  
Daily capacity, Two Million.



For THE 1893  
AMERICAN ANNUAL of PHOTOGRAPHY  
AND  
PHOTOGRAPHIC TIMES ALMANAC  
FOR 1893 IS NOW READY.

It contains Thirty (30) full page Pictures; over two hundred (200) pages of (Contributed) Articles especially written for this volume by the best equipped photographers and photographic writers in two hemispheres; New Tables, New Formulas and New Methods; Revised List of Photographic Societies; Record of Patents; New Books, and, in short, everything relating to Photography. Filling more than five hundred pages in all.

An indispensable Handbook for the Photographer, young or old, amateur or professional. The first edition is 18,000 copies. This is an unprecedented demand for a photographic work, but the book itself is unprecedented in the annals of Photography!

The price remains the same.

Paper Covers. - - - - \$0.50

Cloth Bound (Library Edition). - - - - 1.00


Postage is 15 cents extra.

Putting it within the reach of all.

THE SCOVILL & ADAMS COMPANY, Publishers,

(Publication Department.)

423 BROOME STREET, NEW YORK.

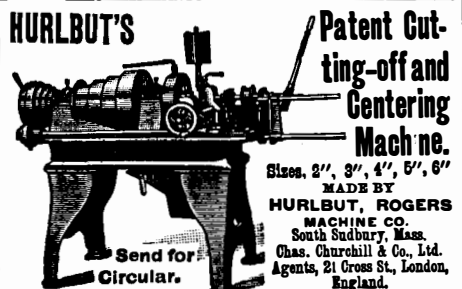

## LECTURERS

and all using the OPTICAL LANTERN, should be aware that with our

## MULTIFOCAL ATTACHMENT

they require but one medium power objective to make any size picture required, at any distance from the screen.

Satisfaction guaranteed. Send for circular to

**J. W. QUEEN & CO., Philadelphia, Pa.**



**VANDUZEN STEAM PUMP**

THE BEST IN THE WORLD.

Pumps Any Kind of Liquid.

Always in Order, never Clogs nor

freezes. Every Pump Guaranteed.

10 SIZES.

200 to 12000 Gallons per Hour.

Cost \$7 to \$75 each. Address

**THE VANDUZEN & TIFT CO.,**

102 to 108 E. Second St., Cincinnati, O.

## THE MASON STEAM DAMPER REGULATOR

Is made in accordance with an entirely novel principle in the construction of damper regulators. The steam is admitted from the boiler, through a small strainer, as shown in the cut under a diaphragm which is attached to an auxiliary valve, which either lets in the steam or excludes it from the piston which works in the cylinder. This piston being forced down by the steam pressure, and carried back by the weight on the damper lever, turns a wheel from which runs the chain which is connected to the damper. By an ingenious arrangement the damper is not thrown entirely open by the slightest change of pressure in the boiler, but is gradually opened as the pressure changes, thereby not allowing sudden and great variations of draft, whereby the coal is wasted.

We manufacture only one size. The regulators are made of the best steam metal throughout, each one is nickel plated. Weight, 30 pounds. Price, \$30.00, including bracket, weight, and 25 feet of chain.

We also manufacture other steam regulating devices, for description of which, send for our catalogue.


Mason Regulator Co., Boston, Mass., U. S. A.



## Advertisements.

Inside Page, each insertion - - 75 cents a line  
Back Page, each insertion - - - \$1.00 a line  
The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may be advertised at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

**Victors**  
HIGHEST GRADE CATALOGUE FREE



**OVERMAN WHEEL CO.**  
BOSTON, WASHINGTON, DENVER, SAN FRANCISCO.  
A. G. SPALDING & BROS., Special Agents,  
CHICAGO, NEW YORK, PHILADELPHIA.

## "Spur Pointed" Wood Screws.

Patented May 10, July 19, 1887; Oct. 23, 1889;  
Aug. 19, Oct. 21, 1890; April 7, May 12, 1891;  
July 19, 1892.

## Its Advantages are:

1. Stronger than a common screw.
2. Uniform and wide slot.
3. Requires the use of but one bit in hard wood.
4. Inserted easier.
5. Centralized point.
6. Superior holding power.
7. The screw being Cold Forged, instead of Cut, leaves on its entire surface a metallic skin.

Send for samples to

**AMERICAN SCREW CO.**  
PROVIDENCE, R. I.


**THE WILMOT & HOBBS MFG. COMPANY**  
ESPECIALLY SOLICITING ORDERS FOR ROLL AND EXTRA ROLL  
PLAIN AND FINISHED ROLL AND EXTRA ROLL  
HOT ROLLED BAND, STRIP  
AND PLATE STEEL  
GREAT ACCURACY OF GAUGE WIDTH AND UNIFORMITY  
QUALITY WILL ALWAYS BE MAINTAINED  
ALSO THE CELEBRATED BRIGHT SURFACE AND ANNEALING

**COLD ROLLED SHEET AND STRIP STEEL**  
FOR DIFFICULT PRESSING, STAMPING, DRAWN WORK, ETC.



UNMATCHED QUALITY  
OF THE FINEST  
STEEL  
SHEET AND STRIP  
SHEETS OF VARIOUS  
SIZES AND THICKNESSES  
AND STRIP OF VARIOUS  
SIZES AND THICKNESSES  
AND QUALITY OF SURFACE

LARGE CONTRACTS SOLICITED FOR AUTOMATIC, HEAVY & DIFFICULT SHEET METAL  
BLANKING, STAMPING & DRAWN WORK, TUBES & NICKEL & BRASS PLATING,  
TINNING, JAPANNING & DIE MAKING. BRIDGEPORT, CONN.



**BRISTOL'S**  
**RECORDING PRESSURE GAUGE**  
Makes a continuous record, day and  
night, of Steam, Water, Gas,  
Air, and Liquid Pressure.  
Will pay for itself by insuring  
Safety and Economy in the operation  
of your plant.  
Simple in construction, accurate in  
operation, and low in price. Send  
for circular and facsimile chart.  
The Bristol Mfg. Co., Waterbury, Conn.

It winds up like any good  
stem-winding watch, in about  
five seconds.

Honest it always was; now  
it is handsome—with jeweled  
movement, enamel dial, coin-  
silver or gold-filled case;  
either lady's or gentleman's  
watch. Far better than any  
Swiss watch at the price.  
That is still low—kept down  
by American machinery and  
brains.

Ask your jeweler about it  
—The new quick-winding  
"Waterbury."

13

## PATENTS!

MESSRS. MUNN & CO., in connection  
with the publication of the SCIENTIFIC  
AMERICAN, continue to examine improve-  
ments, and to act as Solicitors of Patents  
for Inventors.

In this line of business they have had forty-five years'  
experience, and now have unequalled facilities for  
the preparation of Patent Drawings, Specifications, and the  
prosecution of Applications for Patents in the United  
States, Canada, and Foreign Countries. Messrs. Munn  
& Co. also attend to the preparation of Caveats, Copy-  
rights for Books, Labels, Reissues, Assignments, and  
Reports on Infringements of Patents. All business in-  
trusted to them is done with special care and prompt-  
ness, on very reasonable terms.

A pamphlet sent free of charge, on application, con-  
taining full information about Patents and how to pro-  
cure them; directions concerning Labels, Copyrights,  
Designs, Patents, Appeals, Reissues, Infringements,  
Assignments, Rejected Cases. Hints on the sale of  
Patents, etc.

We also send, free of charge, a Synopsis of Foreign Pa-  
tent Laws, showing the cost and method of securing  
Patents in all the principal countries of the world.

**MUNN & CO., Solicitors of Patents,**  
361 Broadway, New York.  
BRANCH OFFICES.—No. 622 and 624 F Street, Pa-  
cific Building near 7th Street, Washington, D. C.

## Westinghouse Electric and Manufacturing Co.

PITTSBURGH, PA., November 30, 1892.

LAMPS—Efficiency, Long Life. No Decrease in Candle Power.

SOCKETS—Simple, Ornamental, Reliable, Cheap.

Our New Lamps not only do not infringe the Edison Patent, but they are fully covered by patents of our own.  
By means of an important discovery the burner is rendered stable, its efficiency increased, its life prolonged, and its normal candle power maintained.

PRICES.—By reason of economies effected in the manufacture of our new lamp in large quantities by the use of special machinery, we are able to quote the following low prices:

25 and 20 Candle Power Lamps.....\$0.35 List Price  
16, 10 and 8 Candle Power Lamps.....0.30 List Price

DISCOUNTS.—Central Stations, 10 p. ct. discount; and to all others, 2½ to 10 p. ct., according to quantity.

ALLOWANCES.—A credit of ten cents will be given for every unbroken burned out lamp delivered at the factory of the Company. The saving by decreased cost of lamps and renewals should equal nearly one per cent. on the capital stock of any central station.

The constant efforts of the agents of the General Electric Company to induce our customers to exchange Generating Apparatus of our make for Thomson-Houston Generating Apparatus is fully explained by the fact that THE THOMSON-HOUSTON COMPANY PAYS 1¢, through the Consolidated Electric Light Company, Five Cents for every Incandescent Lamp it makes, for the right to sell such lamps for use in connection with Generating Apparatus of its own manufacture only.

While we do not sell our new lamp for use in connection with Thomson-Houston Generating Apparatus, the present users of the same may avail themselves of our new lamp by substituting our Generating Apparatus, the quality and efficiency of which will fully warrant the cost.

NOTE.—A dealer came to our office and stated that he had the exclusive sale of second hand apparatus for the General Electric Company; and he offered five of our Number One Alternating Current Generators for sale, to be delivered a few weeks hence, as they are still in use. We can of course commend this apparatus if in good order.

An official of a central station Lighting Company approached us recently for the exclusive right to the use of our apparatus in his town, stating that his company had already entered into a contract Form D, with the General Electric Company for the exclusive use of their apparatus. He frankly avowed that his purpose was, by securing a contract with us, to have a monopoly of electric light and power in the district covered by his station.

WE THOUGHT IT BETTER TO LEAVE THAT PLACE OPEN FOR COMPETITION.

We have also been informed that one other company had executed Form D contract of the General Electric Company. These three are the only instances we have discovered where they have succeeded in doing business in the direction of inducing users of our apparatus to discard it for apparatus made by members of the Trust.

Although we have many tons of apparatus made by the various members of the Trust, taken in the course of trade, we have not cared to offer it for sale, for we believe the sale of inferior apparatus does great harm to the electric trade in general.




We have perfected devices that can be inserted in the various sockets now in use, thereby making them standard, for the use of our new lamps. The manufacture of these in sufficient quantities to meet the demand has been unexpectedly delayed, so that the delivery of lamps and these attachments will be made only from and after January 1.

WESTINGHOUSE ELECTRIC AND MANUFACTURING CO.

**SAWS** Wanted 50,000 Sawyers **SAWS**  
and Lumbermen to  
send us their full address for a copy of Em-  
erson's Book of SAWS, new 1892 edition.  
We are first to introduce NATURAL  
Gas for heating and tempering saws with  
wonderful effect upon improving their qual-  
ity and toughness, enabling us to reduce  
prices. Address EMERSON, SMITH  
& CO. (Limited), Beaver Falls, Pa.

**NEW METHOD OF DEALING WITH  
QUICKSAND.**  
Patented in United States, Canada and European  
countries. Information given. Examinations made.  
Licenses granted. Work undertaken. Address  
Robert L. Harris, C.E., 1 Broadway, New York, N. Y.

**James Smith Woolen Machinery Co.**  
MANUFACTURERS OF  
**THE HUB FRICTION CLUTCH**  
POWER TRANSMISSION MACHINERY,  
411 to 421 Race Street,  
PHILADELPHIA, PA.

Applied to Pulleys, Gears, Sprocket Wheels, Reversible Count-  
ershafts and Cut-off Couplings. The most simple, effective,  
durable, and economical Clutch on the market. Made in sizes  
to transmit from 2 up to 1000 h. p., at slow or fast speed. Over  
10,000 in use. Write for cuts, description, price list and discounts.

**H. W. JOHNS' Asbestos**  
**Sectional Pipe Coverings.**



**Non-Conducting Coverings for Steam and Hot Water Pipes, Boilers, etc.**  
READILY ATTACHED OR REMOVED BY ANY ONE.  
**ASBESTOS BOILER COVERINGS.**  
We are prepared to take contracts for applying Steam Pipe and Boiler Coverings in any  
part of the United States.  
**H. W. JOHNS MANUFACTURING COMPANY,**  
H. W. Johns' Asbestos Millboard, Building Felts, Fire-Proof Paints, Liquid Paints,  
Asbestos Roofing, Etc.  
87 MAIDEN LANE, N. Y. JERSEY CITY, CHICAGO, PHILADELPHIA, BOSTON, ATLANTA, LONDON.

**4 to 50 H. P. THE Motor of 19th Century**  
Can be used Any Place, to do Any  
Work, and by Any One. No Boil-  
ing. No Fire! No Steam! No  
Ashest. No Gases! No Engi-  
neer! A perfectly safe Motor  
for all places and purposes. Cost  
of operation about one cent an  
hour to each indicated horse power.  
For circulars, etc., address  
**CHARTER GAS ENGINE CO.**  
P. O. Box 148, Sterling, Ill.

**AN UNUSUAL BUSINESS CHANCE.**  
The American Automatic Amusement Machine (Gip-  
sy Fortune Teller), is the best paying investment ever  
offered. Results show that a small investment brings  
large returns. State and County rights for sale. Ma-  
chines supplied, no expense, no loss, all profit. Ameri-  
can Automatic Amusement Machine Com-  
pany, 123 South 7th Street, Philadelphia.

SEND FOR CATALOGUE  
COPPER TUBES  
SHEET BRASS BRASSWIRE  
1157 N. LAKE ST.  
CHICAGO

"IMPROVEMENT THE ORDER OF THE AGE."  
**The Smith Premier Typewriter**  
Embodies the most Progressive Mechanical Principles.  
All the Essential Features Greatly Perfected.  
Perfect and Permanent Alignment.  
Easiest Running, and Nearly Silent.  
All type cleaned in Ten Seconds without Soiling the Hands.  
**The Smith Premier Typewriter Co., Syracuse, N. Y., U. S. A.**  
We have 20 branch offices in the principal cities throughout the United States.



**DO YOU WISH TO SELL YOUR INVENTION?**  
Write for particulars regarding exhibit during World's Fair. Columbia Mfg and Supply Co., Chicago.

**THE EDISON INCANDESCENT LAMP**  
Is the only Incandescent Lamp lawfully made.

All others infringe the Edison Patents, and are counterfeits.  
See decision of Court of Appeals in case of Edison Electric Light Companies, United States  
Electric Light Company, decided October 4, 1892.  
Copies of this decision will be sent on application.

**GENERAL ELECTRIC COMPANY.**  
BRANCH OFFICES:  
620 Atlantic Avenue.....Boston, Mass.  
173 and 175 Adams Street.....Chicago, Ill.  
264 West Fourth Street.....Cincinnati, O.  
Gould Building.....Atlanta, Ga.  
44 Broad Street.....New York.

509 Arch Street.....Philadelphia, Pa.  
401-407 Sibley Street.....St. Paul, Minn.  
1333 F Street N. W.....Washington, D. C.  
Masonic Temple.....Denver, Colo.  
15 First Street.....San Francisco, Cal.



## THE GRAVES ELEVATORS.

PASSENGER & FREIGHT  
L. S. GRAVES & SON ROCHESTER N. Y. NEW YORK BOSTON ST. LOUIS DETROIT

SCIENTIFIC AMERICAN SUPPLE-  
MENT. Any desired back number of the SCIENTIFIC  
AMERICAN SUPPLEMENT can be had at this office for  
10 cents. Also to be had of newsdealers in all parts of  
the country.

**ROBERT POOLE & SON CO.**  
ENGINEERS & MACHINISTS.  
TRANSMISSION MACHINERY  
MACHINE MOULDED GEARING  
SPECIAL FACILITIES FOR THE  
HEAVIEST CLASS OF WORK  
BALTIMORE, MD.

## KODAKS

For Snap-Shots Out-Doors,  
For Time Exposures In-Doors,  
For Flash-Lights at Night.

The Junior are the most compact  
camera made. Perfectly  
adapted to hand or tripod  
use. Can be used with roll  
films or glass plates. Fitted with focusing index  
and counter for exposures.

\$40 and \$50.

Send For Catalogue. EASTMAN KODAK CO.,  
Rochester, N. Y.




**THE AMERICAN BELL TELEPHONE CO.**  
95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent  
granted to Alexander Graham Bell, March  
7th, 1876, No. 174,465, and January 30th,  
1877, No. 186,787.

The transmission of Speech by all known  
forms of Electric Speaking Telephones in-  
fringes the right secured to this Company  
by the above patents, and renders each  
individual user of telephones not furnish-  
ed by it or its licensees responsible for such  
unlawful use, and all the consequences  
thereof, and liable to suit therefor.


**TOY  
TORPEDO GUN.**



A neat model of the most powerful weapon of war,  
which dictates peace to all nations. This toy is built  
on a scale about one inch to a foot, can be used in  
any parlor. For holidays nothing gives more amuse-  
ment to boys than one of these Toys; are entirely  
harmless and will even interest scientific men.

We have secured the exclusive right from Louis  
Gathmann to manufacture a toy torpedo gun, accord-  
ing to his invention and designs. Full directions  
with each gun, descriptive circular free. Price: No.  
1, \$2.00; No. 2, \$3.00; No. 3, \$4.00. On receipt we send  
this gun with two torpedoes, an iron clad as a target,  
free to any part of the United States or Canada, other  
countries exp. paid on receipt. **TOY GUN CO.,**  
248 & 250 W. Lake St., Chicago, Ill.

## FOR EVERY DESK



The Columbia daily memoranda calendar is  
ready—ample room for daily memoranda—resting  
upon metallic stand—indispensable desk neces-  
sity. To cover actual cost—there is no objection-  
able advertising upon it—this calendar will be  
sent, prepaid, upon receipt of twenty cents in  
stamps. Address, Calendar Department, Pope  
Mfg. Co., Boston, Mass.

## PRINTING INKS.

The SCIENTIFIC AMERICAN is printed with CHAS.  
BENJ. JOHNSON & CO.'S INK, Tenth and Lombard  
Sts., Philadelphia, and 47 Rose St., opp. Duane, New York